



**US Army Corps
of Engineers®**
Engineer Research and
Development Center

Field Evaluation of Hopper Dredge Overflow for the Delaware River

Jerry L. Miller, Michael R. Palermo, and Thomas W. Groff

July 2002

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.

The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.



PRINTED ON RECYCLED PAPER

Field Evaluation of Hopper Dredge Overflow for the Delaware River

by Jerry L. Miller, Michael R. Palermo

Environmental Laboratory
U.S. Army Engineer Research
and Development Center
3909 Halls Ferry Road
Vicksburg, MS 39180-6199

Thomas W. Groff

Operations Division
U.S. Army Engineer District, Philadelphia
100 Penn Square East
Philadelphia, PA 19107-3390

Final report

Approved for public release; distribution is unlimited

Contents

Preface	vi
1—Introduction	1
Background	1
Study Location	2
Purpose and Scope	4
2—Field Monitoring	5
Dredging Equipment and Sampling Operations	5
Dredge Operation Variables	5
Collection of In Situ Sediment and Site Water	5
Hopper Inflow Monitoring	6
Hopper Contents Monitoring	6
Hopper Overflow Monitoring	6
Plume Monitoring	7
Sedimentation Assessment	8
Bioassay	8
3—Data Analysis	9
Hopper Loading Characteristics	9
Coarse-grained site	9
Fine-grained site	10
Economics	10
In Situ Sediment and Background Water Samples	11
Coarse-grained site	11
Fine-grained site	11
Hopper Inflow	17
Coarse-grained site	17
Fine-grained site	17
Hopper Contents	17
Coarse-grained site	17
Fine-grained site	21
Hopper Overflow	22
Coarse-grained site	22

Fine-grained site	22
Plume Monitoring	27
Coarse-grained site	27
Fine-grained site	30
Sedimentation Results	30
Coarse-grained site	30
Fine-grained site	33
Standard Elutriate Tests	33
Coarse-grained site	34
Fine-grained site	34
Technical Findings of a 96-hr Water Column Bioassay	34
Coarse-grained site	39
Fine-grained site	39
4—Summary and Conclusions	40
Appendix A: Delaware River Sediment and Water Quality Analysis (Coarse- and Fine-Grained Sites)	A1
Appendix B: Plume Study Field Activities and Data Results	B1
Appendix C: Detection of Short-Term Sedimentation During Hopper Dredging Operations in Delaware Bay and the Delaware River	C1
Appendix D: Summary of Technical Findings: 96-hr Bioassay with <i>Mysidopsis bahia</i> and <i>Menidia beryllina</i>	D1
SF 298	

List of Figures

Figure 1. Dredge <i>McFarland</i>	1
Figure 2. Locations of the lower and upper hopper dredge overflow test study sites	3
Figure 3. Hopper loading at coarse-grained site	9
Figure 4. Hopper loading at fine-grained site	11
Figure 5. Range of gradation curves from in situ sediment collected at the coarse-grained site	12
Figure 6. Range of gradation curves from in situ sediment collected at the fine-grained site	18
Figure 7. Range of gradation curves from hopper inflow at the coarse-grained site	19

Figure 8.	Range of gradation curves from hopper inflow at the fine-grained site	20
Figure 9.	Hopper contents—solids concentrations of coarse-grained material	21
Figure 10.	Hopper contents—solids concentrations of fine-grained material	21
Figure 11.	Range of gradation curves from hopper overflow at the coarse-grained site	23
Figure 12.	Range of gradation curves from hopper overflow composites at the coarse-grained site	24
Figure 13.	Range of gradation curves from hopper overflow at the fine-grained site	25
Figure 14.	Range of gradation curves from hopper overflow composites at the fine-grained site	26
Figure 15.	Plume solids concentrations at surface	28
Figure 16.	Plume solids concentrations at middepth	28
Figure 17.	Plume solids concentrations at bottom	29
Figure 18.	Plume solids concentrations at coarse-grained site	29
Figure 19.	Plume solids concentrations at surface	31
Figure 20.	Plume solids concentrations at middepth	31
Figure 21.	Plume solids concentrations at bottom	32
Figure 22.	Plume solids concentrations at fine-grained material	32

List of Tables

Table 1	Delaware River Coarse- and Fine-Grained Loading Data .	10
Table 2	Delaware River Coarse-Grained Site, Summary of Sediment and Water Quality Data	13
Table 3	Delaware River Fine-Grained Site, Summary of Sediment and Water Quality Data	35

Preface

This report describes the potential economic benefits and potential environmental effects from overflow dredging in the lower Delaware River. This work was conducted by the Environmental Laboratory (EL), U.S. Army Engineer Research and Development Center (ERDC), Vicksburg, MS. Funding for the study was provided by the U.S. Army Engineer District, Philadelphia.

This report was written by Mr. Jerry L. Miller, Ecological Resources Branch, Ecosystem Evaluation and Engineering Division (EEED), EL, Dr. Michael R. Palermo, Environmental Processes and Engineering Division (EPED), EL, and Mr. Thomas W. Groff, Operations Division, U.S. Army Engineer District, Philadelphia. Technical review of this report was provided by Messrs. Thomas R. Patin and Jerry J. Pasquale.

This study was conducted under the direct supervision of Dr. Michael F. Passmore, Chief, Ecological Resources Branch, Dr. Dave J. Tazik, Chief, EEED, and under the general supervision of Dr. Edwin A. Theriot, Director, EL.

At the time of publication of this report, Dr. James R. Houston was Director of ERDC, and COL John W. Morris III, EN, was Commander and Executive Director.

This report should be cited as follows:

Miller, J. L., Palermo, M. R., and Groff, T. W. (2002). "Field evaluation of hopper dredge overflow for the Delaware River," ERDC/EL TR-02-17, U.S. Army Engineer Research and Development Center, Vicksburg, MS.

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.

1 Introduction

Background

The U.S. Army Engineer District (USAED), Philadelphia, has an extensive navigation responsibility throughout the Delaware River Basin. Maintenance dredging averages about $3,000,000\text{ m}^3$ ($4,000,000\text{ yd}^3$) of material annually of which about $191,000\text{ m}^3$ ($250,000\text{ yd}^3$) is removed by the Hopper Dredge *McFarland* (Figure 1). The dredging provides a safe navigation channel, which supports the shipping of nearly $136,000,000$ metric tons (150,000,000 short tons) of cargo per year.



Figure 1. Dredge *McFarland*

Hopper dredges, like the *McFarland*, are self-propelled ships equipped with propulsion machinery, hoppers for dredged material storage, and dredge pumps. Dredged material is hydraulically raised through trailing dragarms in contact with the channel bottom and is discharged into the hoppers. The material is then held in the hoppers until placed at the disposal site.

Hopper dredges are often loaded past the point of overflow for economic reasons. As the hopper is filled, dredged material is stored in the hopper bins until overflow begins. The density of the hopper contents is increased by allowing the low-density supernatant to overflow back into the waterway. As the low-density supernatant overflows, the average density of the hopper contents increase. Thus, more material can be transported per trip to the disposal site or facility. This practice of overflowing hoppers to achieve a high-density load is referred to as economic loading.

In considering overflow, there is normally a tradeoff between the potential economic benefits and potential environmental effects. Overflow results in increased water column turbidity, and supernatant solids may be redeposited near the dredge site. Also, if sediments are contaminated, the overflow may result in some release of contaminants to the water column. Therefore, the relationship between dredge production, density of the hopper load, and the rate of material overflow are important variables in maximizing the efficiency of the dredging operation while minimizing contaminant release.

State environmental resource agencies have expressed concerns regarding the turbidity, sedimentation of suspended solids, and potential contaminant release from overflow resulting from the presence of oyster seedbeds in some areas near the navigation channel. Currently, overflow is not permitted at any location within the Delaware River Basin.

There is a significant potential for economic benefits to overflow in certain reaches of the project if the impact resulting from overflow is environmentally acceptable. The USAED, Philadelphia, therefore, initiated an evaluation of the practice of overflow for select portions of the Delaware River and Delaware Bay to determine if overflow for those reaches can meet applicable water quality standards. The District requested assistance from the Environmental Laboratory (EL), U.S. Army Engineer Research and Development Center (ERDC), Vicksburg, MS, in conducting a study of overflow in the Delaware River/ Delaware Bay system.

This study helped to quantify the degree of turbidity, suspended solids, and contaminant release generated by overflow and the dispersion of the overflow plume in reaches near the oyster seedbeds. Reaches in the Delaware River Basin where overflow would be acceptable were determined.

Study Location

Two test areas were selected in the Delaware River in conjunction with recommendations from the New Jersey Department of Environmental Protection (NJDEP) and Delaware's Department of Natural Resources and Environmental Control (DNREC) (Figure 2). These areas were selected on the basis of historical knowledge of the Delaware Basin and known locations of material types (sand, silt, and clay) within the river. The first site

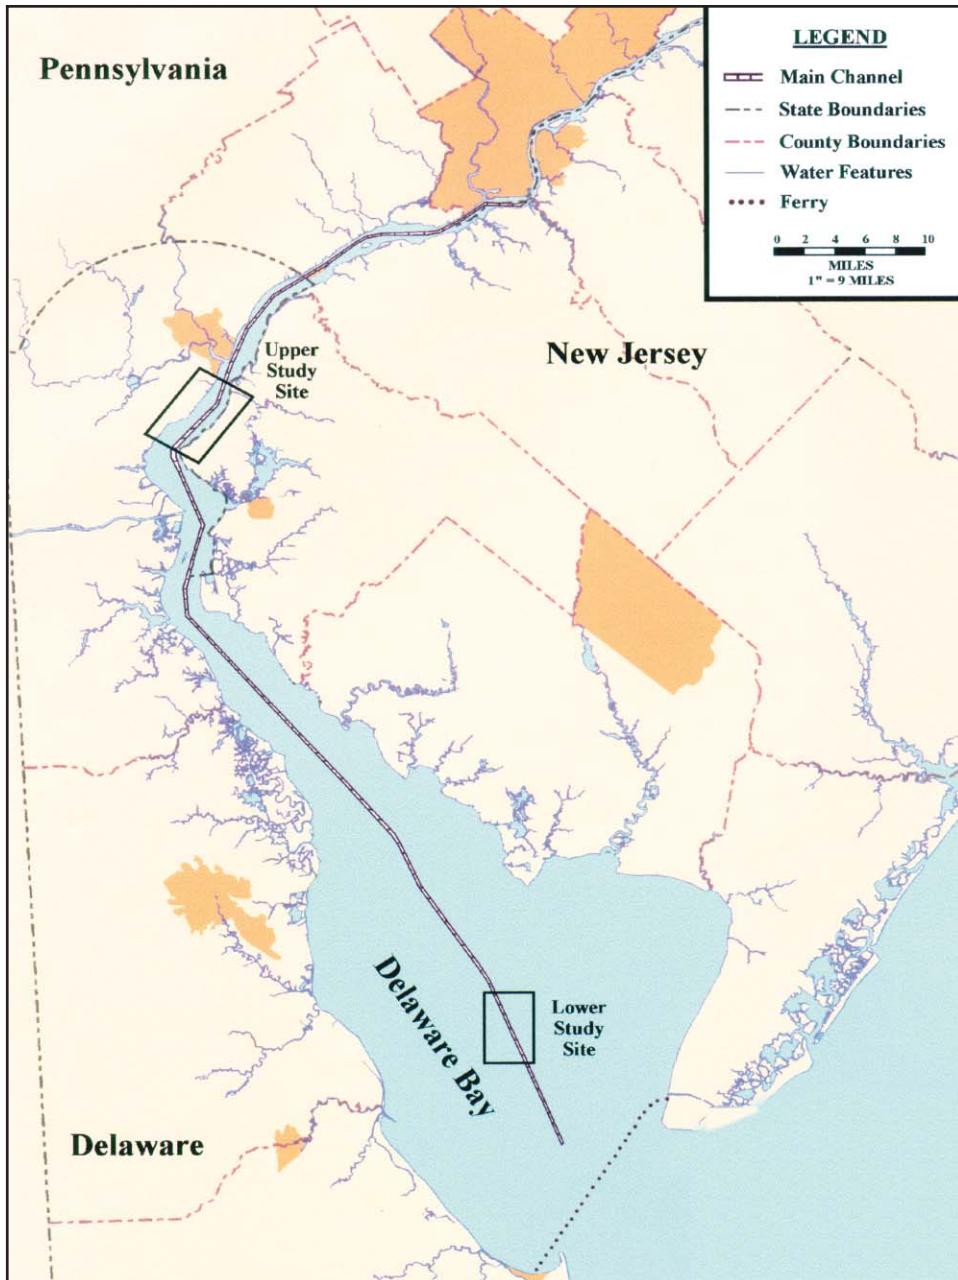


Figure 2. Locations of the lower and upper hopper dredge overflow test study sites

was located at the Brandywine range (Lower Study Site) in the lower Delaware Bay (mile marker 17.7) and was selected to represent a predominantly coarse-grained material. The second site was located at the Deepwater Point range (Upper Study Site) just below the Delaware Memorial Bridge (mile marker 67.9) and was selected to represent a typical fine-grained material. All the proposed activities for the study were reviewed with members of the Delaware River Fish Cooperative Technical Committee prior to submitting applications to the respective regulatory offices for Water Quality Certification (WQC) approvals.

Purpose and Scope

The purpose of this study was to evaluate the efficiency of economic loading of a hopper dredge and the physical and chemical characteristics of hopper overflow for the Delaware River dredging project. The study was designed to evaluate the effectiveness of increasing the hopper load during overflow and to determine the physical and chemical characteristics of the overflow into the Delaware River.

The study involved the following activities:

- a. Loading data collection - measurements of the load in the hopper at and following overflow.
- b. Characterization of in situ sediment - physical and chemical analysis including elutriate testing.
- c. Hopper inflow monitoring - physical and chemical analysis.
- d. Hopper contents monitoring - physical and chemical analysis.
- e. Hopper overflow monitoring - physical and chemical analysis.
- f. Plume monitoring - physical and chemical analysis; and in situ turbidity measurements.
- g. Sedimentation assessment - photo imagery of recent sediment deposits.
- h. Elutriate and Bioassay Testing - elutriate tests and acute toxicity testing on a fish and a crustacean species were performed for purposes of prediction and potential effects of overflow for the entire project.

These activities provided information to characterize the in situ sediment, hopper inflow as pumped from the draghead, and hopper overflow. Measurement of the material density in the hopper, solids concentration, particle size, and rate of overflow provided information for the development of hopper filling relationships. Elutriate tests were performed to predict the contaminant release back into the water column. These test results were also compared with the data results of the hopper overflow for consistency in sample analysis. Samples taken from the water column defined the relative difference between sediment resuspended by the draghead and that caused by overflow. One overflow and one nonoverflow dredge pass or overflow event was monitored in each of the two reaches of the river.

2 Field Monitoring

Dredging Equipment and Sampling Operations

The Dredge *McFarland* was used on September 15 and 16, 1998, to dredge in the two test reaches. The field sampling and monitoring was conducted during representative hopper operations with and without overflow in both reaches.

The tasks described in this technical report were the responsibility of the ERDC, Vicksburg, MS, with support provided by the USAED, Philadelphia. The USAED, Philadelphia, provided the necessary boats and personnel to assist the ERDC in all field monitoring, in situ data collection, and sample collection. ERDC staff members were present at the dredging site during the monitoring effort to direct the field efforts and assist in data and sample collection. ERDC performed all subsequent laboratory testing of samples, data analysis, and report preparation.

Dredge Operation Variables

At a minimum, it was necessary to have a complete record of the dredge operating variables during the monitoring and sampling periods. In addition to these standard dredge data, the time and duration of overflow during sampling events were recorded along with loading charts using the automated charts of the *McFarland*.

Collection of In Situ Sediment and Site Water

On September 14, in situ sediment and site water were collected at the two study sites prior to dredging to provide samples for sediment and water characterization and elutriate testing. Fifteen (15) sediment samples were taken at even intervals in a transect along which the dredge was expected to pass during overflow and nonoverflow conditions. Samples were collected with a grab-type apparatus. A 200-ml portion of the sample was

retained from each of the 15 samples for water content and density analysis (15 individual analyses). The remaining material of the 15 samples, were composited for sediment and water characterization and elutriate tests.

Composited samples were also obtained for elutriate testing from three sampling locations. Thus, five buckets and fifteen 250-ml bottles of sediment were obtained and shipped to the ERDC to characterize the in situ sediment. The five buckets of sediment were further composited to produce a single uniform composite. From this composite, standard elutriate testing was performed using the site water to prepare the samples. Density (or water content) estimates were made on all 15 samples, and the other physical and chemical tests were performed on the composite sediment sample.

Hopper Inflow Monitoring

The sediment slurry that was picked up by the draghead and transported through the hydraulic suction line was sampled as it entered the hopper (in 3-min intervals during filling and overflow). Grab samples at the inflow port(s) were collected and analyzed for solids concentration and appropriately composited and analyzed for grain size distribution, particle size distribution of fines, and chemical concentrations. The composited samples represented sediment from five equal time intervals during hopper loading.

Hopper Contents Monitoring

As material is pumped into the hoppers, a layer of high-density settled material is formed in the lower portion of the hopper with a layer of water with suspended material in the upper portion of the hopper. The vertical distribution of suspended material density or concentration in the upper portion of the hopper was measured. These data, in conjunction with overflow concentration data, can be used to determine when an economic load is achieved and when material density in the hopper is at a maximum. A second use for hopper vertical density measurements is to examine the potential for equipment modification, such as introducing settling tubes to enhance settling rates of solids in hopper bins. Hopper sampling at three depths was taken at the beginning of overflow and at the end of overflow. Three locations in the hopper were sampled.

Hopper Overflow Monitoring

Because of the variability in solids concentration at the hopper overflow, 40 samples were taken to determine suspended solids for each overflow

period. Samples were composited for chemical contaminant determination of chemical concentrations, grain size, particle size distribution of fines, and toxicity testing.

Plume Monitoring

Plume monitoring provided an evaluation of the amount of sediment in the water column resuspended by the operating draghead vs. the amount of sediment contributed by overflow. Data on plume concentrations as a function of distance and time provided information to determine an appropriate buffer distance from the oyster beds in which overflow should be restricted. Differentiation between the magnitude of sediment plumes caused by the draghead and plumes from overflow materials required monitoring both overflow and nonoverflow periods. Monitoring one dredge pass without overflow and one dredge pass with overflow was the minimal plume monitoring effort. To reduce the variability of results between tests, the dredge was required to be moving in the same direction relative to the current flow for every overflow and nonoverflow test monitored. Plume monitoring also provided information on contaminant dispersion in the water column.

Plume monitoring required two boats. One boat was positioned behind the hopper dredge in its path immediately after it passed and began sampling the water column to evaluate the rate of settling of the plume. The other boat towed a turbidimeter (in situ-type probe) across the plume to give information on lateral plume dispersion. Thus, the duration and geometry of the plume could be estimated. Both boats in the monitoring area carried out background sampling immediately before the dredging began.

Lateral plume dispersion measurements were made at middepth by locating the turbidimeter probe at the midpoint of the water column. Background turbidity was extensively measured. The boat towing the turbidimeter monitored distance from the dredge, using a range finder and hand bearing compass, and distance from the anchored sample boat. The whole plume was traversed, going outside of the plume at each extreme of the turbidity plume.

While the mobile boat was measuring lateral plume dispersion, the anchored boat measured decay of the plume as it settled through the water column. Water samples were taken at the surface (less than 1 m deep), middepth, and near bottom (within 1 to 2 m of the bottom). Fifteen samples at three depths for a 50-min period were taken to characterize background total suspended solids (TSS) conditions, and about 30 samples at three depths in a 30-min time frame were taken to characterize the overflow plume after the dredging pass. The latter sampling protocol was also used for the nonoverflow sediment plume measurements.

TSS was measured for all plume samples and a compositing scheme was used to reduce the number of samples for chemical analysis. Three compos-

ite samples for the plume monitoring were obtained (one at each of the three depths) by mixing portions of the samples taken at all three depths over one-third of the plume monitoring effort. Chemical analysis included heavy metals, polychlorinated biphenyls (PCBs) and polycyclic aromatic hydrocarbons (PAHs) and provided data on potential contamination of the water column by the dredging operation.

Sedimentation Assessment

One difficulty in assessing potential impacts of sedimentation resulting from hopper overflow is detection of thin overburdens in habitats in the vicinity of the dredging operation. Although thin (<5 cm) overburdens could have detrimental impacts, for example on the settlement and attachment of oyster larvae, this exceeds the detection limits of most conventional techniques. One method effective in measuring sedimentation events of less than 1 cm is sediment-profiling imagery using a sediment profile camera. This technique involves insertion of a prism into the substrate through which images of the sediment-water interface are obtained. The images provide rapid, accurate measures of recent sedimentation, particularly if the overburden sediments are dissimilar from the ambient substrate. The images also provide indications of impacts to benthic communities (e.g., distribution and position of annelid worms and bivalve mollusks relative to the relict and overburden surface) and changes in physical/chemical conditions of the sediment (e.g., altered redox potential discontinuity, evidence of hypoxia). This camera system is unaffected by ambient turbidity. An attached plan-view underwater camera also provided photographs at the sediment profile stations.

The sediment profiling camera system was deployed at the Delaware River overflow operation site. Because the area is tidally influenced, stations were occupied both up and down current from the dredging project. Stations were allocated to gather information for transects across several cross sections of the river reach potentially influenced by overflow, including any charted oyster bars.

Bioassay

Samples were taken at the hopper overflow for use in a 96-hr water column bioassay. This portion of the study will help in determining the possible biological effects of water column exposure to Delaware River sediment.

3 Data Analysis

Hopper Loading Characteristics

Coarse-grained site

The loading data provided by the USAED, Philadelphia, for the coarse-grained site are shown in Figure 3, and the summary data for the load increase can be found in Table 1. Loading volumes are based on calculations using historical density data in the area being dredged.

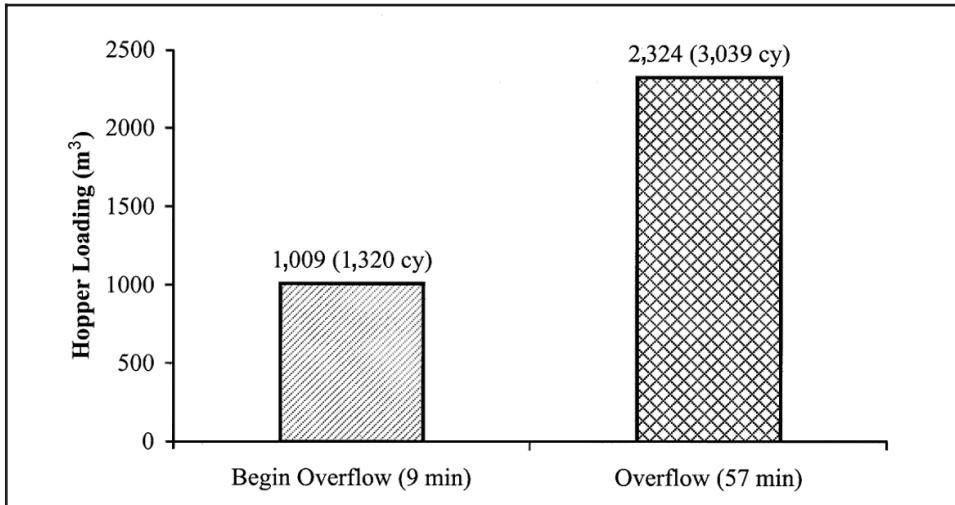


Figure 3. Hopper loading at coarse-grained site

It took 9 min of dredging to reach overflow status. During the first 9 min, material increased at a rate of $112.4 \text{ m}^3/\text{min}$ ($147 \text{ yd}^3/\text{min}$). Once overflow began, the increase in material loading was determined to be $22.9 \text{ m}^3/\text{min}$ ($30 \text{ yd}^3/\text{min}$). Overflow continued for 57 min with a gain of 130 percent realized. At the end of the overflow period, the hopper was full of sediment.

Table 1
Delaware River Coarse- and Fine-Grained Loading Data

Coarse-Grained Material			Fine-Grained Material		
Time, min	Loading, m ³	Loading, yd ³	Time, min	Loading, m ³	Loading, yd ³
0	0		0	0	
9	1,009 Begin overflow (9 min)		13	871 Begin overflow (13 min)	
66	2,324 Overflow (57 min)	1,320 3,039	34	1,031 Overflow (21 min)	1,139 1,348
			0	0	
			13	871 Begin overflow (13 min)	1,139
			18	961 Overflow (5 min)	1,257
Time, min	Loading m ³ /min	Losing to Overflow m ³ /min	% Gain	Time, min	Loading m ³ /min
9	112.4			13	67.0
57	22.9	89.5	130.3	21	7.6
				5	18.0
					59.4
					49.0
					18.4
					10.3

Fine-grained site

The loading diagram for the fine-grained site is shown in Figure 4 and the summary data for the load increase can be found in Table 1. For this site, the dredge operated 13 min before overflow began. During this first 13 min of dredging, material increased at a rate of $67.0 \text{ m}^3/\text{min}$ ($87 \text{ yd}^3/\text{min}$). Once overflow began, the increase in material loading was determined to be $7.6 \text{ m}^3/\text{min}$ ($10 \text{ yd}^3/\text{min}$). Overflow continued for 21 min with a gain of 18 percent realized. The percent gain realized for the coarse reach was interpolated for 21 min and was 50 percent, so that a comparison could be made during the same time frame between the two sites.

Economics

These results are consistent with the material composition at the two sites. The coarse-grained site would be expected to settle at a more rapid rate, therefore, showing a significant gain in material. Whereas, the fine-grained material would tend to stay in suspension, resulting in most of the sediment being discharged out the overflow. Because of the large amount of gain realized at the coarse-grained site, a rate of return of about 50 to 60 percent may be realized based on the amount of material retained in the hopper and the round-trip travel time required to the dump site. Basically, for every 3 days of nonoverflow dredging, approximately the same amount of material can be removed by allowing overflow dredging in a 2-day period. This percent return also assumes that the material being discharged in the overflow settles in the navigation channel and will require redredging the area. At the fine-grained site, the rate of return is negligible because of the small gain in load achieved. This is also based on round-trip travel time required to the pump-out site, material being discharged in the overflow settling in the navigation channel and requiring redredging of the area. If

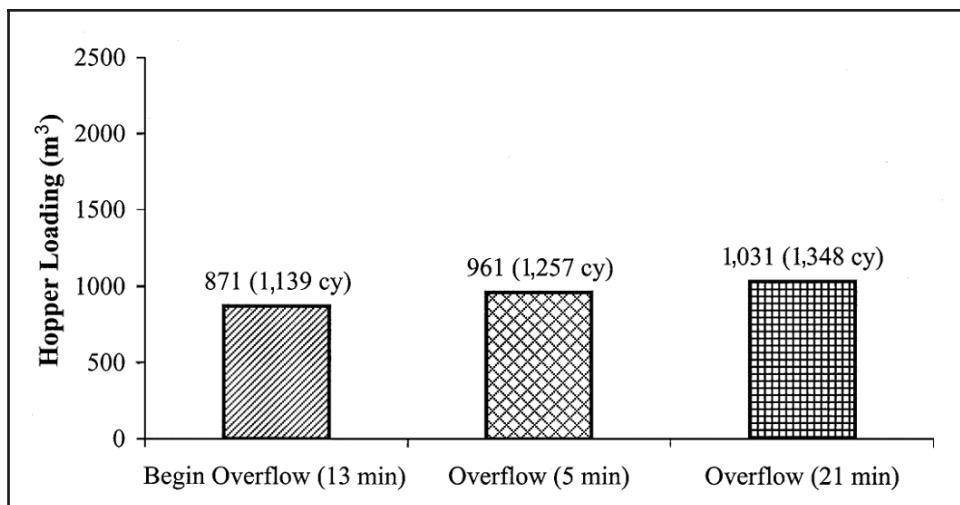


Figure 4. Hopper loading at fine-grained site

redredging the area at either site is not required, then the percent return estimated at those sites may increase.

In Situ Sediment and Background Water Samples

Coarse-grained site

The composited sediment samples at the coarse-grained site show the proposed dredged area to average 97 percent sand (Figure 5). The range was less than 1 percent \pm of the average value (96.5 to 97.7 percent). Background water chemical concentrations were compared with the contaminants of concern as listed in the acute marine objectives for toxic pollutants for the protection of aquatic life in the Delaware River estuary. This information can be found in the Delaware River Basin Commission West Trenton, New Jersey, Administrative Manual-Part III, Water Quality Regulations, October 23, 1996. The only parameter above the standard was background dissolved copper (Table 2). The standard for copper is 5.3 $\mu g/l$, and the background value was 13 $\mu g/l$. The water quality and sediment data for the coarse-grained site can be found in Appendix A.

Fine-grained site

The composited sediment samples at the fine-grained site show the proposed dredged area to average 33 percent sand (Figure 6). The range for sand was from 18 to 50 percent. Background water concentrations for the contaminants of concern were all below the more stringent of the freshwater or marine stream quality objectives for acute toxicity standards as

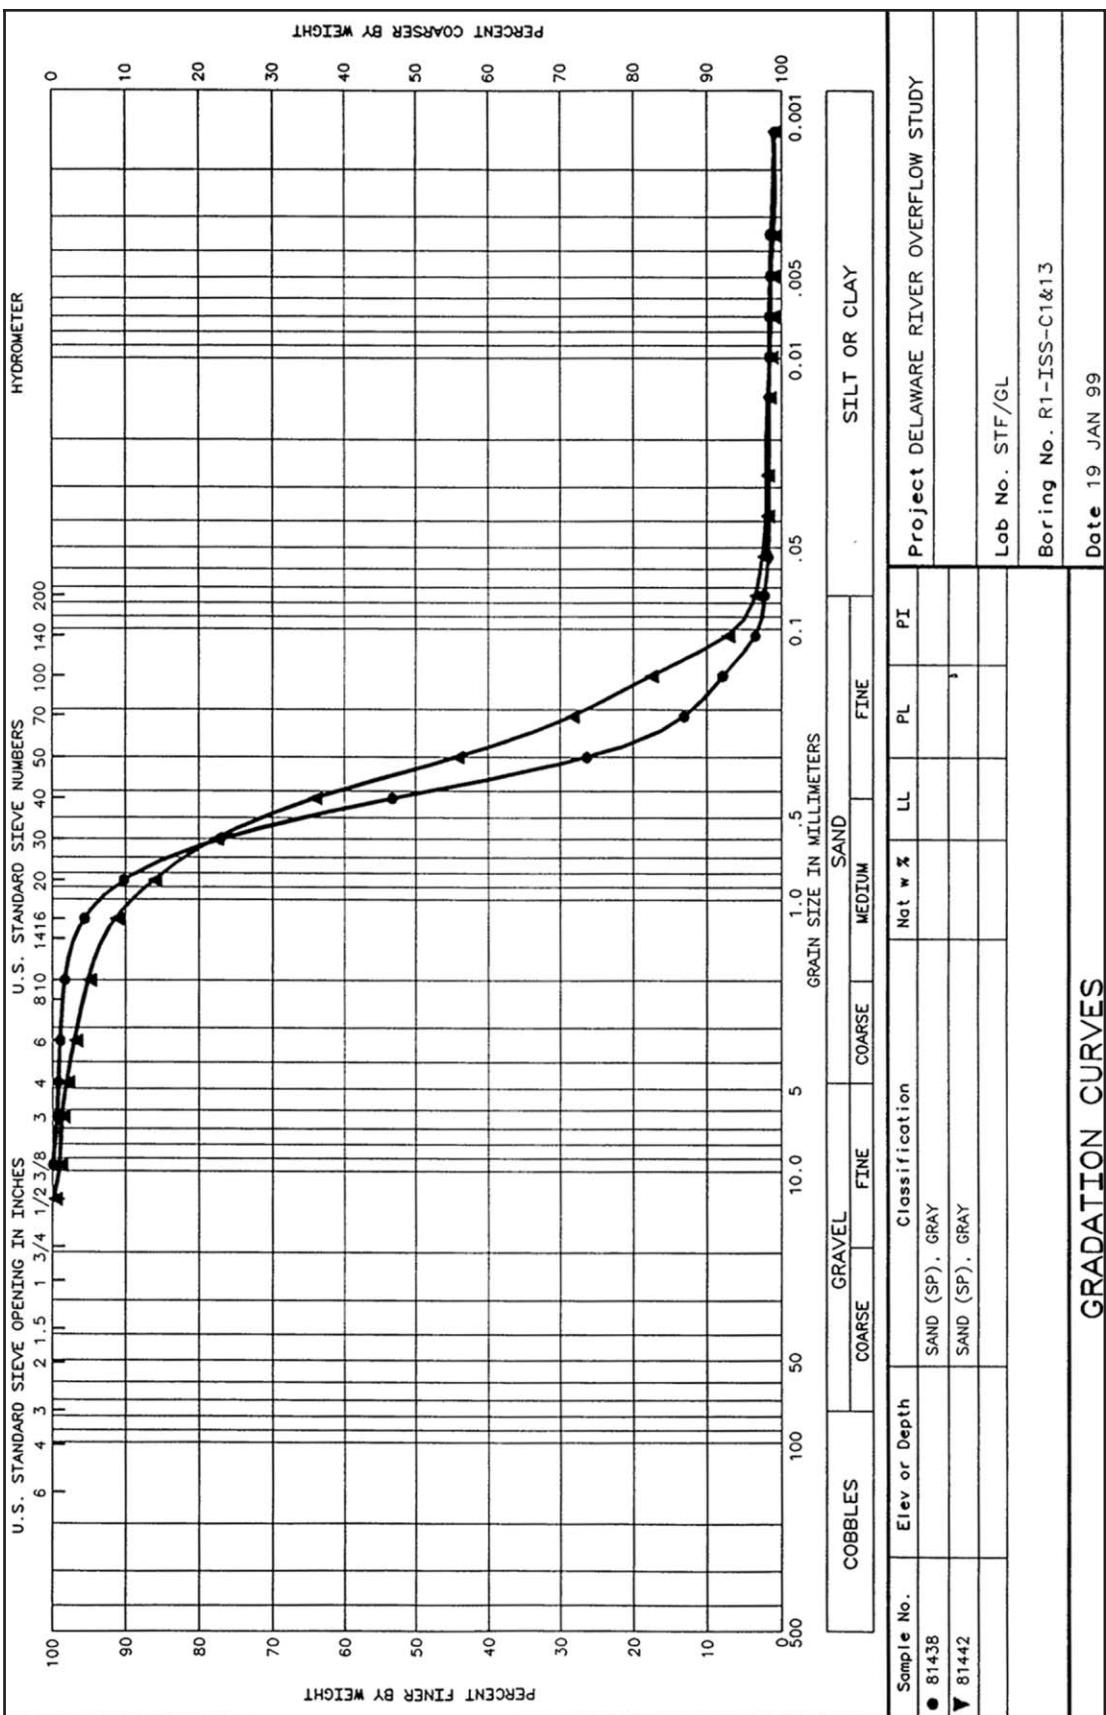


Figure 5. Range of gradation curves from in situ sediment collected at the coarse-grained site

Table 2
Delaware River Coarse-Grained Site, Summary of Sediment and Water Quality Data

PARAMETER	SEDIMENT CONC mg/kg	DETECTION LIMIT µg/l	WATER QUALITY STANDARDS ¹ µg/l	BACKGROUND CONC µg/l	ELUTRIATE CONC µg/l	OVERFLOW CONC µg/l
2-METHYLNAPHTHALENE	0.000	0.3000	NL	BD	BD	BD
A-BHC	0.000	0.0250	NL	BD	BD	BD
A-ENDOSULFAN	0.000	0.0250	NL	BD	BD	BD
ACENAPHTHENE	0.000	0.3000	20	BD	BD	BD
ACENAPHTHYLENE	0.000	0.3000	NL	BD	BD	BD
ALDRIN	0.000	0.0250	0.65	BD	BD	BD
ALUMINUM (Al)	1673.000	25.0000	NA	BD	BD	BD
ANTHRACENE	0.000	0.3000	NL	BD	BD	BD
ANTIMONY	0.000	3.0000	NL	BD	BD	BD
ARSENIC (As)	3.170	2.0000	69	44.0000	49.6667	46
B-BHC	0.001	0.0250	NL	BD	BD	BD
B-ENDOSULFAN	0.000	0.0500	NL	BD	BD	BD
BARIUM (Ba)	4.900	2.0000	NL	39.0000	91.6667	117
BENZO(a)ANTHRACENE	0.017	0.3000	NL	BD	BD	BD
BENZO(G, H, I)PERYLENE	0.017	0.3000	NL	BD	BD	BD
BENZO(a)PYRENE	0.022	0.3000	NL	BD	BD	BD
BENZO(b)FLUORANTHENE	0.021	0.3000	NL	BD	BD	BD
BENZO(k)FLUORANTHENE	0.022	0.3000	NL	BD	BD	BD
BERYLLIUM (Be)	0.200	1.0000	NL	BD	BD	BD
CADMIUM (Cd)	0.000	0.2000	43	BD	BD	BD
CHROMIUM (TRI) (Cr)	6.300	2.0000	NA	BD	2.0000	BD
CHRYSENE	0.019	0.3000	NL	BD	BD	BD
COBALT (Co)	2.300	2.0000	NL	BD	BD	BD
COPPER (Cu)	2.330	1.0000	5.3	13.0000	7.0000	5
D-BHC	0.000	0.0250	NL	BD	BD	BD
DIBENZO(A, H)ANTHRACENE	0.002	0.3000	NL	BD	BD	BD
DIELDRIN	0.001	0.0500	0.355	BD	BD	BD
ENDOSULFAN SULFATE	0.000	0.0500	NL	BD	BD	BD
ENDRIN	0.000	0.0500	0.019	BD	BD	BD
ENDRIN ALDEHYDE	0.000	0.0500	NL	BD	BD	BD
FLUORANTHENE	0.010	0.3000	NL	BD	BD	BD
FLUORENE	0.000	0.3000	NL	BD	BD	BD
G-BHC	0.003	0.0250	0.08	BD	BD	BD

Table 2 (Continued)

PARAMETER	SEDIMENT CONC mg/kg	DETECTION LIMIT µg/l	WATER QUALITY STANDARDS ¹ µg/l	BACKGROUND CONC µg/l	ELUTRIATE CONC µg/l	OVERFLOW CONC µg/l
HEPTACHLOR	0.001	0.0250	0.027	BD	BD	BD
HEPTACHLOR EPOXIDE	0.002	0.0250	NL	BD	BD	BD
INDENO(1, 2, 3-C, D) PYRENE	0.021	0.3000	NL	BD	BD	BD
IRON (Fe)	5903.000	20.0000	NL	BD	BD	BD
LEAD (Pb)	12.300	1.0000	220	BD	BD	BD
MANGANESE (Mn)	94.800	1.0000	NL	6.0000	1.66667	BD
MERCURY (Hg)	0.093	0.2000	2.1	BD	BD	BD
METHOXYCHLOR	0.000	0.2500	NL	BD	BD	BD
NAPHTHALENE	0.000	0.3000	NL	BD	BD	BD
NICKEL (Ni)	3.300	1.0000	75	9.0000	5.00000	9
TOTAL PCB's			5.0			
PCB 101	0.000	0.0010	NL	BD	0.0010	BD
PCB 105	0.000	0.0010	NL	BD	BD	BD
PCB 110	0.000	0.0010	NL	BD	BD	BD
PCB 114	0.000	0.0010	NL	BD	BD	BD
PCB 118	0.000	0.0010	NL	BD	BD	BD
PCB 119	0.000	0.0010	NL	BD	BD	BD
PCB 120	0.000	0.0010	NL	BD	BD	BD
PCB 121	0.000	0.0010	NL	BD	BD	BD
PCB 123	0.000	0.0010	NL	BD	BD	BD
PCB 126	0.000	0.0010	NL	BD	BD	BD
PCB 127	0.000	0.0010	NL	BD	BD	BD
PCB 128	0.000	0.0010	NL	BD	BD	BD
PCB 132	0.000	0.0010	NL	BD	BD	BD
PCB 135	0.000	0.0010	NL	BD	BD	BD
PCB 136	0.000	0.0010	NL	BD	BD	BD
PCB 137	0.000	0.0010	NL	BD	BD	BD
PCB 138	0.000	0.0010	NL	BD	BD	BD
PCB 141	0.000	0.0010	NL	BD	BD	BD
PCB 146	0.000	0.0010	NL	BD	BD	BD
PCB 149	0.000	0.0010	NL	BD	BD	BD
PCB 151	0.000	0.0010	NL	BD	BD	BD
PCB 153	0.000	0.0010	NL	BD	BD	BD
PCB 156	0.000	0.0010	NL	BD	BD	BD
PCB 157	0.000	0.0010	NL	BD	BD	BD
PCB 158	0.000	0.0010	NL	BD	BD	BD
PCB 166	0.000	0.0010	NL	BD	BD	BD
PCB 167	0.000	0.0010	NL	BD	BD	BD
PCB 168	0.000	0.0010	NL	BD	BD	BD

Table 2 (Continued)

PARAMETER	SEDIMENT CONC mg/kg	DETECTION LIMIT µg/l	WATER QUALITY STANDARDS ¹ µg/l	BACKGROUND CONC µg/l	ELUTRIATE CONC µg/l	OVERFLOW CONC µg/l
PCB 169	0.000	0.00010	NL	BD	BD	BD
PCB 170	0.000	0.00010	NL	BD	BD	BD
PCB 171	0.000	0.00010	NL	BD	BD	BD
PCB 174	0.000	0.00010	NL	BD	BD	BD
PCB 177	0.000	0.00010	NL	BD	BD	BD
PCB 178	0.000	0.00010	NL	BD	BD	BD
PCB 179	0.000	0.00010	NL	BD	BD	BD
PCB 18	0.000	0.00010	NL	BD	BD	BD
PCB 180	0.000	0.00010	NL	BD	BD	BD
PCB 182	0.000	0.00010	NL	BD	BD	BD
PCB 183	0.000	0.00010	NL	BD	BD	BD
PCB 185	0.000	0.00010	NL	BD	BD	BD
PCB 187	0.000	0.00010	NL	BD	BD	BD
PCB 189	0.000	0.00010	NL	BD	BD	BD
PCB 190	0.000	0.00010	NL	BD	BD	BD
PCB 191	0.000	0.00010	NL	BD	BD	BD
PCB 194	0.000	0.00010	NL	BD	BD	BD
PCB 195	0.000	0.00010	NL	BD	BD	BD
PCB 196	0.000	0.00010	NL	BD	BD	BD
PCB 198	0.000	0.00010	NL	BD	BD	BD
PCB 200	0.000	0.00010	NL	BD	BD	BD
PCB 201	0.000	0.00010	NL	BD	BD	BD
PCB 203	0.000	0.00010	NL	BD	BD	BD
PCB 205	0.000	0.00010	NL	BD	BD	BD
PCB 206	0.000	0.00010	NL	0.0020	0.0024	0.0017
PCB 207	0.000	0.00010	NL	BD	BD	BD
PCB 208	0.000	0.00010	NL	0.0012	0.0012	BD
PCB 22	0.000	0.00010	NL	BD	BD	BD
PCB 28	0.000	0.00010	NL	BD	BD	BD
PCB 31	0.000	0.00010	NL	0.0029	0.0029	BD
PCB 33	0.000	0.00010	NL	BD	BD	BD
PCB 37	0.000	0.00010	NL	BD	BD	BD
PCB 40	0.000	0.00010	NL	BD	BD	BD
PCB 42	0.000	0.00010	NL	0.0014	0.0014	BD
PCB 44	0.000	0.00010	NL	BD	BD	BD
PCB 47	0.000	0.00010	NL	BD	BD	BD
PCB 49	0.000	0.00010	NL	BD	BD	BD
PCB 52	0.000	0.00010	NL	0.0010	0.0010	BD
PCB 60	0.000	0.00010	NL	BD	BD	BD

Table 2 (Concluded)

PARAMETER	SEDIMENT CONC mg/kg	DETECTION LIMIT µg/l	WATER QUALITY STANDARDS ¹ µg/l	BACKGROUND CONC µg/l	ELUTRIATE CONC µg/l	OVERFLOW CONC µg/l
PCB 64	0.000	0.00010	NL	BD	BD	BD
PCB 66	0.000	0.00010	NL	BD	BD	BD
PCB 70	0.000	0.00010	NL	BD	BD	BD
PCB 74	0.000	0.00010	NL	BD	BD	BD
PCB 77	0.000	0.00010	NL	BD	BD	BD
PCB 8	0.000	0.00010	NL	BD	BD	BD
PCB 80	0.000	0.00010	NL	BD	BD	BD
PCB 81	0.000	0.00010	NL	BD	BD	BD
PCB 82	0.000	0.00010	NL	BD	BD	BD
PCB 84	0.000	0.00010	NL	BD	BD	BD
PCB 86	0.000	0.00010	NL	BD	BD	BD
PCB 87	0.000	0.00010	NL	BD	BD	BD
PCB 91	0.000	0.00010	NL	BD	BD	BD
PCB 92	0.000	0.00010	NL	BD	BD	BD
PCB 95	0.000	0.00010	NL	BD	BD	BD
PCB 97	0.000	0.00010	NL	BD	BD	BD
PCB 99	0.000	0.00010	NL	BD	BD	BD
PHENANTHRENE	0.001	0.3000	NL	BD	BD	BD
PPDDD	0.000	0.0500	NL	BD	BD	BD
PPDDE	0.000	0.0500	NL	BD	BD	BD
PPDTT	0.000	0.0500	NL	BD	BD	BD
PYRENE	0.013	0.3000	NL	BD	BD	BD
SELENIUM (Se)	0.866	2.0000	300	152.0000	167.6667	160
SILVER (Ag)	0.333	1.0000	2.3	BD	1.0000	BD
THALLIUM (Tl)	0.000	2.0000	NL	BD	BD	BD
TOC-TOTAL ORGANIC CARBON	166.700	3000.0000	NL	BD	BD	13160
TOXAPHENE	0.000	0.2500	0.21	BD	BD	BD
VANADIUM (V)	4.130	1.0000	NL	2.0000	1.6667	4
ZINC (Zn)	29.200	10.0000	95	BD	28.0000	27
a-CHLORDANE	0.000	0.0250	NL	BD	BD	BD
b-CHLORDANE	0.002	0.0250	NL	BD	BD	BD

¹Marine Objectives AcuteBD = below detection
NA = not applicableNL = not listed
0.000 = below detection for sediment conc. (mg/kg)

found in the Delaware River Basin Commission West Trenton, New Jersey, Administrative Manual-Part III, Water Quality Regulations, October 23, 1996. Only two exceedances were found in the dissolved overflow water (Table 3). Endrin was measured at a concentration of 0.0754 µg/l as compared to the standard of 0.019 µg/l. Zinc was measured at a concentration of 131 µg/l as compared to the standard of 95 µg/l. See Appendix A for the Delaware River water quality and sediment analysis for the fine-grained site.

Hopper Inflow

Coarse-grained site

Samples collected for grain-size distribution at the hopper inflow at the coarse-grained site averaged 84 percent sand (Figure 7). The range was from 52 to 98 percent. Eliminating the 52-percent sample resulted in a sandy composition of 92 percent with a range from 86 to 98 percent. This is more representative of that collected from the in situ sampling. Suspended solids concentrations in the hopper inflow could not be accurately determined because the coarse-grained material rapidly settled to the bottom of the sampling buckets, and the total bucket sample was not retained for analysis.

Fine-grained site

Samples collected for grain-size distribution at the hopper inflow at the fine-grained site averaged 12 percent sand (Figure 8). The range was from 9 to 15 percent. This is much less than the 33 percent represented by the in situ sampling.

Hopper Contents

Coarse-grained site

Suspended solids concentrations in the hopper at the coarse-grained site were <15 g/l (Figure 9). This indicates that settling was occurring very rapidly. Although the samples should be representative of the water column, it should be realized that the agitation occurring inside the hopper will keep the material in suspension for an extended period of time. Therefore, when the sample was collected, the material being agitated quickly settled and was not collected in the 250-ml sample bottle.


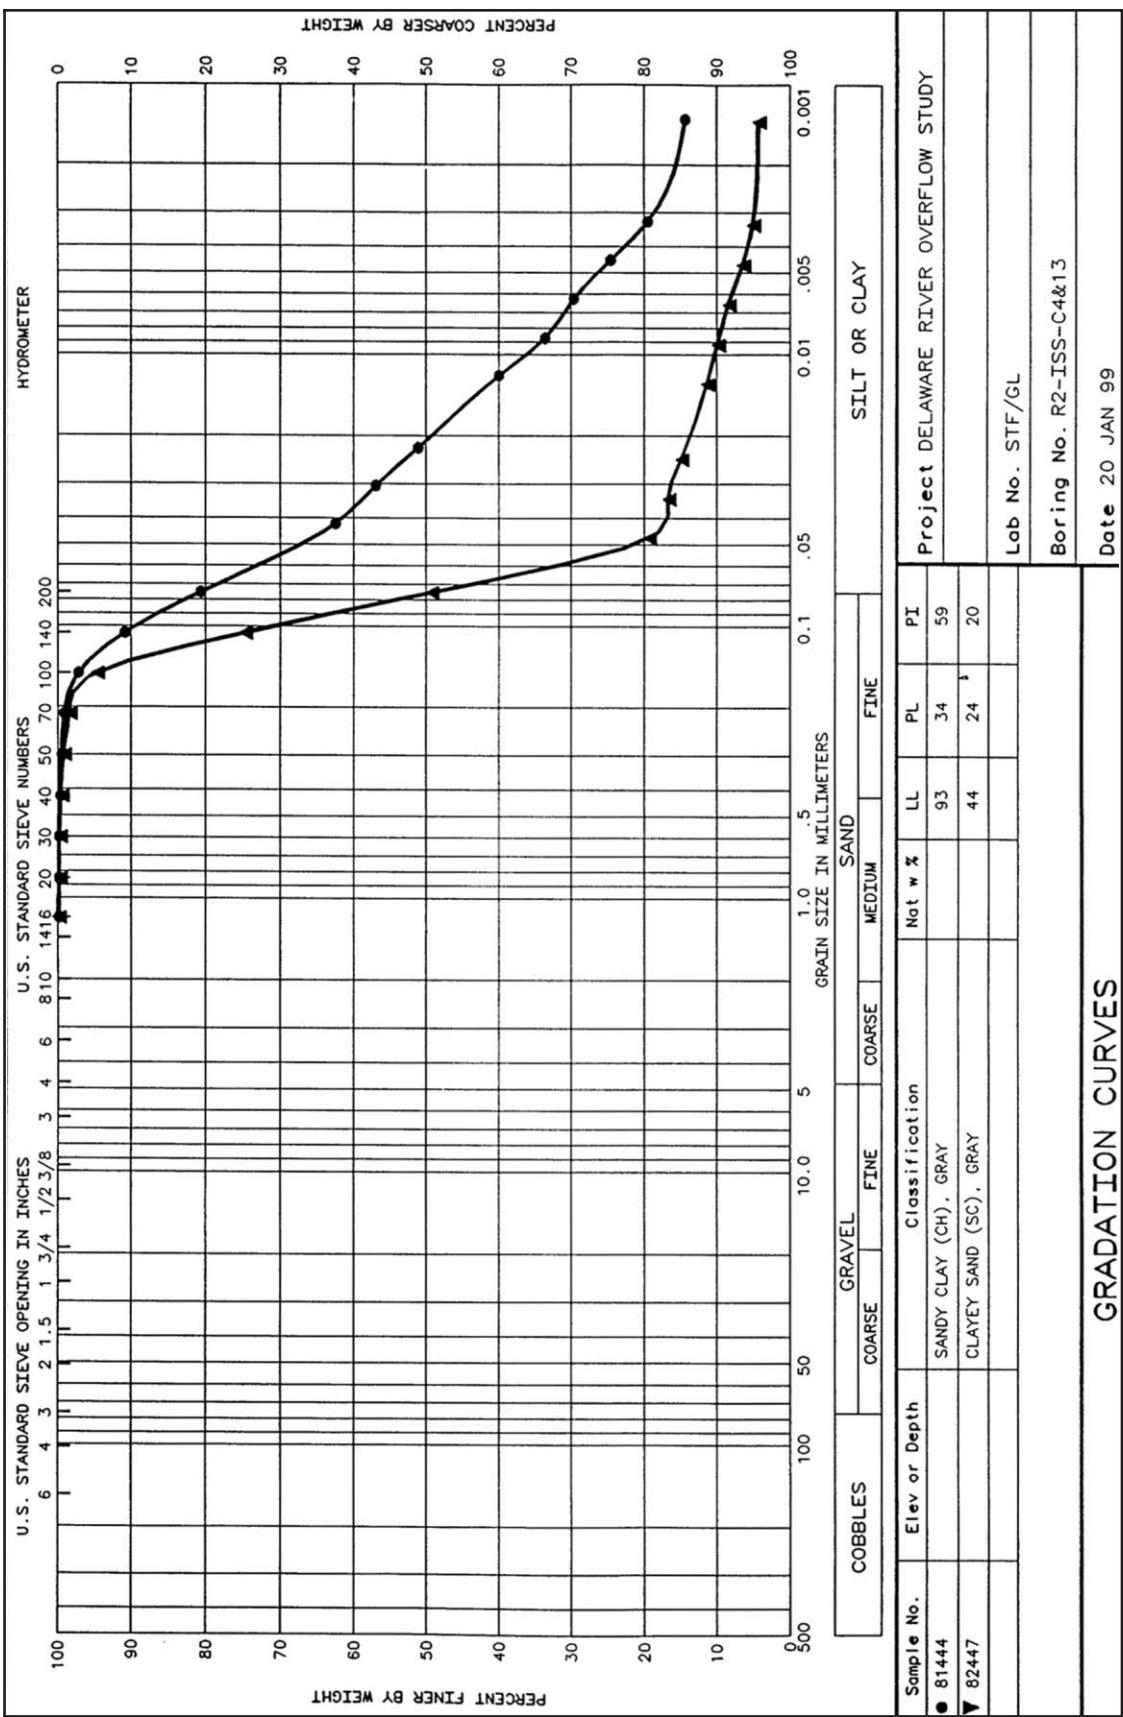


Figure 6. Range of gradation curves from in situ sediment collected at the fine-grained site

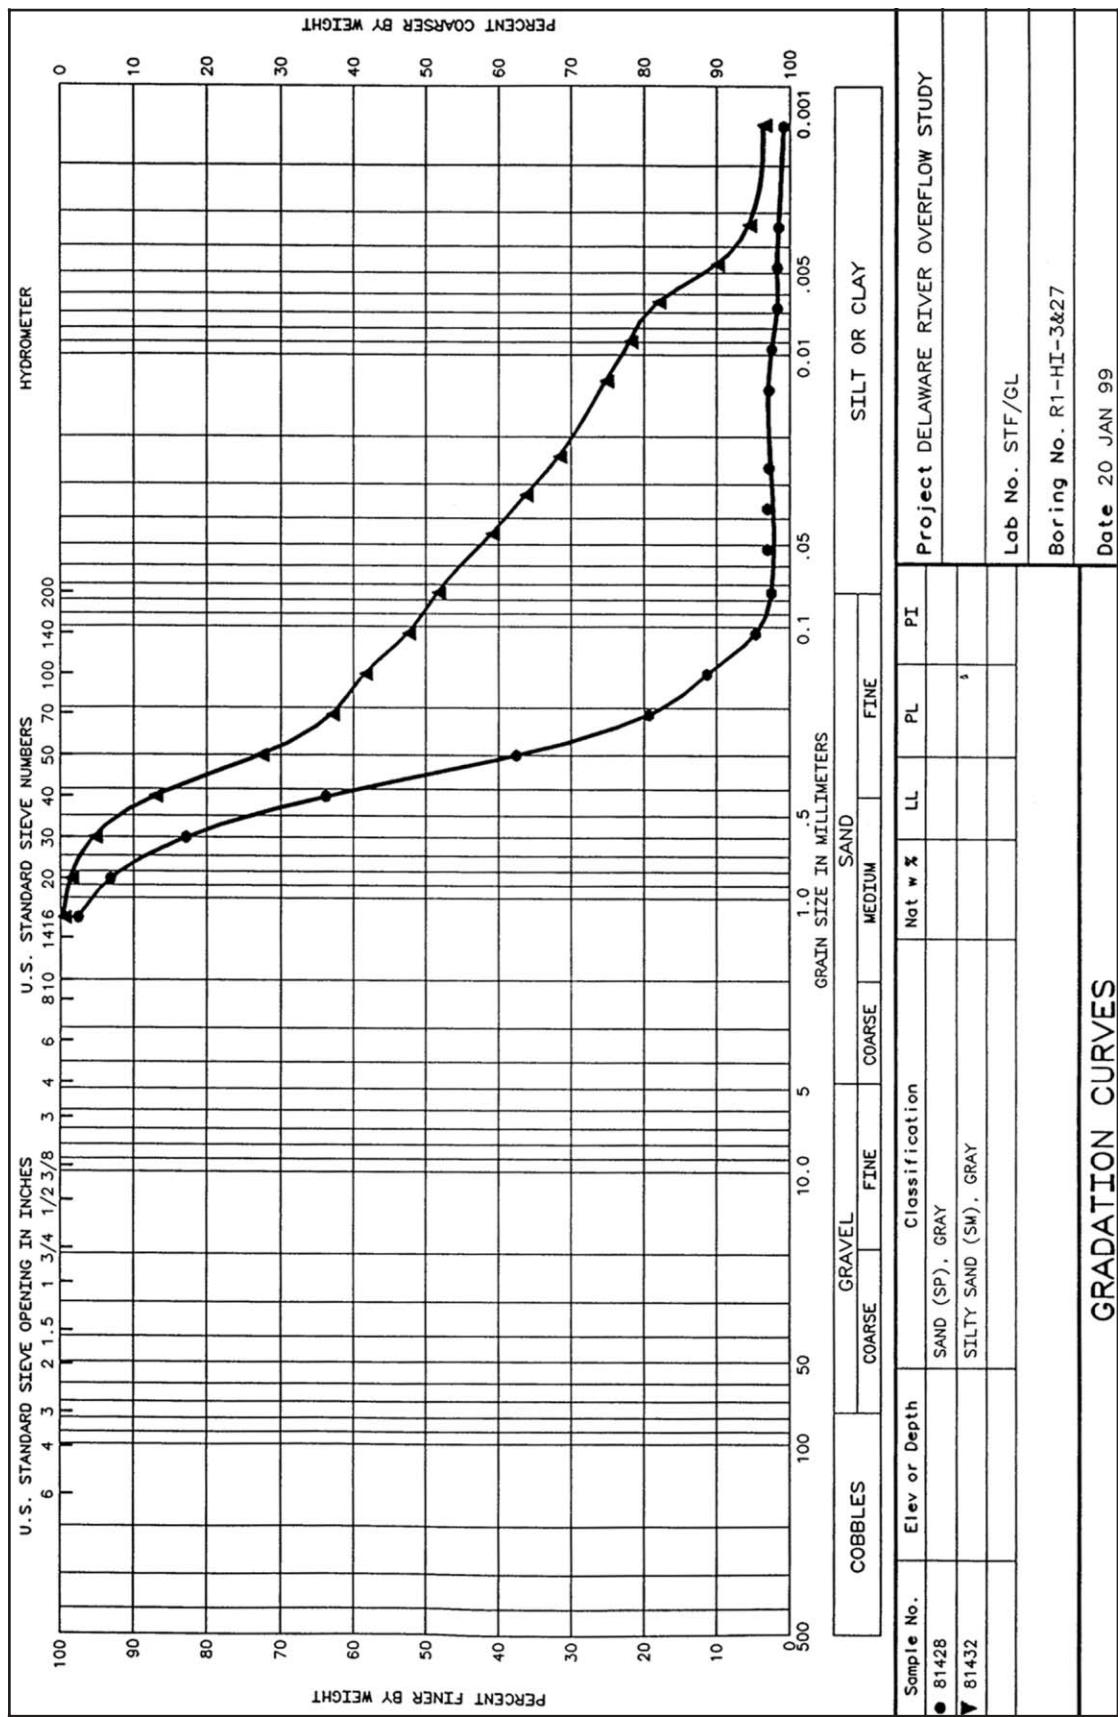

Chapter 3 Data Analysis

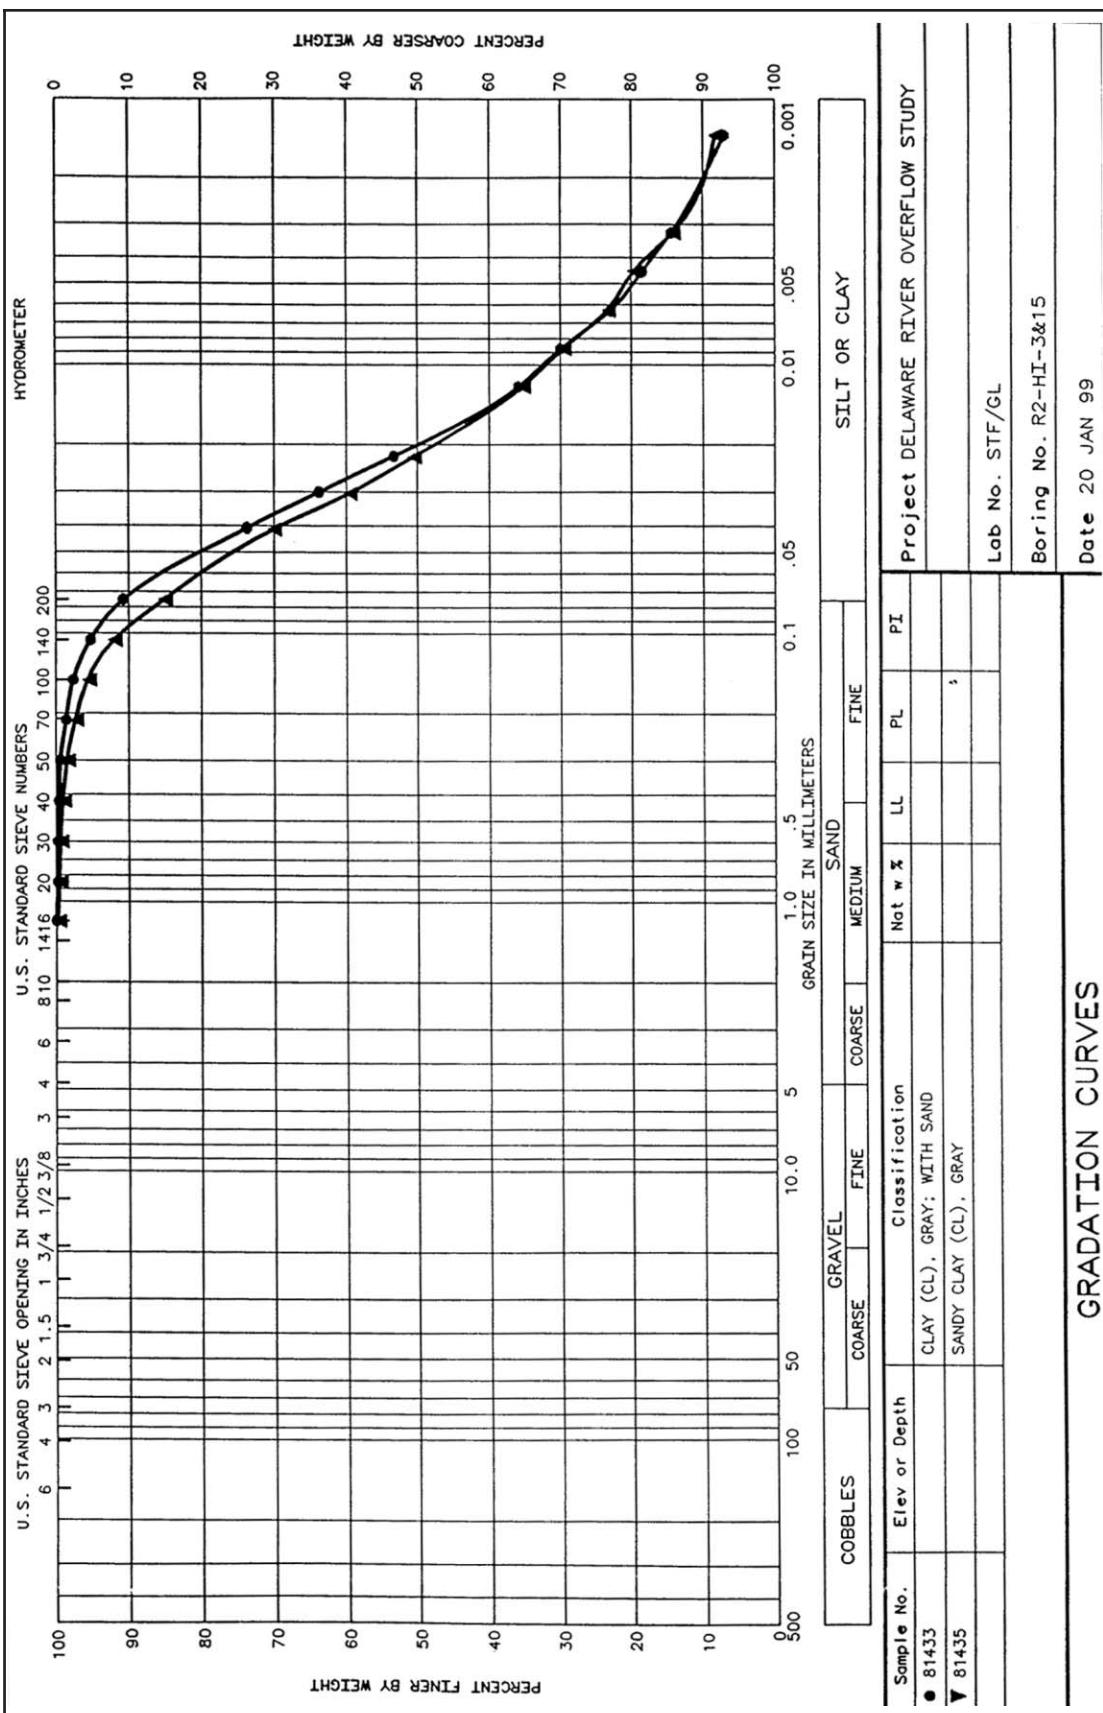


Figure 8. Range of gradation curves from hopper inflow at the fine-grained site

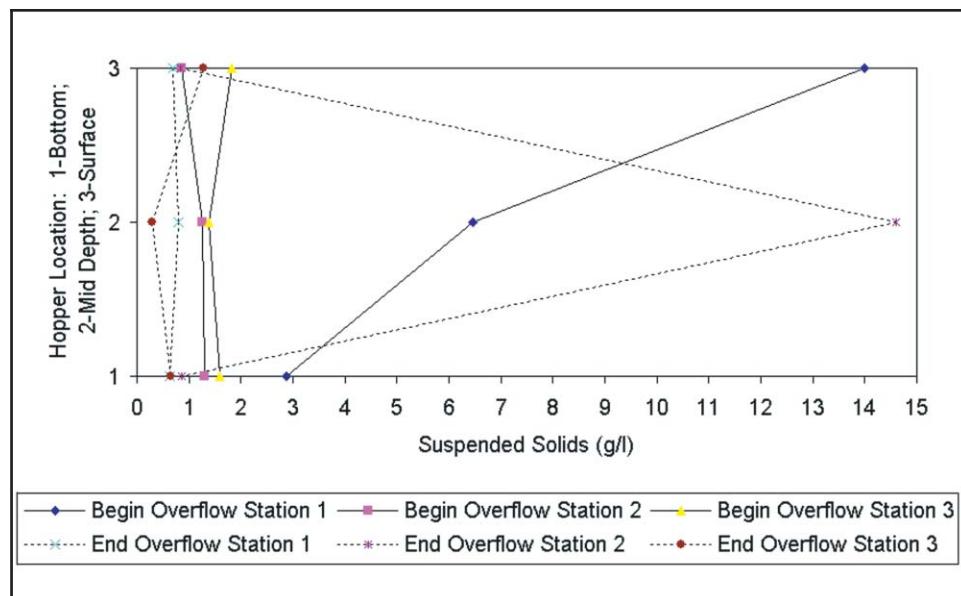


Figure 9. Hopper contents—solids concentrations of coarse-grained material

Fine-grained site

Suspended solids concentrations in the hopper at the fine-grained site were upward of 150 g/l at the bottom and approximately 80 g/l at the surface (Figure 10). It is expected that high concentrations of suspended solids would be found in the water column as the hopper agitates the fine-grained material and keeps it in suspension. The high concentrations of suspended solids at the surface indicate that a large amount of the material was lost to overflow in the fine-grained site.

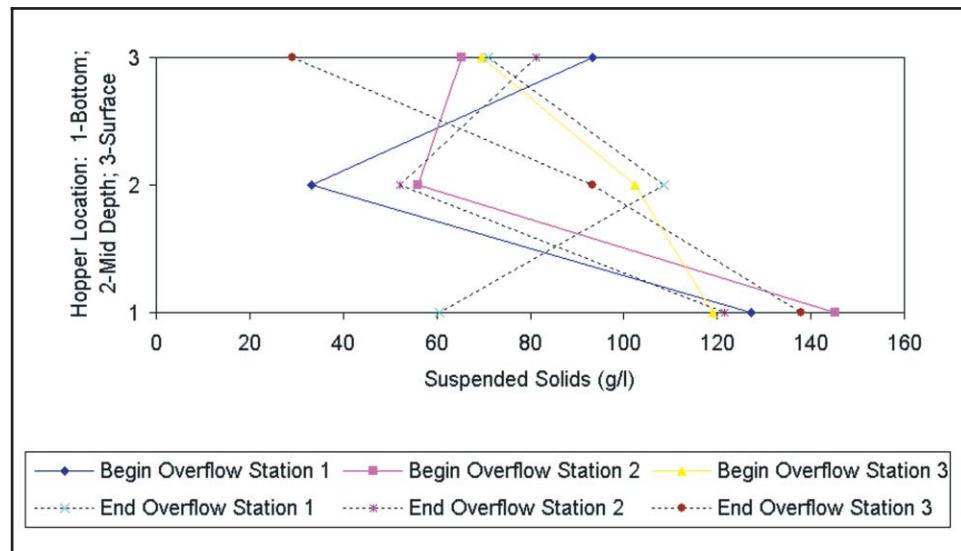


Figure 10. Hopper contents—solids concentrations of fine-grained material

Hopper Overflow

Coarse-grained site

Samples collected for grain-size distribution at the hopper overflow at the coarse-grained site averaged 81.1 percent sand with a range from 24.4 to 96.1 percent (Figure 11). Composites of five samples were obtained and the average grain-size distribution was 78.1 percent with a range from 66.7 to 87.7 percent (Figure 12). This shows that a large amount of the sandy material was being agitated in the hopper and being washed out during overflow. This is consistent with the loading data that show a loading of about 112.4 m³/min (147 yd³/min) before overflow and an average loading of about 22.9 m³/min (30 yd³/min) over the 57-min period during overflow. However, the rate of loading in the initial stages of overflow was likely much higher with the material in the overflow increasing as the hopper filled and retention time was decreased. None of the chemistry parameters analyzed in the overflow samples collected at the coarse-grained site exceeded marine acute objectives as listed in the Delaware River Basin Water Quality Regulations for dissolved criteria limits. Although the background value for copper (13 µg/l) exceeded the criteria (5.3 µg/l), the dissolved value for copper in the overflow was 5 µg/l, indicating a scavenging of metals by the suspended material during the dredging and overflow process.

Fine-grained site

Samples collected for grain-size distribution at the hopper overflow at the fine-grained site averaged 12.2 percent sand with a range from 6.2 to 31.2 percent (Figure 13). Composites of five samples were obtained and the average grain-size distribution was 10.6 percent with a range from 9.3 to 11.6 percent (Figure 14). The suspended solids concentrations in the overflow averaged 110 g/l over the total overflow period of 21 min. The solids concentrations were essentially consistent throughout the overflow period, indicating little retention of the fine material in the hopper once overflow began. A large amount of material, about 59.4 m³/min (78 yd³/min) or about 89 percent of the inflow is being lost to overflow. Zinc (131 µg/l) and endrin (0.0754 µg/l) were the only two chemical parameters measured in the overflow that exceeded the more stringent acute objectives of the freshwater and marine stream quality standards (95 µg/l for zinc and 0.019 µg/l for endrin) as listed in the Delaware River Basin Water Quality Regulations for dissolved criteria limits. The value for endrin exceeded standards by a factor of 4, indicating that both water quality objectives could be met a short distance from the point of overflow. None of the other chemistry parameters analyzed in the overflow samples collected at the fine-grained site exceeded the acute objectives.

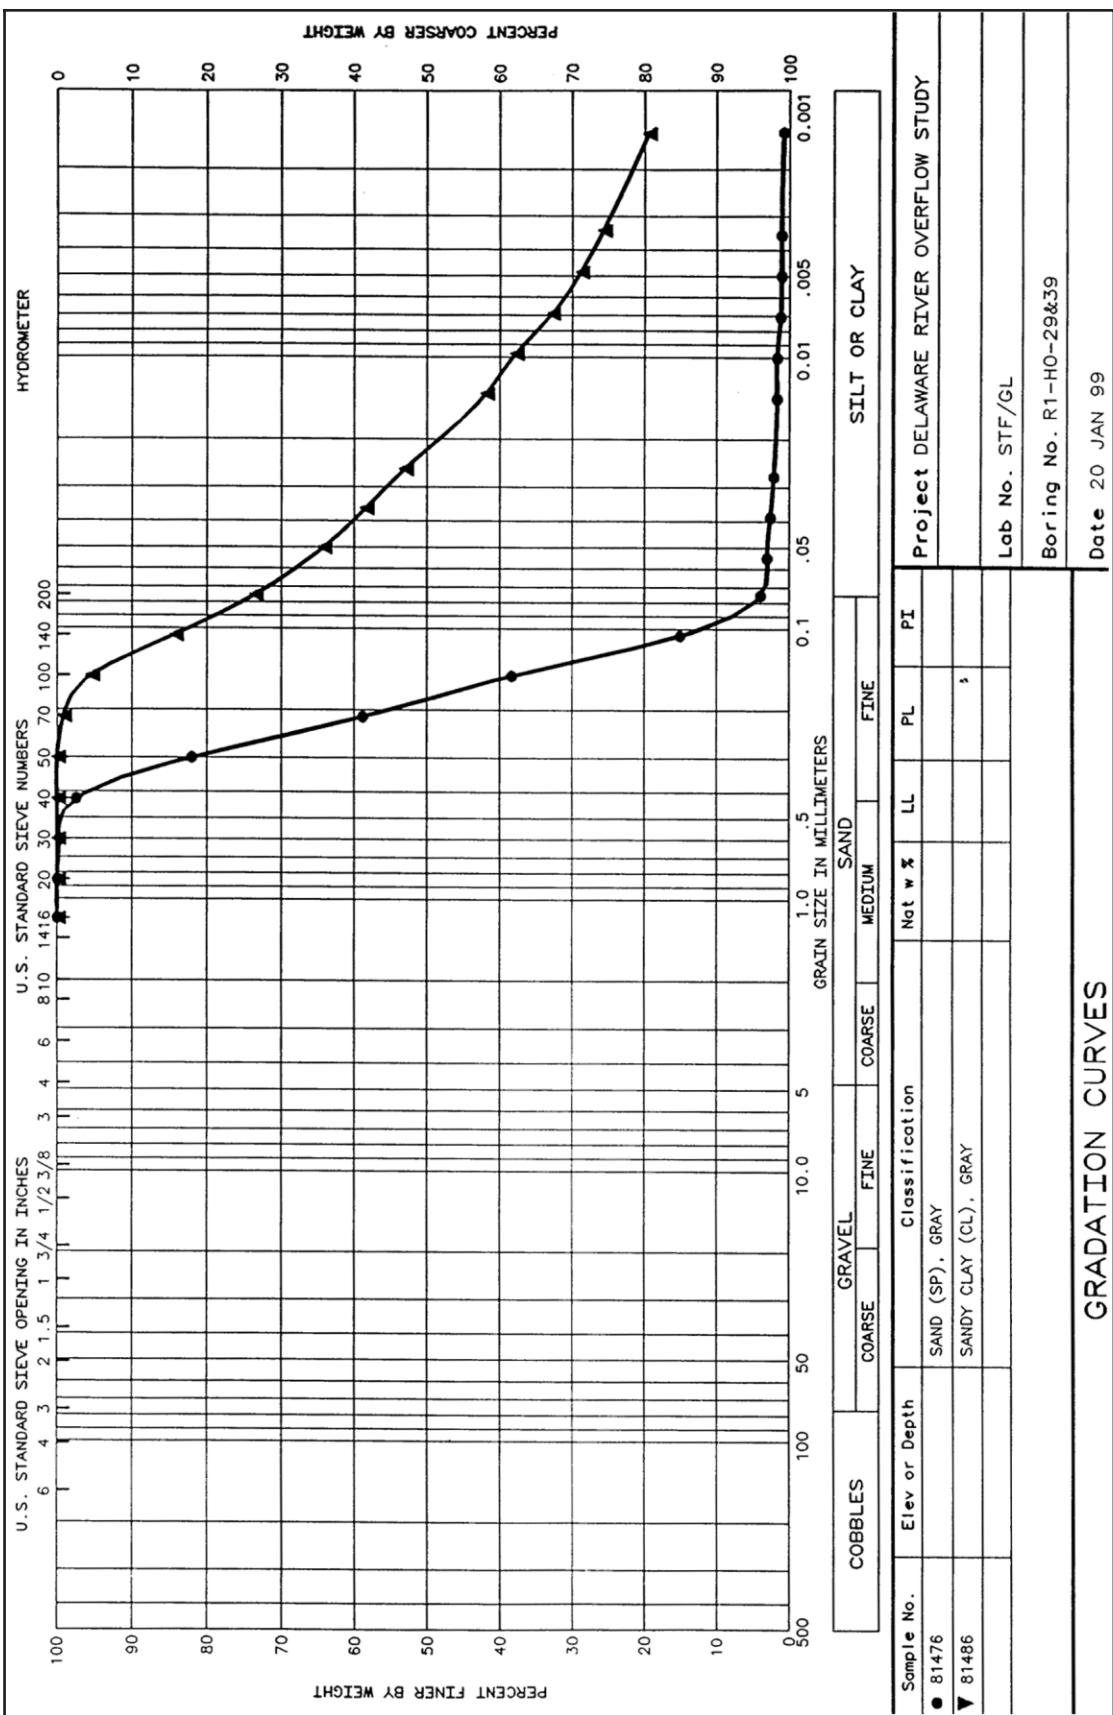


Figure 11. Range of gradation curves from hopper overflow at the coarse-grained site

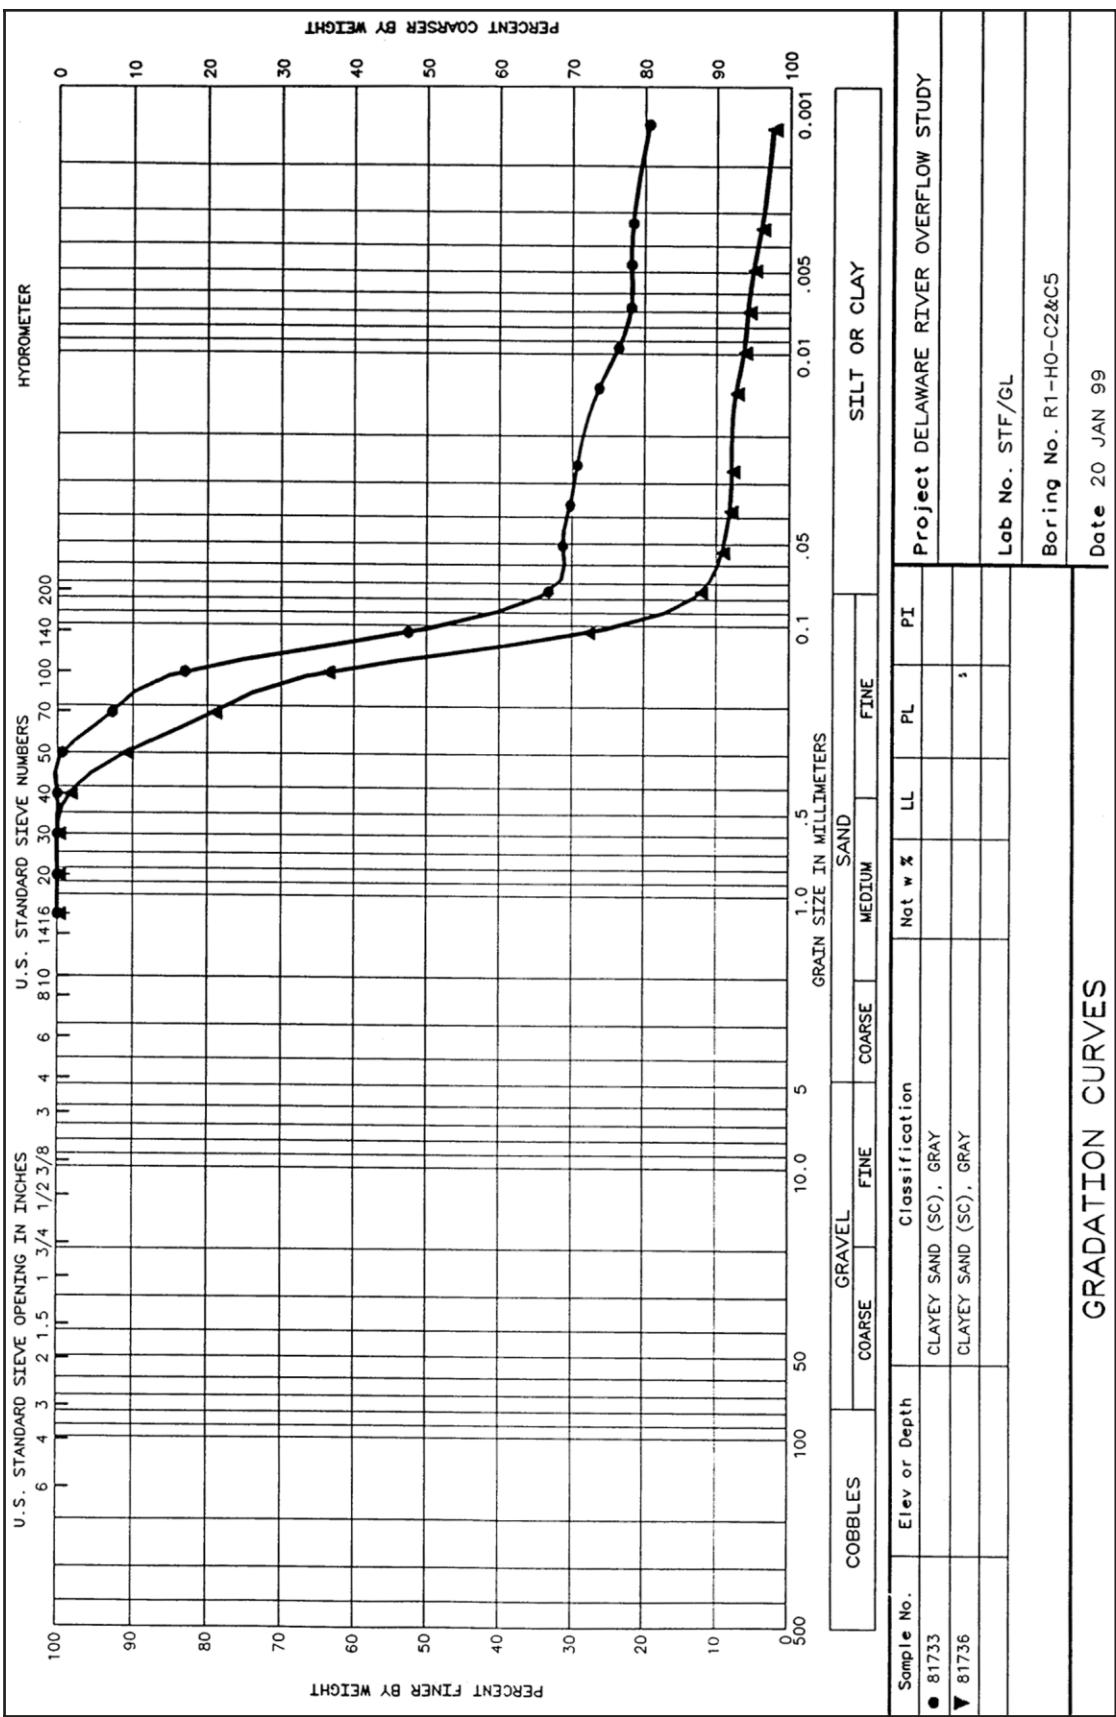


Figure 12. Range of gradation curves from hopper overflow composites at the coarse-grained site

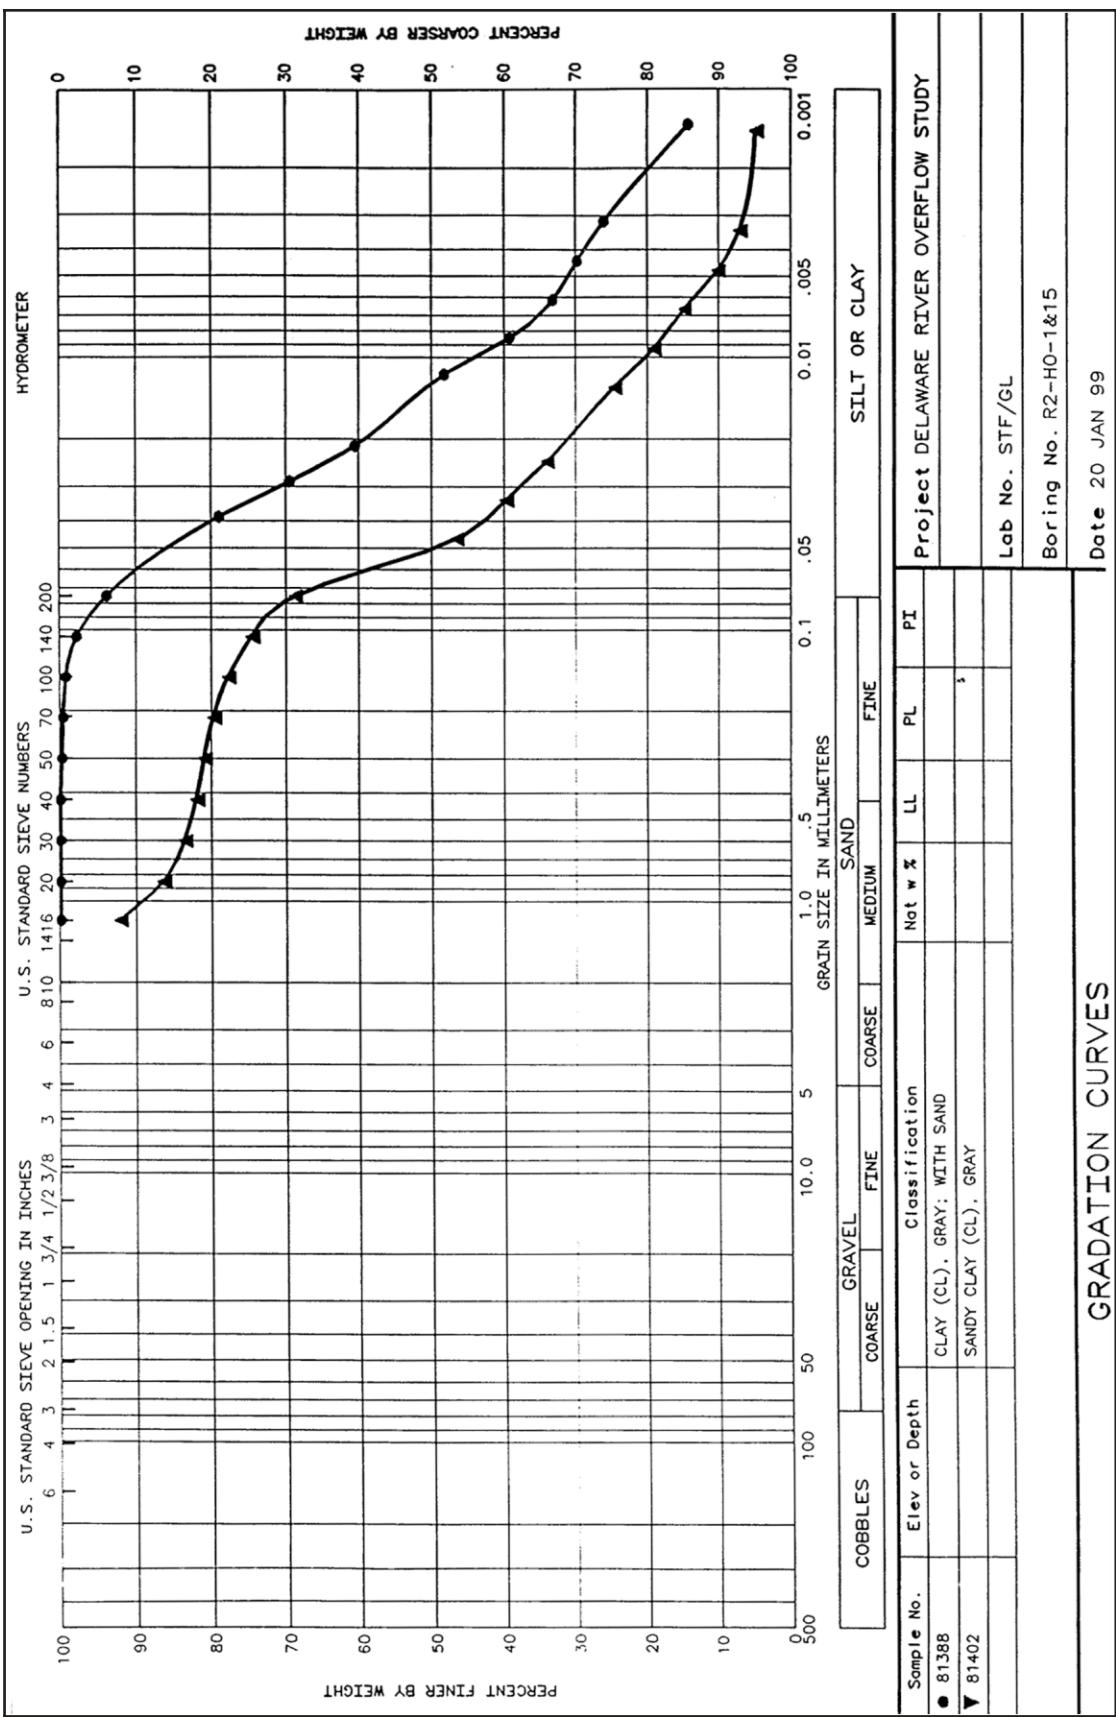


Figure 13. Range of gradation curves from hopper overflow at the fine-grained site

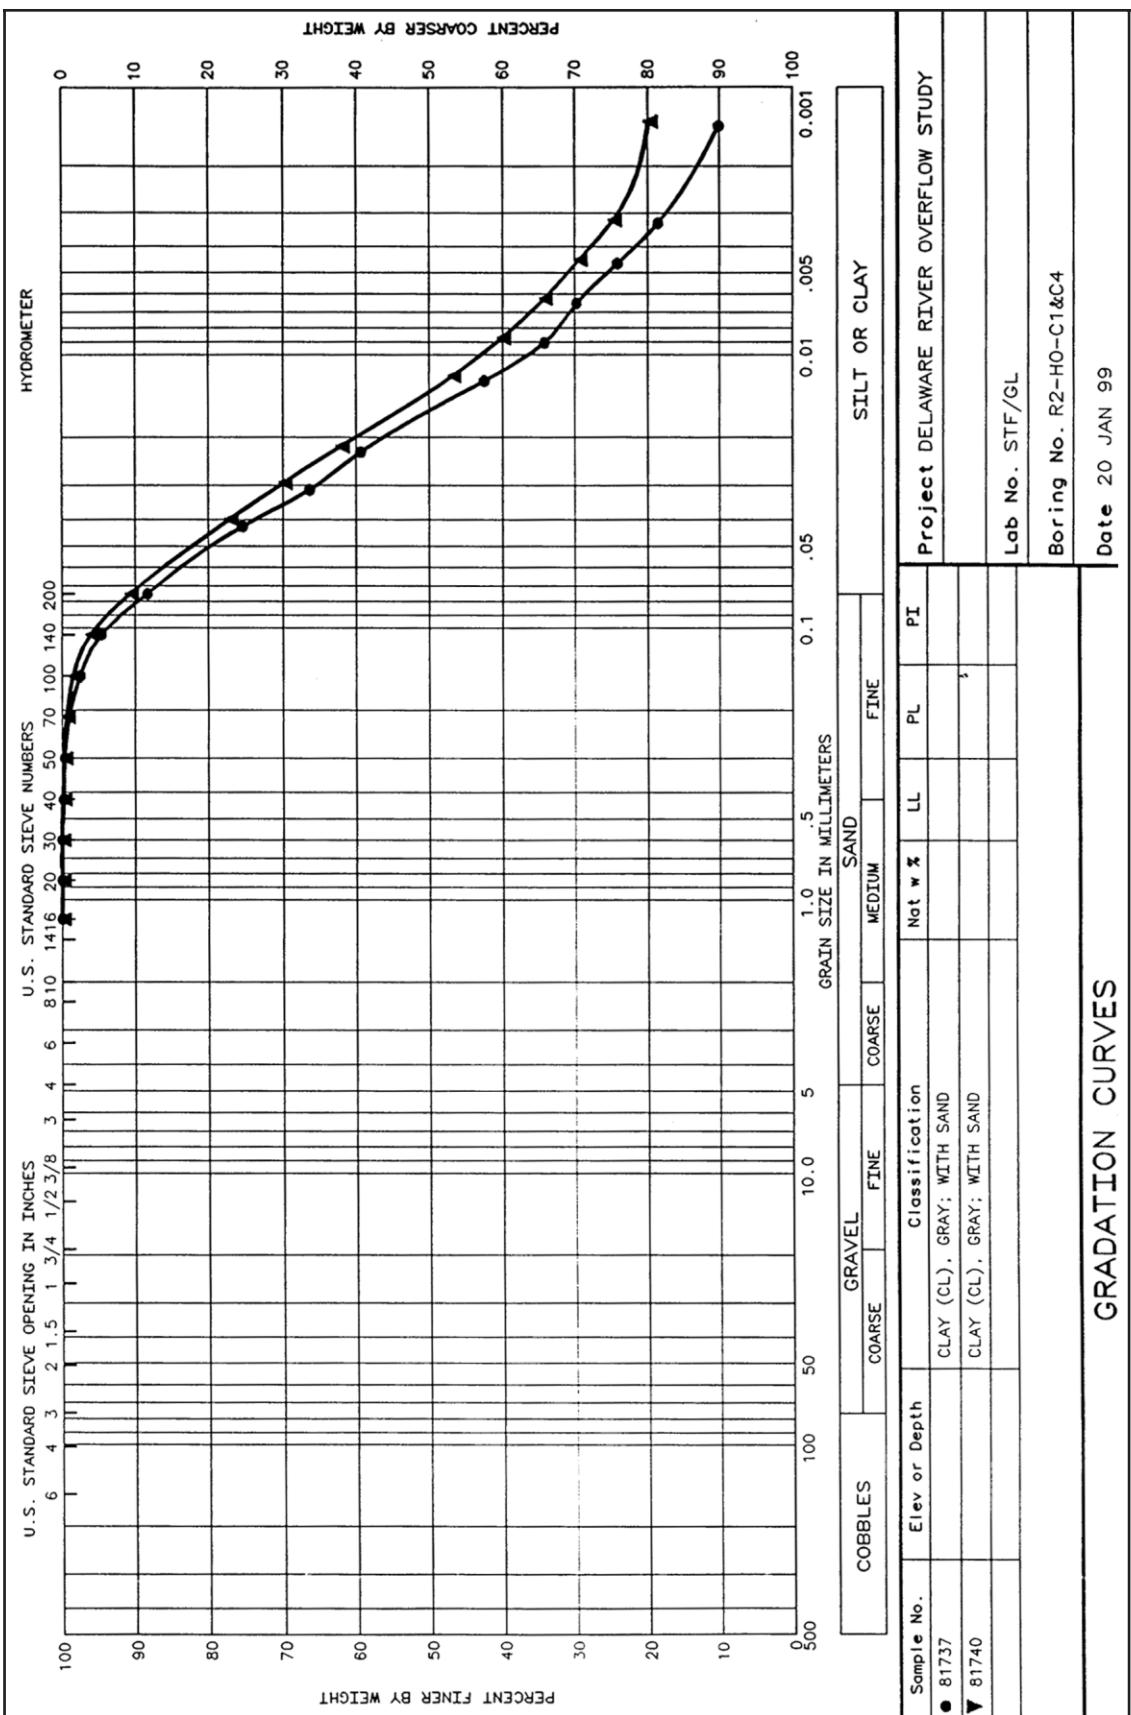


Figure 14. Range of gradation curves from hopper overflow composites at the fine-grained site

Plume Monitoring

Monitoring of the sediment plumes was accomplished using a boat-mounted 1,200-kHz Broad-Band Acoustic Doppler Current Profiler (ADCP). The instrument collects velocity vectors in the water column together with backscatter levels to determine the position and relative intensity of the sediment plume. Along with the ADCP, a MicroLite recording instrument with an Optical Backscatterance (OBS) Sensor was towed by the vessel at a depth of 15 ft. The MicroLite recorded data at 0.5-sec intervals. Navigation data for monitoring were obtained by a Starlink differential Global Positioning System (GPS). The GPS monitors the boat position from the starting and ending points along each transect.

Coarse-grained site

Transects were monitored in each test area to obtain the background levels of suspended materials prior to dredging activities. A period of 8 min following the dredge passing during nonoverflow dredging shows the level of suspended material to be returning to background levels. No lateral dispersion of the plume out of the channel was observed during the nonoverflow dredging operation.

During overflow dredging, a wider transect was performed to determine the lateral extent of the plume. No significant change above background levels could be detected. At 1-hr elapsed time following the end of the overflow dredging operation, the levels of suspended material returned to background conditions. Again, no lateral dispersion of the plume out of the channel area was observed. A complete analysis of the plume study can be found in Appendix B.

Figure 15 is a surface profile of the solids concentrations measured during nonoverflow and overflow conditions. Both sets of data fall within the minimum and maximum range of the background solids concentrations measured prior to dredging. Figure 16 is a middepth profile of the solids concentrations. Because of the narrow range between the measured values of the minimum and maximum range, both the nonoverflow and the overflow measured solids concentrations were above the maximum range. Figure 17 is a bottom profile of the solids concentrations and can be described much like that of the surface profile in that both sets of data fall within the minimum and maximum range of the background solids concentrations. In all three instances, there is not a significant difference in the solids concentrations measured during nonoverflow and the solids concentrations measured during overflow. Figure 18 shows that all solids concentrations measured during nonoverflow and overflow fell within the total minimum and maximum range measured in the background prior to dredging.

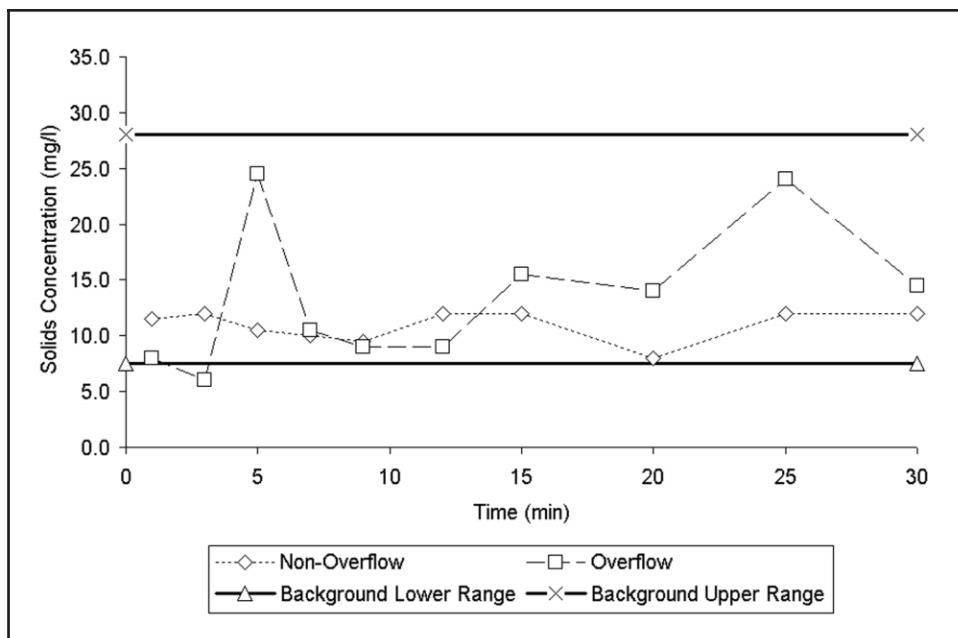


Figure 15. Plume solids concentrations at surface (coarse-grained material)

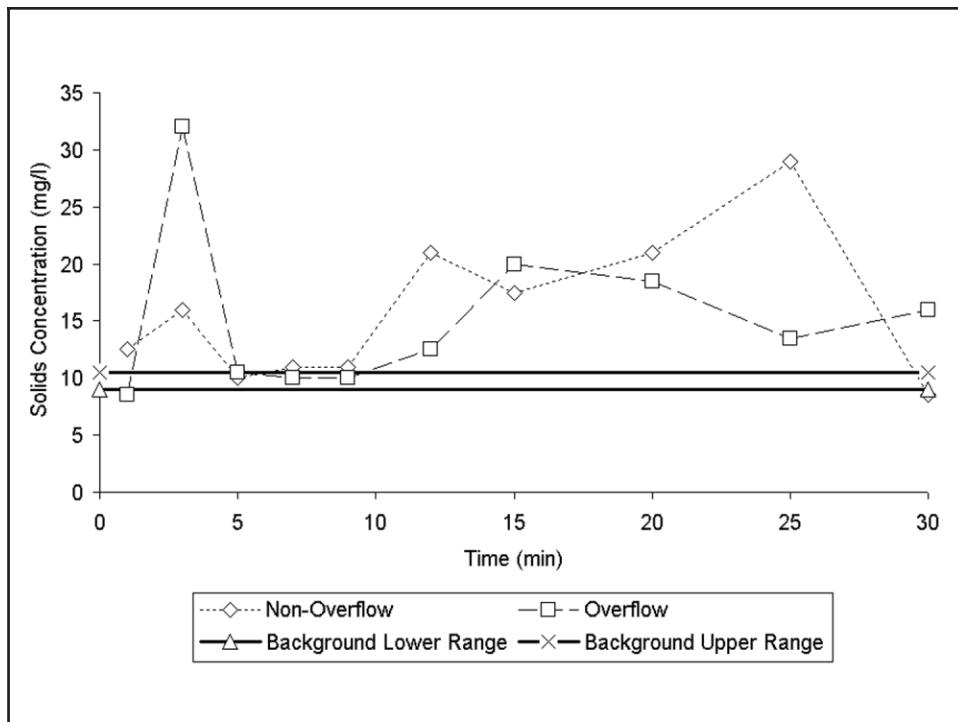


Figure 16. Plume solids concentrations at middepth (coarse-grained material)

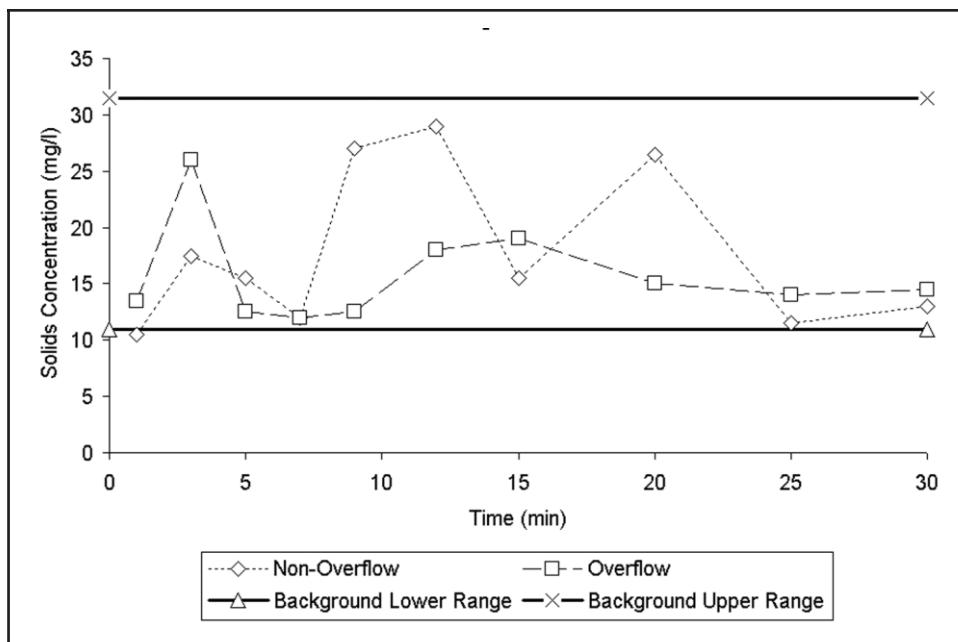


Figure 17. Plume solids concentrations at bottom (coarse-grained material)

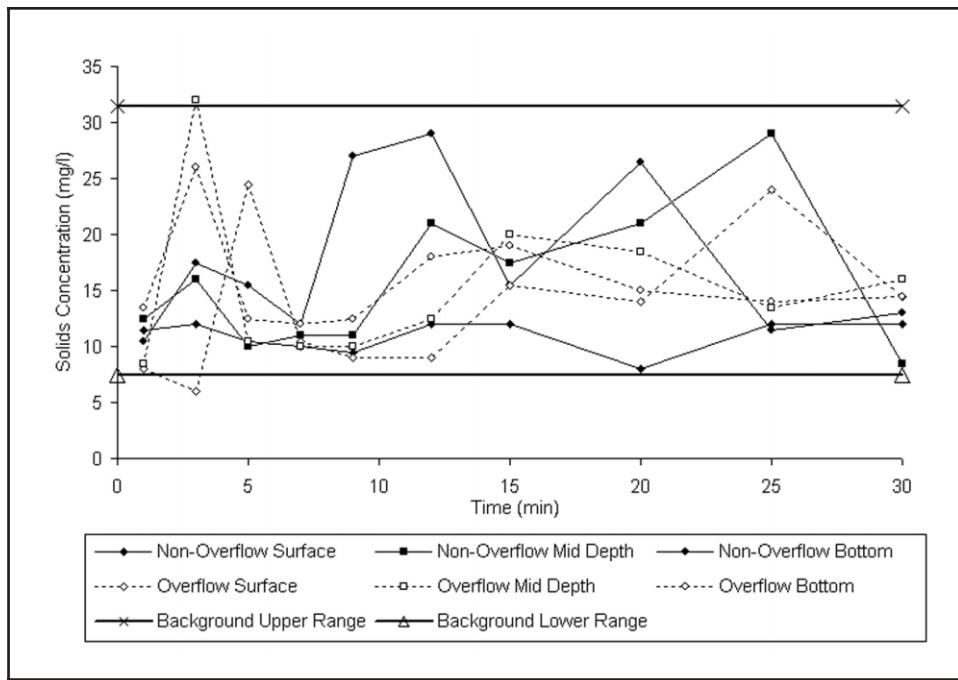


Figure 18. Plume solids concentrations at coarse-grained site

Fine-grained site

During the nonoverflow dredging operation, the tidal flow in the dredging area reversed from flood flow to ebb flow conditions. This accounts for the relative change in observed background levels taken before the non-overflow and overflow test dredging. At 19 min following the end of nonoverflow dredging, the levels of suspended material had returned to background conditions. Despite the change in direction of flow in the dredging area, no lateral movement of the plume beyond the channel limits was observed.

Immediately prior to overflow conditions, an increase in the background suspended material was observed. This increase is assumed to be the result of the increase in the ebb flow velocities and the resulting disturbance of bottom materials from near-bottom velocities and not dredge plume dispersion. When hopper overflow conditions began, the width of the transect was increased to observe the lateral extent of the dispersion of the dredge plume. After an elapsed time of 1 hr following the completion of the overflow dredging operation, levels of suspended materials had returned to background conditions. As in the previous dredge operations, no lateral dispersion of the dredge plume beyond the channel limits was observed. A complete analysis of the plume study can be found in Appendix B.

Figure 19 shows the solids concentrations as measured at the surface during nonoverflow and overflow conditions. The overflow solids concentrations oscillate outside the maximum background solids concentration. Toward the end of overflow, the concentrations fall back within the background range. Figure 20 shows the solids concentration as measured at middepth. The same pattern as the surface profile is exhibited. Figure 21 shows the solids concentration as measured at the bottom. The nonoverflow solids concentrations remain within the measured range of the background; however, the overflow solids concentrations remain above the maximum background range throughout the duration of overflow. Figure 22 shows the maximum background range of solids concentration measured. The nonoverflow solids measured are well within the total range while the overflow solids concentrations oscillate outside the maximum range. This is consistent since 70 percent or more of the material is fine-grained and would settle slowly.

Sedimentation Results

Coarse-grained site

Sediment profile images from a total of 14 stations were analyzed from the coarse-grained site as shown in Figure 2 of Appendix C. There was evidence that recent sedimentation had occurred at several of the stations

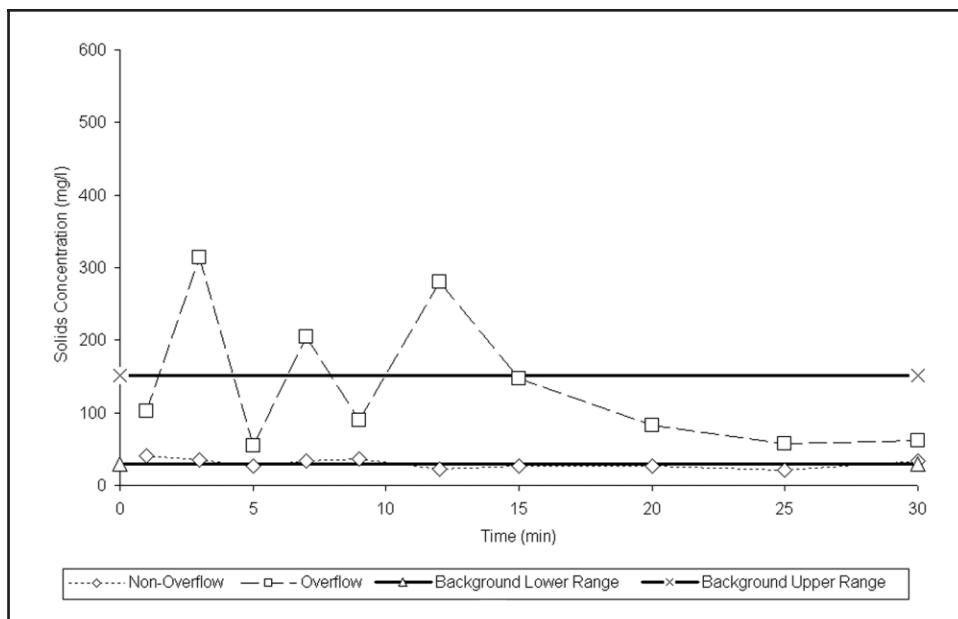


Figure 19. Plume solids concentrations at surface (fine-grained material)

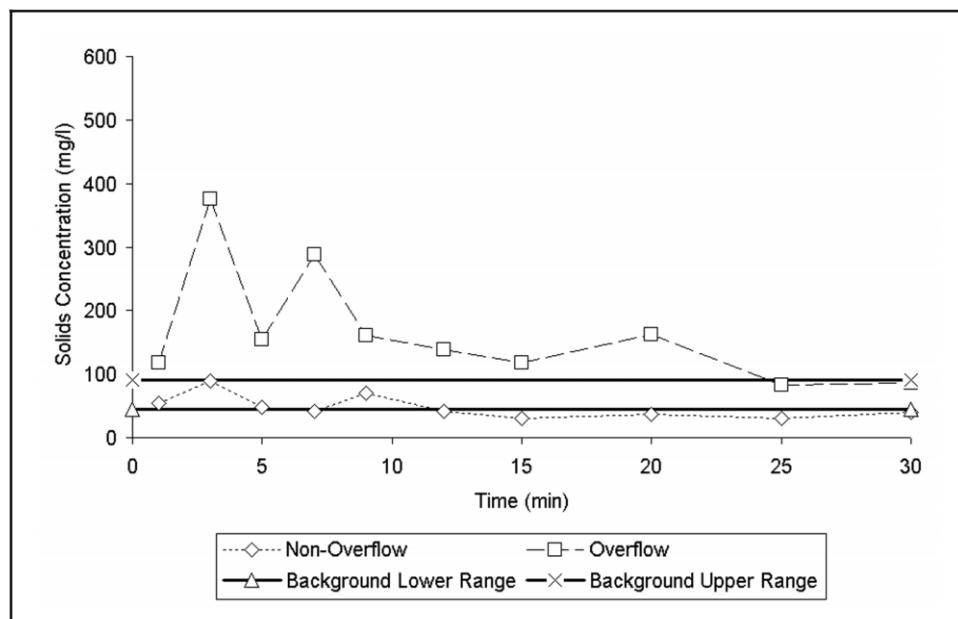


Figure 20. Plume solids concentrations at middepth (fine-grained material)

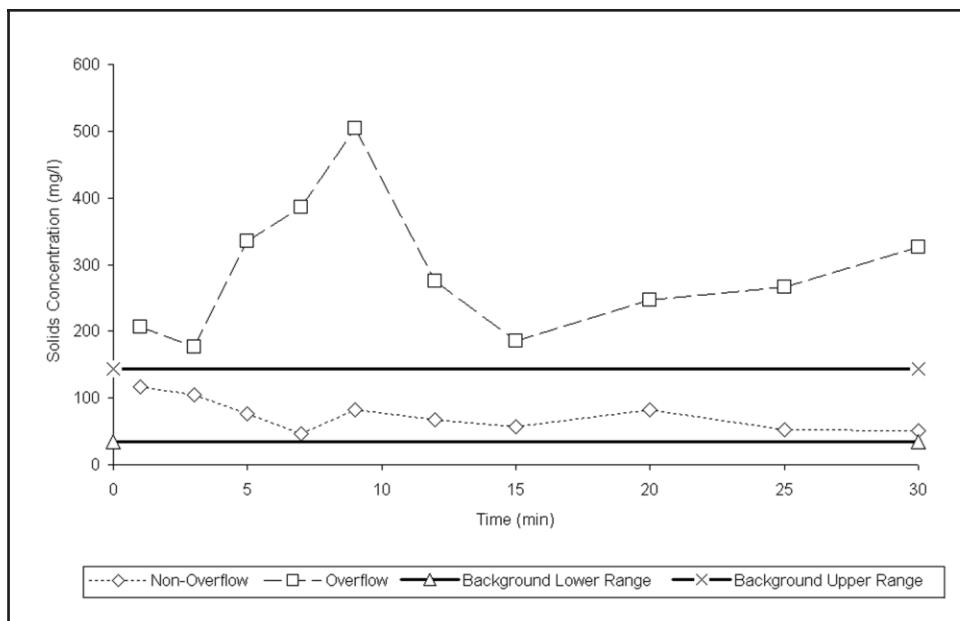


Figure 21. Plume solids concentrations at bottom (fine-grained material)

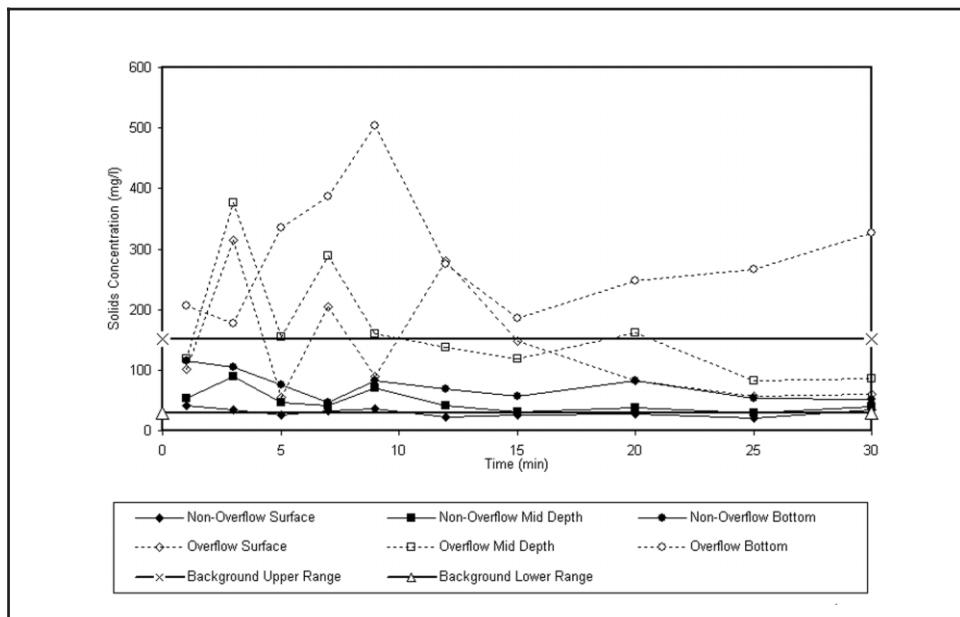


Figure 22. Plume solids concentrations of fine-grained material

within the channel, possibly a result of the dredging operations. Gray colored suspended material, indicative of hopper overflow material, was observed at two of the stations. Four of the stations had layering from grain-size changes but are assumed to have occurred because of normal sediment transport processes rather than hopper overflow operations.

Fine-grained site

Sediment profile images from a total of 41 stations were analyzed from the fine-grained site as shown in Figure 3 of Appendix C. No evidence of recent physical disturbance was detected at any of the stations, but material that could have come from the hopper overflow was observed at one station. Five of the stations on the edge of the channel had grain-size layering with sands on the surface overlaying clayey sediments. Since the sediments in the channel were finer silts and clays, it was unlikely that the layers at the channel edge stations were the result of the dredging operations. Three of the stations on the edge of the channel had sediment layering with amphipod and worm tubes which could not have reestablished living position in the short interval between dredging and sampling. Flocculent sediment layers, thin layers of unconsolidated surface sediments, occurred at six shoal stations and one channel edge station. Based on their color tones, all flock layers appeared to be composed of background sediments and not hopper overflow or dredged material.

No indication of newly deposited dredged material was observed at stations outside the edge of the navigation channel at either study site. Although the sampling station coverage was not extensive, given the relatively short duration of the tests, the risk of significant sedimentation as a consequence of the hopper dredging operations appears largely restricted to the bottom and side slopes of the channel. The full report on the sedimentation analysis is attached as Appendix C.

Standard Elutriate Tests

The standard elutriate analysis was performed using the composited in-situ sediment and site water. The purpose of the standard elutriate testing was to gain data on possible application of the test for prediction of overflow contaminant concentrations. The mean predicted dissolved values from the elutriates were calculated using the EFQUAL computer program, a module of the ADDAMS software package.¹ The elutriate test was conducted using standard procedures.²

¹ Palermo, M. R., and Schroder, P. R. (1991). "Documentation of the EFQUAL module for ADDAMS: Comparison of predicted effluent water quality with standards," Technical Note EEDP-06-13, U.S. Army Engineer Waterways Experiment Station, Vicksburg, MS

² U.S. Environmental Protection Agency and U.S. Army Corps of Engineers. (1998). "Evaluation of dredged material proposed for discharge in inland and near-coastal waters - Testing manual," EPA-823-B-98-004, U.S. Environmental Protection Agency, Washington, DC.

Coarse-grained site

At the coarse-grained site, background dissolved copper was the only contaminant of concern that was predicted to be above the standard (Table 2). The program predicted that copper would be discharged at 7 µg/l which is above the marine objective acute criteria but well below the background value of 13 µg/l. Therefore, a dilution of the background with respect to copper would naturally occur as a result of the dredging operation, and a mixing zone would not be required. The actual value recorded at the hopper overflow (effluent) for copper was 5 µg/l, which was below both the background and the standard of 5.3 µg/l.

Fine-grained site

At the fine-grained site, the predicted dissolved value of selenium was 24.3 µg/l (Table 3). The more stringent acute value of the freshwater or marine stream quality standard for selenium is 20 µg/l and the background was 19 µg/l. The actual value recorded at the hopper overflow for selenium was 14.2 µg/l, which is below the criteria and the background value, which would indicate a natural dilution of the contaminant of concern during dredging operations. Again, because of this natural dilution, a mixing zone would not be required.

At both reaches, the predicted elutriate values appear somewhat conservative when compared with the overflow values. The close agreement of the elutriate values with the actual overflow values (Tables 2 and 3) indicate that the elutriate test can be used as a valid predictor of overflow quality for the Delaware River. Summaries of the standard elutriate and predicted effluent quality results for the two sites can be found in Tables 2 and 3. A complete listing of the water quality, sediment, and elutriate analysis for both sites can be found in Appendix A.

Technical Findings of a 96-hr Water Column Bioassay

This test was performed to determine the possible biological effects of water column exposure to Delaware River overflow. Two species were used in performing the bioassays, the mysid shrimp, a crustacean species, *Mysidopsis bahia*, and the inland silverside, a fish species, *Menidia beryllina*. These species were selected based on conversations with personnel from the Delaware Department of Natural Resources and Environmental Control. The filtered elutriate was diluted with standard laboratory control seawater (6-ppt salinity for the fine-grained site and 30-ppt salinity for the coarse-grained site) to yield the following concentrations: 0-, 6.25-, 12.5-, 25-, 50-, and 100-percent elutriate. Each treatment was replicated five

Table 3
Delaware River Fine-Grained Site, Summary of Sediment and Water Quality Data

PARAMETER	Effluent Suspended Solids Concentration - mg/1	SEDIMENT CONC mg/kg	DETECTION LIMIT µg/1	WATER QUALITY STANDARDS ¹ µg/1	BACKGROUND CONC µg/1	ELUTRIATE CONC µg/1	OVERFLOW CONC µg/1
2-METHYLNAPHTHALENE	77385.000	0.034	0.3000	NL	BD	BD	BD
A-BHC		0.000	0.0500	NL	BD	BD	BD
A-ENDOSULFAN		0.003	0.0500	NL	BD	BD	BD
ACENAPHTHENE		0.000	0.3000	NL	BD	BD	BD
ACENAPHTHYLENE		0.000	0.3000	NL	BD	BD	BD
ALDRIN		0.000	0.0500	0.65	BD	BD	BD
ALUMINUM (Al)	3367.000	25.0000	750	BD	136.0000	BD	BD
ANTHRAZENE		0.033	0.3000	NL	BD	BD	BD
ANTIMONY		0.410	3.0000	NL	BD	BD	BD
ARSENIC (As)	10.400	2.0000	69	7.0000	10.0000	9	9
B-BHC		0.001	0.0500	NL	BD	BD	BD
B-ENDOSULFAN		0.000	0.1000	NL	BD	BD	BD
BARIUM (Ba)	52.200	2.0000	NL	223.0000	234.3333	674	674
BENZO (a) ANTHRACENE	0.100	0.3000	NL	BD	BD	BD	BD
BENZO (G, H, I) PERYLENE	0.067	0.3000	NL	BD	BD	BD	BD
BENZO (a) PYRENE	0.091	0.3000	NL	BD	BD	BD	BD
BENZO (b) FLUORANTHENE	0.079	0.3000	NL	BD	BD	BD	BD
BENZO (k) FLORANTHENE	0.089	0.3000	NL	BD	BD	BD	BD
BERYLLIUM (Be)	0.900	1.0000	NL	BD	BD	BD	BD
CADMIUM (Cd)	0.297	0.2000	34	BD	BD	BD	BD
CALCIUM (Ca)	2223.000	200.0000	NL	70200.000	66500.000	117000	117000
CHROMIUM (TRI) (Cr)	41.500	2.0000	8340	BD	BD	BD	BD
CHRYSENE	0.120	0.3000	NL	BD	BD	BD	BD
COBALT (Co)	11.100	2.0000	NL	BD	2.3333	5	5
COPPER (Cu)	16.400	1.0000	5.3	4.0000	2.3333	BD	BD
D-BHC	0.000	0.0500	NL	BD	BD	BD	BD
DIBENZO (A, H) ANTHRACENE	0.008	0.3000	NL	BD	BD	BD	BD
DIELDRIN	0.000	0.1000	0.355	BD	BD	BD	BD
ENDOSULFAN SULFATE	0.006	0.1000	NL	BD	BD	BD	BD
ENDRIN	0.000	0.1000	0.019	BD	BD	0.0754	0.0754
ENDRIN ALDEHYDE	0.000	0.1000	NL	BD	BD	BD	BD
FLUORANTHENE	0.150	0.3000	NL	BD	BD	BD	BD
FLUORENE	0.015	0.3000	NL	BD	BD	BD	BD
G-BHC	0.000	0.0500	0.08	BD	BD	BD	BD

Table 3 (Continued)

PARAMETER	SEDIMENT CONC mg/kg	DETECTION LIMIT µg/l	WATER QUALITY STANDARDS ¹ µg/l	BACKGROUND CONC µg/l	ELUTRIATE CONC µg/l	OVERFLOW CONC µg/l
HEPTACHLOR	0.001	0.0250	0.027	BD	0.0263	BD
HEPTACHLOR EPOXIDE	0.000	0.0500	NL	BD	BD	BD
INDENO(1, 2, 3-c, D) PYRENE	0.078	0.3000	NL	BD	BD	BD
IRON (Fe)	25567.000	20.0000	NL	40.6667	5964	
LEAD (Pb)	32.900	1.0000	48	4.500	BD	12
MAGNESIUM (Mg)	5080.000	200.0000	NL	180000.000	147666.672	142000
MANGANESE (Mn)	1107.000	1.0000	NL	2.000	8230.000	7932
MERCURY (Hg)	0.157	0.2000	2.1	BD	BD	BD
METHIOXYCHLOR	0.000	0.0500	NL	BD	BD	BD
NAPHTHALENE	0.060	0.3000	NL	BD	BD	BD
NICKEL (Ni)	21.800	1.0000	75	1.0000	2.3333	5
TOTAL PCB'S						
PCB 101	0.001	0.0010	NL	0.0011	0.0011	0.0010
PCB 105	0.000	0.0010	NL	BD	BD	BD
PCB 110	0.001	0.0010	NL	BD	BD	0.0010
PCB 114	0.000	0.0010	NL	BD	BD	BD
PCB 118	0.001	0.0010	NL	BD	BD	BD
PCB 119	0.000	0.0010	NL	BD	BD	BD
PCB 120	0.000	0.0010	NL	BD	BD	BD
PCB 121	0.000	0.0010	NL	BD	BD	BD
PCB 123	0.000	0.0010	NL	BD	BD	BD
PCB 126	0.000	0.0010	NL	BD	BD	BD
PCB 127	0.000	0.0010	NL	BD	BD	BD
PCB 128	0.000	0.0010	NL	BD	BD	BD
PCB 132	0.000	0.0010	NL	BD	BD	BD
PCB 135	0.000	0.0010	NL	BD	BD	BD
PCB 136	0.000	0.0010	NL	BD	BD	BD
PCB 137	0.000	0.0010	NL	BD	BD	BD
PCB 138	0.000	0.0010	NL	BD	BD	BD
PCB 141	0.000	0.0010	NL	BD	BD	BD
PCB 146	0.000	0.0010	NL	BD	BD	BD
PCB 149	0.001	0.0010	NL	BD	BD	BD
PCB 151	0.000	0.0010	NL	BD	BD	BD
PCB 153	0.001	0.0010	NL	BD	BD	BD
PCB 156	0.000	0.0010	NL	BD	BD	BD
PCB 157	0.000	0.0010	NL	BD	BD	BD
PCB 158	0.000	0.0010	NL	BD	BD	BD
PCB 166	0.000	0.0010	NL	BD	BD	BD
PCB 167	0.000	0.0010	NL	BD	BD	BD
PCB 168	0.000	0.0010	NL	BD	0.0011	BD

(Page 2 of 4)

Table 3 (Continued)

PARAMETER	SEDIMENT CONC mg/kg	DETECTION LIMIT µg/l	WATER QUALITY STANDARDS ¹ µg/l	BACKGROUND CONC µg/l	ELUTRIATE CONC µg/l	OVERFLOW CONC µg/l
PCB 169	0.000	0.0010	NL	BD	BD	BD
PCB 170	0.000	0.0010	NL	BD	BD	BD
PCB 171	0.000	0.0010	NL	BD	BD	BD
PCB 174	0.000	0.0010	NL	BD	BD	BD
PCB 177	0.000	0.0010	NL	BD	BD	BD
PCB 178	0.000	0.0010	NL	BD	BD	BD
PCB 179	0.000	0.0010	NL	BD	BD	BD
PCB 18	0.000	0.0010	NL	BD	BD	BD
PCB 180	0.002	0.0010	NL	BD	BD	BD
PCB 182	0.000	0.0010	NL	BD	BD	BD
PCB 183	0.000	0.0010	NL	BD	BD	BD
PCB 185	0.000	0.0010	NL	BD	BD	BD
PCB 187	0.000	0.0010	NL	BD	BD	BD
PCB 189	0.000	0.0010	NL	BD	BD	BD
PCB 190	0.000	0.0010	NL	BD	BD	BD
PCB 191	0.000	0.0010	NL	BD	BD	BD
PCB 194	0.000	0.0010	NL	BD	BD	BD
PCB 195	0.000	0.0010	NL	BD	BD	BD
PCB 196	0.000	0.0010	NL	BD	BD	BD
PCB 198	0.000	0.0010	NL	BD	BD	BD
PCB 200	0.000	0.0010	NL	BD	BD	BD
PCB 201	0.000	0.0010	NL	BD	BD	BD
PCB 203	0.001	0.0010	NL	BD	BD	BD
PCB 205	0.000	0.0010	NL	BD	BD	BD
PCB 206	0.003	0.0010	NL	BD	BD	BD
PCB 207	0.000	0.0010	NL	BD	BD	BD
PCB 208	0.002	0.0010	NL	0.0013	BD	BD
PCB 22	0.000	0.0010	NL	BD	BD	BD
PCB 28	0.000	0.0010	NL	BD	BD	BD
PCB 31	0.000	0.0010	NL	0.0017	BD	0.0027
PCB 33	0.000	0.0010	NL	BD	BD	BD
PCB 37	0.000	0.0010	NL	BD	BD	BD
PCB 40	0.000	0.0010	NL	BD	BD	BD
PCB 42	0.000	0.0010	NL	BD	BD	BD
PCB 44	0.000	0.0010	NL	BD	BD	BD
PCB 47	0.000	0.0010	NL	BD	BD	BD
PCB 49	0.001	0.0010	NL	BD	BD	BD
PCB 52	0.002	0.0010	NL	0.0010	0.0010	0.0010
PCB 60	0.001	0.0010	NL	BD	BD	BD

(Page 3 of 4)

Table 3 (Concluded)

PARAMETER	SEDIMENT CONC mg/kg	DETECTION LIMIT µg/l	WATER QUALITY STANDARDS ¹ µg/l	BACKGROUND CONC µg/l	ELUTRIATE CONC µg/l	OVERFLOW CONC µg/l
PCB 64	0.000	0.0010	NL	BD	BD	BD
PCB 66	0.000	0.0010	NL	BD	BD	BD
PCB 70	0.002	0.0010	NL	BD	0.0014	BD
PCB 74	0.000	0.0010	NL	BD	BD	BD
PCB 77	0.000	0.0010	NL	BD	BD	BD
PCB 8	0.000	0.0010	NL	BD	BD	BD
PCB 80	0.000	0.0010	NL	BD	BD	BD
PCB 81	0.000	0.0010	NL	BD	BD	BD
PCB 82	0.000	0.0010	NL	BD	BD	BD
PCB 84	0.000	0.0010	NL	BD	BD	BD
PCB 86	0.000	0.0010	NL	BD	BD	BD
PCB 87	0.000	0.0010	NL	BD	BD	BD
PCB 91	0.000	0.0010	NL	BD	BD	BD
PCB 92	0.000	0.0010	NL	BD	BD	BD
PCB 95	0.000	0.0010	NL	BD	0.0010	0.0017
PCB 97	0.000	0.0010	NL	BD	BD	BD
PCB 99	0.001	0.0010	NL	BD	BD	BD
PHENANTHRENE	0.085	0.3000	NL	BD	BD	BD
POTASSIUM (K)	2340.000	200.0000	NL	56400.000	39066.6680	322220
PPDDD	0.011	0.1000	NL	BD	BD	BD
PPDDE	0.008	0.1000	NL	BD	BD	BD
PPDDT	0.010	0.1000	NL	BD	BD	BD
PYRENE	0.164	0.3000	NL	BD	BD	BD
SELENIUM (Se)	1.630	2.0000	20	19.000	24.3333	14
SILVER (Ag)	0.683	1.0000	2.3	BD	1.3333	1
THALLIUM (Tl)	0.000	2.0000	NL	BD	BD	BD
TOC-TOTAL ORGANIC CARBON	7603.000	3000.0000	BD	BD	BD	BD
TOXAPHENE	0.000	0.0500	0.21	BD	BD	BD
VANADIUM (V)	37.800	2.0000	NL	4.0000	6.6667	BD
ZINC	131.000	10.0000	95	53.0000	74.6667	131
a-CHLORDANE	0.001	0.0500	0.045	BD	BD	BD
b-CHLORDANE	0.004	0.0500	0.045	BD	BD	BD

¹More stringent acute value of the freshwater or marine stream quality objectives.

BD = below detection

NL = not listed

0.0 = below detection for sediment conc. (mg/kg)

times. The trimmed Spearman-Karber method was used to calculate LC₅₀ values. The bioassay report is attached as Appendix D.

Coarse-grained site

Survival in test concentrations from the coarse-grained site ranged from 100 to 88 percent for *Mysidopsis bahia* and from 88 to 68 percent for *Menidia beryllina*. Exposures in elutriate test concentrations from the coarse-grained site did not adversely affect survival of either test species. Since neither test species had mortality values greater than 50 percent, an LC₅₀ value could not be calculated.

Fine-grained site

Survival in test concentrations from the fine-grained site ranged from 90 to 0 percent with 0-percent survival in the 50- and 100-percent exposures for *Mysidopsis bahia*. Survival for *Menidia beryllina* ranged from 98 to 0 percent with 4- to 0-percent survival in the 50- and 100-percent elutriate treatments. An LC₅₀ value of 30.04 percent was calculated for *Mysidopsis bahia* and an LC₅₀ value of 31.66 percent was calculated for *Menidia beryllina*. Mortality observed from exposures in elutriate test concentrations was attributed to the high level of NH₃. In the short term, high levels of NH₃ are common in predominately fine-grained sites during dredging operations.

4 Summary and Conclusions

Based on the results of the study, the following conclusions can be made:

- a. Loading data at the coarse-grained site shows a gain of 130 percent over a period of 57 min after overflow began. Based on the round-trip travel time required to the disposal site and the amount of material retained in the hopper, rates of return greater than 50 percent may be realized for the coarse-grained material. Loading data at the fine-grained site show a gain of 18 percent over a period of 21 min after overflow began. Based on the round-trip travel time required to the pump-out site and the amount of material retained in the hopper, there was no economic benefit to overflow for the fine-grained material. In both instances, rates of return are also based on the assumption that all material in the overflow will return to the channel and will require redredging.
- b. Using the same economic assumptions as discussed above, about a 20-percent return may be realized from a material containing about 60 percent sand and about a 40-percent return may be realized from a material containing about 80 percent sand.
- c. Based on the water chemistry analysis at the two sites, no contaminants of concern caused a problem because of the dredging operation. None of the contaminants of concern exceeded water quality objectives in the overflow at the coarse-grained site. At the coarse-grained site, only dissolved copper was above the standard in the background. Samples taken for dissolved copper at the hopper overflow, however, were within standards. This indicates a scavenging of the metal by the suspended material occurred during the dredging and overflow process. At the fine-grained site, only zinc and endrin were measured at the overflow to be above the standard. However, the predicted elutriate for both zinc and endrin were measured at below detection levels.
- d. The plume study results showed that the coarse-grained material settled quite rapidly and that no lateral dispersion of the plume out of the channel was observed. No significant change above background levels could be detected. At 1 hr elapsed time following

the end of the overflow dredging operation, the levels of suspended material had returned to background conditions. At the fine-grained site, an increase in the suspended material was observed. However, after an elapsed time of 1 hr following the completion of the overflow dredging operation, levels of suspended materials had returned to background conditions. Again, no lateral dispersion of the dredge plume beyond the channel limits was observed.

- e. The sedimentation portion of the study confirmed what was observed during the plume study. At the coarse-grained site, there was evidence that recent sedimentation had occurred at several of the stations, possibly a result of dredging operations. But no indication of newly deposited dredged material was observed at stations outside the edge of the navigation channel. At the fine-grained site, some sediment layering was found even though no evidence of recent physical disturbance was detected at any of the stations. Again, no indication of newly deposited dredged material was observed at stations outside the edge of the navigation channel.
- f. Although the sampling station coverage was not extensive, the risk of significant sedimentation as a consequence of the hopper dredging operations appears to be restricted to the bottom and side slopes of the channel.
- g. The elutriate test results were consistent with and slightly conservative as compared to the overflow samples, indicating that the elutriate test is a valid prediction of overflow quality for the Delaware system.
- h. The bioassay analysis showed no adverse effects to exposures of fish and crustaceans species being exposed to the elutriate samples from the coarse-grained site. Some species mortality were observed using elutriates from the fine-grained site, but was determined to be caused from high levels of NH_3 , which is a common short-term by-product of dredging in fine-grained material.
- i. The overall results of the study indicate that overflow meets the applicable water quality objectives and has no measurable physical impact outside the navigation channels. The loading data indicate that overflow in coarse-grained reaches results in significant load gains, while load gains in fine-grained reaches are small. Based on these results, overflow in coarse-grained reaches should be considered for future operations.

Appendix A

Delaware River Sediment and Water Quality Analysis

Delaware River Sediment and Water Quality Analysis (Coarse and Fine-Grained Sites)

Metscoar	- Metals (Coarse-Grained Site)
PAHscoar	- PAH's (Coarse-Grained Site)
Pestcoar	- Pesticides (Coarse-Grained Site)
PCBscoar	- PCB's (Coarse-Grained Site)
Tsscoar	- Total Suspended Solids (Coarse-Grained Site)
Nutcoar	- Nutrients (Coarse-Grained Site)
Spgrcoar	- Specific Gravity and %Moisture (Coarse-Grained Site)
Metsfine	- Metals (Fine-Grained Site)
PAHsfine	- PAH's (Fine-Grained Site)
Pestfine	- Pesticides (Fine-Grained Site)
PCBsfine	- PCB's (Fine-Grained Site)
Tssfine	- Total Suspended Solids (Fine-Grained Site)
Nutfine	- Nutrients (Fine-Grained Site)
Spgrfine	- Specific Gravity and % Moisture (Fine-Grained Site)

Metscoar										
Delaware River Water Analysis (Coarse-Grained Site)										
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	SB	AS	BE	CD	CR	CU	PB	HG
		Detection Limit (mg/l)	0.003	0.002	0.002	0.0002	0.002	0.001	0.001	0.00020
Water	80827	Plume Monitoring								
Water	80735	Background, dissolved	0.003	0.044	0.002	0.0002	0.002	0.013	0.001	0.00020
Water	80735	Background, total	0.003	0.044	0.001	0.0002	0.002	0.012	0.003	0.00020
Water	80828	0-10 min, overflow, dissolved	0.003	0.044	0.002	0.0002	0.002	0.011	0.001	0.00020
Water	80829	10-20 min, overflow, dissolved	0.003	0.044	0.002	0.0002	0.002	0.010	0.001	0.00020
Water	80830	20-30 min, overflow, dissolved	0.003	0.046	0.002	0.0002	0.002	0.013	0.001	0.00020
Water	80736	0-10 min, overflow, total	0.006	0.045	0.001	0.0002	0.002	0.011	0.001	0.00020
Water	80737	10-20 min, overflow, total	0.003	0.046	0.001	0.0002	0.002	0.012	0.001	0.00020
Water	80738	20-30 min, overflow, total	0.003	0.045	0.001	0.0002	0.002	0.011	0.001	0.00020
Water	80831	0-10 min, non-overflow, dissolved	0.003	0.047	0.002	0.0002	0.002	0.012	0.001	0.00020
Water	80832	10-20 min, non-overflow, dissolved	0.003	0.048	0.002	0.0004	0.002	0.011	0.001	0.00020
Water	80833	20-30 min, non-overflow, dissolved	0.003	0.047	0.002	0.0002	0.002	0.012	0.001	0.00020
Water	80739	0-10 min, non-overflow, total	0.003	0.044	0.001	0.0002	0.002	0.011	0.002	0.00020
Water	80740	10-20 min, non-overflow, total	0.003	0.048	0.001	0.0002	0.002	0.011	0.001	0.00020
Water	80741	20-30 min, non-overflow, total	0.003	0.044	0.001	0.0002	0.002	0.010	0.001	0.00020
		Hopper Inflow Monitoring								
Water	80780	3& 6 min, dissolved	0.003	0.051	0.001	0.0002	0.002	0.007	0.001	0.00020
Water	80781	9&12 min, dissolved	0.003	0.045	0.001	0.0002	0.002	0.005	0.001	0.00020
Water	80782	15&18 min, dissolved	0.003	0.046	0.001	0.0002	0.002	0.006	0.001	0.00020
Water	80783	21&24 min, dissolved	0.003	0.048	0.001	0.0002	0.002	0.007	0.001	0.00020
Water	80784	27&30 min, dissolved	0.003	0.050	0.001	0.0002	0.002	0.006	0.001	0.00020
Water	80668	3& 6 min, total	0.003	0.076	0.002	0.0029	0.088	0.090	0.168	0.00083
Water	80669	9&12 min, total	0.003	0.070	0.002	0.0010	0.088	0.062	0.140	0.00064
Water	80670	15&18 min, total	0.003	0.069	0.002	0.0005	0.140	0.094	0.132	0.00129
Water	80671	21&24 min, total	0.003	0.105	0.007	0.0008	0.332	0.127	0.292	0.00369
Water	80672	27&30 min, total	0.003	0.115	0.008	0.0009	0.392	0.158	0.208	0.00126
		Hopper Overflow Monitoring								
Water	80785	2& 4 min, dissolved	0.003	0.045	0.001	0.0002	0.002	0.005	0.001	0.00020
Water	80786	6& 8 min, dissolved	0.003	0.048	0.001	0.0002	0.002	0.005	0.001	0.00020
Water	80787	10&12 min, dissolved	0.003	0.047	0.001	0.0002	0.002	0.005	0.001	0.00020
Water	80788	14&16 min, dissolved	0.003	0.046	0.001	0.0002	0.002	0.005	0.001	0.00020
Water	80789	18&20 min, dissolved	0.003	0.045	0.001	0.0002	0.002	0.005	0.001	0.00020
Water	80674	2& 4 min, total	0.006	0.047	0.001	0.0027	0.059	0.031	0.080	0.00053
Water	80675	6& 8 min, total	0.003	0.052	0.002	0.0017	0.074	0.030	0.104	0.00113
Water	80676	10&12 min, total	0.003	0.066	0.002	0.0013	0.080	0.035	0.114	0.00086
Water	80677	14&16 min, total	0.007	0.052	0.001	0.0034	0.040	0.028	0.049	0.00056
Water	80678	18&20 min, total	0.003	0.046	0.001	0.0002	0.048	0.018	0.040	0.00048
		Site Water								
Water	81648	Sample 1 Total	0.003	0.034	0.001	0.0002	0.005	0.027	0.003	0.00020
Water	81649	Sample 2 Total	0.003	0.037	0.001	0.0002	0.002	0.021	0.002	0.00020
Water	81650	Sample 3 Total	0.003	0.037	0.001	0.0002	0.002	0.016	0.001	0.00020
		Elutriate								
Water	81654	Sample 1 Dissolved	0.003	0.050	0.001	0.0002	0.002	0.005	0.001	0.00020
Water	81655	Sample 2 Dissolved	0.003	0.052	0.001	0.0002	0.002	0.006	0.001	0.00020
Water	81656	Sample 3 Dissolved	0.003	0.047	0.001	0.0002	0.002	0.010	0.001	0.00020
Water	81651	Sample 1 Total	0.003	0.040	0.001	0.0002	0.002	0.006	0.002	0.00020
Water	81652	Sample 2 Total	0.003	0.042	0.001	0.0002	0.002	0.005	0.001	0.00020
Water	81653	Sample 3 Total	0.003	0.043	0.001	0.0002	0.002	0.005	0.001	0.00020
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	SB	AS	BE	CD	CR	CU	PB	HG
		Detection Limit (mg/kg)	0.30	0.20	0.1	0.020	0.2	0.10	1.0	0.020
		In situ Sediment								
Sediment	81726	Sample #1	0.30	3.50	0.1	0.020	5.6	3.00	12.9	0.084
Sediment	81727	Sample #2	0.30	2.90	0.2	0.020	6.3	1.30	12.1	0.110
Sediment	81728	Sample #3	0.30	3.10	0.2	0.020	7.0	2.70	12.0	0.084
SB - Antimony	AS - Arsenic	BE - Beryllium	CD - Cadmium	CR - Chromium	CU - Copper	PB - Lead	HG - Mercury			
Values below less than values are estimated results. Results are less than the reporting limit.										

Metscoar

Delaware River Water Analysis (Coarse-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	NI	SE	AG	TL	ZN	AL	BA	CA
		Detection Limit (mg/l)	0.001	0.002	0.001	0.002	0.010	0.025	0.002	0.200
		Plume Monitoring								
Water	80827	Background, dissolved	0.009	0.152	0.001	0.002	0.010	0.025	0.039	323
Water	80735	Background, total	0.009	0.138	0.003	0.002	0.017	0.644	0.016	254
Water	80828	0-10 min, overflow, dissolved	0.008	0.150	0.001	0.002	0.010	0.025	0.042	334
Water	80829	10-20 min, overflow, dissolved	0.008	0.146	0.001	0.002	0.010	0.025	0.061	369
Water	80830	20-30 min, overflow, dissolved	0.012	0.158	0.001	0.002	0.011	0.025	0.077	331
Water	80736	0-10 min, overflow, total	0.010	0.157	0.004	0.002	0.015	0.864	0.016	253
Water	80737	10-20 min, overflow, total	0.010	0.153	0.004	0.002	0.017	0.984	0.016	261
Water	80738	20-30 min, overflow, total	0.008	0.157	0.003	0.002	0.013	0.676	0.016	260
Water	80831	0-10 min, non-overflow, dissolved	0.009	0.158	0.001	0.002	0.010	0.025	0.038	319
Water	80832	10-20 min, non-overflow, dissolved	0.009	0.160	0.001	0.002	0.010	0.025	0.062	314
Water	80833	20-30 min, non-overflow, dissolved	0.008	0.153	0.001	0.002	0.010	0.025	0.043	319
Water	80739	0-10 min, non-overflow, total	0.007	0.149	0.003	0.002	0.010	0.716	0.016	243
Water	80740	10-20 min, non-overflow, total	0.009	0.163	0.003	0.002	0.017	1.100	0.016	242
Water	80741	20-30 min, non-overflow, total	0.008	0.154	0.003	0.002	0.012	0.664	0.016	247
		Hopper Inflow Monitoring								
Water	80780	3& 6 min, dissolved	0.010	0.175	0.001	0.002	0.038	0.025	0.209	374
Water	80781	9&12 min, dissolved	0.008	0.149	0.001	0.002	0.025	0.025	0.100	329
Water	80782	15&18 min, dissolved	0.009	0.161	0.001	0.002	0.034	0.025	0.152	342
Water	80783	21&24 min, dissolved	0.009	0.163	0.001	0.002	0.043	0.025	0.139	360
Water	80784	27&30 min, dissolved	0.009	0.167	0.001	0.002	0.048	0.107	0.207	393
Water	80668	3 & 6 min, total	0.076	0.069	0.006	0.002	1.120	32.6	0.157	1610
Water	80669	9&12 min, total	0.060	0.062	0.012	0.002	0.728	29.9	0.090	648
Water	80670	15&18 min, total	0.072	0.103	0.014	0.002	0.366	52.4	0.147	460
Water	80671	21&24 min, total	0.152	0.113	0.015	0.002	1.100	120.0	0.223	1120
Water	80672	27&30 min, total	0.184	0.129	0.019	0.002	0.719	147.0	0.316	1020
		Hopper Overflow Monitoring								
Water	80785	2& 4 min, dissolved	0.008	0.155	0.001	0.002	0.038	0.025	0.148	345
Water	80786	6& 8 min, dissolved	0.009	0.165	0.001	0.002	0.028	0.025	0.108	347
Water	80787	10&12 min, dissolved	0.009	0.166	0.001	0.002	0.042	0.025	0.166	361
Water	80788	14&16 min, dissolved	0.009	0.162	0.001	0.002	0.015	0.025	0.080	376
Water	80789	18&20 min, dissolved	0.008	0.153	0.003	0.002	0.012	0.025	0.084	319
Water	80674	2& 4 min, total	0.044	0.053	0.007	0.002	0.330	20.9	0.088	480
Water	80675	6& 8 min, total	0.048	0.064	0.006	0.002	0.399	25.2	0.090	460
Water	80676	10&12 min, total	0.050	0.089	0.006	0.002	0.609	25.8	0.077	476
Water	80677	14&16 min, total	0.035	0.113	0.054	0.002	0.155	18.6	0.066	380
Water	80678	18&20 min, total	0.026	0.118	0.011	0.002	0.118	18.2	0.060	345
		Site Water								
Water	81648	Sample 1 Total	0.005	0.115	0.003	0.002	0.012	1.260	0.015	322
Water	81649	Sample 2 Total	0.008	0.124	0.005	0.002	0.010	0.056	0.012	305
Water	81650	Sample 3 Total	0.004	0.134	0.004	0.002	0.010	0.064	0.012	307
		Elutriate								
Water	81654	Sample 1 Dissolved	0.005	0.172	0.001	0.002	0.022	0.025	0.073	318
Water	81655	Sample 2 Dissolved	0.005	0.170	0.001	0.002	0.031	0.025	0.097	318
Water	81656	Sample 3 Dissolved	0.005	0.161	0.001	0.002	0.031	0.025	0.105	314
Water	81651	Sample 1 Total	0.006	0.135	0.004	0.002	0.010	1.140	0.018	309
Water	81652	Sample 2 Total	0.005	0.140	0.003	0.002	0.010	1.140	0.018	304
Water	81653	Sample 3 Total	0.005	0.141	0.003	0.002	0.010	1.590	0.026	437
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	NI	SE	AG	TL	ZN	AL	BA	CA
		Detection Limit (mg/kg)	0.5	0.200	0.100	0.200	1.0	1	0.1	20
		Insitu Sediment								
Sediment	81726	Sample #1	3.2	0.800	0.100	0.200	29.9	1580	5.7	19600
Sediment	81727	Sample #2	3.3	0.900	0.400	0.200	29.0	1720	4.8	11600
Sediment	81728	Sample #3	3.5	0.899	0.499	0.200	28.7	1720	4.3	9820

NI - Nickel SE - Selenium AG - Silver TL - Thallium ZN - Zinc AL - Aluminum BA - Barium CA - Calcium
 BOLD - less than values
 Values below less than values are estimated results. Results are less than the reporting limit.

Metscoar								
Delaware River Water Analysis (Coarse-Grained Site)								
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	CO	FE	MG	MN	K	NA
		Detection Limit (mg/l)	0.002	0.020	0.200	0.001	0.200	0.200
Water	80827	Plume Monitoring Background, dissolved	0.001	0.020	961	0.006	284	9,540
Water	80735	Background, total	0.001	0.204	968	0.012	291	7,970
Water	80828	0-10 min, overflow, dissolved	0.001	0.020	994	0.002	294	8,280
Water	80829	10-20 min, overflow, dissolved	0.001	0.020	985	0.002	290	9,230
Water	80830	20-30 min, overflow, dissolved	0.001	0.020	1030	0.004	302	8,890
Water	80736	0-10 min, overflow, total	0.001	0.312	940	0.012	300	9,560
Water	80737	10-20 min, overflow, total	0.001	0.364	1030	0.015	368	8,580
Water	80738	20-30 min, overflow, total	0.001	0.184	944	0.009	324	7,880
Water	80831	0-10 min, non-overflow, dissolved	0.001	0.020	992	0.005	292	8,930
Water	80832	10-20 min, non-overflow, dissolved	0.001	0.020	986	0.006	288	8,510
Water	80833	20-30 min, non-overflow, dissolved	0.001	0.020	957	0.005	282	9,040
Water	80739	0-10 min, non-overflow, total	0.001	0.256	908	0.014	318	7,480
Water	80740	10-20 min, non-overflow, total	0.001	0.572	912	0.015	272	8,480
Water	80741	20-30 min, non-overflow, total	0.001	0.192	916	0.008	334	8,120
		Hopper Inflow Monitoring						
Water	80780	3& 6 min, dissolved	0.002	0.020	1003	0.011	308	10,900
Water	80781	9&12 min, dissolved	0.002	0.020	1007	0.002	306	8,950
Water	80782	15&18 min, dissolved	0.002	0.029	1023	0.002	310	9,110
Water	80783	21&24 min, dissolved	0.002	0.020	1052	0.002	317	10,200
Water	80784	27&30 min, dissolved	0.002	0.074	1035	0.099	315	9,150
Water	80668	3& 6 min, total	0.060	98.0	1050	3.770	316	8,400
Water	80669	9&12 min, total	0.042	31.3	1040	2.170	319	8,570
Water	80670	15&18 min, total	0.020	71.7	968	1.500	311	8,020
Water	80671	21&24 min, total	0.062	288.0	1090	4.440	338	8,530
Water	80672	27&30 min, total	0.056	218.0	1020	3.200	349	8,660
		Hopper Overflow Monitoring						
Water	80785	2& 4 min, dissolved	0.002	0.020	993	0.001	299	8,750
Water	80786	6& 8 min, dissolved	0.002	0.020	962	0.001	290	9,240
Water	80787	10&12 min, dissolved	0.002	0.020	999	0.001	302	8,750
Water	80788	14&16 min, dissolved	0.002	0.020	1,000	0.001	303	8,960
Water	80789	18&20 min, dissolved	0.002	0.020	990	0.001	294	8,870
Water	80674	2& 4 min, total	0.023	66.4	1,060	1.130	333	8,800
Water	80675	6& 8 min, total	0.026	70.4	1,060	1.470	335	9,170
Water	80676	10&12 min, total	0.034	92.0	968	1.420	308	7,980
Water	80677	14&16 min, total	0.015	29.8	1,000	0.608	309	8,640
Water	80678	18&20 min, total	0.009	28.2	984	0.544	310	9,170
		Site Water						
Water	81648	Sample 1 Total	0.002	0.837	998	0.028	306	8,370
Water	81649	Sample 2 Total	0.002	0.048	974	0.004	289	8,780
Water	81650	Sample 3 Total	0.002	0.039	968	0.005	289	8,980
		Elutriate						
Water	81654	Sample 1 Dissolved	0.002	0.020	1,020	0.002	303	8,820
Water	81655	Sample 2 Dissolved	0.002	0.020	1,030	0.001	304	9,250
Water	81656	Sample 3 Dissolved	0.002	0.020	1,030	0.002	304	9,040
Water	81651	Sample 1 Total	0.002	0.742	982	0.024	292	8,620
Water	81652	Sample 2 Total	0.002	0.632	991	0.019	294	8,760
Water	81653	Sample 3 Total	0.002	0.799	1,400	0.024	423	12,300
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	CO	FE	MG	MN	K	NA
		Detection Limit (mg/kg)	0.1	2	20	0.1	20	20
		In situ Sediment						
Sediment	81726	Sample #1	2.2	5,810	1,260	91.7	443	2180
Sediment	81727	Sample #2	2.4	6,040	1,330	95.2	474	1920
Sediment	81728	Sample #3	2.4	5,860	1,320	97.4	462	1900
		CO - Cobalt FE - Iron MG - Magnesium MN - Manganese K - Potassium NA - Sodium V - Vanadium						
		Values below less than values						
		Estimated results. Results are less than the reporting limit.						

PAHscoar

Delaware River Water Analysis (Coarse-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	NAPHTH	ACENAY	ACENAP	FLUORE	PHENAN	ANTRAC	FLANTHE
		Detection Limit (mg/l)	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80848	Plume Monitoring Background, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80763	Background, total	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80849	0-10 min, overflow, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80850	10-20 min, overflow, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80851	20-30 min, overflow, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80764	0-10 min, overflow, total	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80765	10-20 min, overflow, total	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80766	20-30 min, overflow, total	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80852	0-10 min, non-overflow, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80853	10-20 min, non-overflow, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80854	20-30 min, non-overflow, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80767	0-10 min, non-overflow, total	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80768	10-20 min, non-overflow, total	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80769	20-30 min, non-overflow, total	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80810	Hopper Inflow Monitoring 3& 6 min, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80811	9812 min, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80812	15818 min, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80813	21824 min, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80814	27830 min, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80716	3& 6 min, total	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80717	9812 min, total	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80718	15818 min, total	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00015
Water	80719	21824 min, total	0.0003	0.0003	0.0003	0.0003	0.00016	0.00030	0.00024
Water	80720	27&30 min, total	0.0003	0.0003	0.0003	0.0003	0.00012	0.00030	0.00019
Water	80815	Hopper Overflow Monitoring 2& 4 min, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80816	6& 8 min, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80817	10812 min, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80818	14816 min, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80819	18820 min, dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80722	2& 4 min, total	0.0006	0.0003	0.0003	0.0003	0.00030	0.00030	0.00014
Water	80723	6& 8 min, total	0.0006	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80724	10812 min, total	0.0006	0.0003	0.0003	0.0003	0.00073	0.00018	0.00075
Water	80725	14816 min, total	0.0006	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	80726	18820 min, total	0.0006	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	81630	Site Water Sample 1 Total	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	81631	Sample 2 Total	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	81632	Sample 3 Total	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	81636	Elutriate Sample 1 Dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	81637	Sample 2 Dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	81638	Sample 3 Dissolved	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	81633	Sample 1 Total	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	81634	Sample 2 Total	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
Water	81635	Sample 3 Total	0.0003	0.0003	0.0003	0.0003	0.00030	0.00030	0.00030
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	NAPHTH	ACENAY	ACENAP	FLUORE	PHENAN	ANTRAC	FLANTHE
		Detection Limit (mg/kg)	0.011	0.011	0.011	0.011	0.0110	0.011	0.0110
Sediment	81702	In situ Sediment Sample #1	0.011	0.011	0.011	0.011	0.0110	0.011	0.0110
Sediment	81703	Sample #2	0.011	0.011	0.011	0.011	0.0038	0.011	0.0267
Sediment	81704	Sample #3	0.011	0.011	0.011	0.011	0.0110	0.011	0.0042

NAPHTH - Naphthalene ACENAY - Acenaphthylene ACENAP - Acenaphthene FLUORE - Fluorene PHENAN - Phenanthrene
 ANTRAC - Anthracene FLANTHE - Fluoranthene
 BOLD - less than values

Values below less than values are estimated results. Results are less than the reporting limit.

PAHscoar									
Delaware River Water Analysis (Coarse-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PYRENE	CHRYSE	BAANTHR	BBFLANT	BKFLANT	BAPYRE	I123PYR
Detection Limit (mg/l)			0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80848	Plume Monitoring Background, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80763	Background, total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80849	0-10 min, overflow, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80850	10-20 min, overflow, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80851	20-30 min, overflow, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80764	0-10 min, overflow, total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80765	10-20 min, overflow, total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80766	20-30 min, overflow, total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80852	0-10 min, non-overflow, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80853	10-20 min, non-overflow, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80854	20-30 min, non-overflow, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80767	0-10 min, non-overflow, total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80768	10-20 min, non-overflow, total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80769	20-30 min, non-overflow, total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Hopper Inflow Monitoring									
Water	80810	3& 6 min, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80811	9&12 min, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80812	15&18 min, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80813	21&24 min, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80814	27&30 min, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80716	3& 6 min, total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80717	9&12 min, total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80718	15&18 min, total	0.00013	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80719	21&24 min, total	0.00019	0.00016	0.0003	0.00010	0.00012	0.00030	0.00030
Water	80720	27&30 min, total	0.00017	0.00012	0.0003	0.00010	0.00010	0.00030	0.00030
Hopper Overflow Monitoring									
Water	80815	2& 4 min, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80816	6& 8 min, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80817	10&12 min, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80818	14&16 min, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80819	18&20 min, dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80722	2& 4 min, total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80723	6& 8 min, total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80724	10&12 min, total	0.00062	0.00041	0.0030	0.00019	0.00028	0.00025	0.00019
Water	80725	14&16 min, total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	80726	18&20 min, total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Site Water									
Water	81630	Sample 1 Total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	81631	Sample 2 Total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	81632	Sample 3 Total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Elutriate									
Water	81636	Sample 1 Dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	81637	Sample 2 Dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	81638	Sample 3 Dissolved	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	81633	Sample 1 Total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	81634	Sample 2 Total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
Water	81635	Sample 3 Total	0.00030	0.00030	0.0003	0.00030	0.00030	0.00030	0.00030
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PYRENE	CHRYSE	BAANTHR	BBFLANT	BKFLANT	BAPYRE	I123PYR
Detection Limit (mg/kg)			0.0110	0.0110	0.0110	0.0110	0.0110	0.0110	0.0110
In situ Sediment									
Sediment	81702	Sample #1	0.0110	0.0110	0.0110	0.0110	0.0110	0.0110	0.0110
Sediment	81703	Sample #2	0.0332	0.0583	0.0514	0.0617	0.0671	0.0644	0.0621
Sediment	81704	Sample #3	0.0042	0.0110	0.0110	0.0110	0.0110	0.0110	0.0110
PYRENE - Pyrene		CHRYSE - Chrysene	BAANTHR - Benzo(a)Anthracene	BBFLANT - Benzo(b)Fluoranthene					
BKFLANT - Benzo(k)Fluoranthene		BAPYRE - Benzo(a)Pyrene	I123PYR - Indeno(1,2,3-C,D)Pyrene						
BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.									

PAHscoar

Delaware River Water Analysis (Coarse-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	DBAHANT	B-GHI-PY	2MeNAPH	2FIBP-S	PTERP-S
		Detection Limit (mg/l)	0.0003	0.00030	0.0003		
Water	80848	Plume Monitoring Background, dissolved	0.0003	0.00030	0.0003	89.8%	71.9%
Water	80763	Background, total	0.0003	0.00030	0.0003	95.4%	73.8%
Water	80849	0-10 min, overflow, dissolved	0.0003	0.00030	0.0003	88.8%	68.6%
Water	80850	10-20 min, overflow, dissolved	0.0003	0.00030	0.0003	91.2%	76.0%
Water	80851	20-30 min, overflow, dissolved	0.0003	0.00030	0.0003	89.0%	65.8%
Water	80764	0-10 min, overflow, total	0.0003	0.00030	0.0003	59.1%	76.3%
Water	80765	10-20 min, overflow, total	0.0003	0.00030	0.0003	36.6%	31.1%
Water	80766	20-30 min, overflow, total	0.0003	0.00030	0.0003	92.1%	71.0%
Water	80852	0-10 min, non-overflow, dissolved	0.0003	0.00030	0.0003	94.3%	74.7%
Water	80853	10-20 min, non-overflow, dissolved	0.0003	0.00030	0.0003	83.1%	65.0%
Water	80854	20-30 min, non-overflow, dissolved	0.0003	0.00030	0.0003	90.4%	69.1%
Water	80767	0-10 min, non-overflow, total	0.0003	0.00030	0.0003	36.5%	27.1%
Water	80768	10-20 min, non-overflow, total	0.0003	0.00030	0.0003	77.5%	69.9%
Water	80769	20-30 min, non-overflow, total	0.0003	0.00030	0.0003	73.2%	72.0%
Water	80810	Hopper Inflow Monitoring 3& 6 min, dissolved	0.0003	0.00030	0.0003	76.0%	67.4%
Water	80811	9&12 min, dissolved	0.0003	0.00030	0.0003	77.5%	69.2%
Water	80812	15&18 min, dissolved	0.0003	0.00030	0.0003	94.5%	76.8%
Water	80813	21&24 min, dissolved	0.0003	0.00030	0.0003	83.0%	63.8%
Water	80814	27&30 min, dissolved	0.0003	0.00030	0.0003	61.7%	54.8%
Water	80716	3& 6 min, total	0.0003	0.00030	0.0003	48.0%	60.3%
Water	80717	9&12 min, total	0.0003	0.00030	0.0003	60.0%	58.4%
Water	80718	15&18 min, total	0.0003	0.00030	0.0003	72.2%	66.1%
Water	80719	21&24 min, total	0.0003	0.00030	0.0003	67.0%	62.9%
Water	80720	27&30 min, total	0.0003	0.00030	0.0003	58.0%	66.6%
Water	80815	Hopper Overflow Monitoring 2& 4 min, dissolved	0.0003	0.00030	0.0003	63.0%	60.7%
Water	80816	6& 8 min, dissolved	0.0003	0.00030	0.0003	63.8%	84.8%
Water	80817	10&12 min, dissolved	0.0003	0.00030	0.0003	64.4%	67.7%
Water	80818	14&16 min, dissolved	0.0003	0.00030	0.0003	75.4%	81.3%
Water	80819	18&20 min, dissolved	0.0003	0.00030	0.0003	48.3%	65.8%
Water	80722	2& 4 min, total	0.0003	0.00030	0.0003	56.5%	69.7%
Water	80723	6& 8 min, total	0.0003	0.00030	0.0003	66.9%	70.5%
Water	80724	10&12 min, total	0.0003	0.00014	0.0003	60.8%	67.6%
Water	80725	14&16 min, total	0.0003	0.00030	0.0003	74.2%	65.0%
Water	80726	18&20 min, total	0.0003	0.00030	0.0003	57.7%	68.1%
Water	81630	Site Water Sample 1 Total	0.0003	0.00030	0.0003	39.7%	61.9%
Water	81631	Sample 2 Total	0.0003	0.00030	0.0003	61.3%	62.4%
Water	81632	Sample 3 Total	0.0003	0.00030	0.0003	68.0%	66.8%
Water	81636	Elutriate Sample 1 Dissolved	0.0003	0.00030	0.0003	55.8%	678.0%
Water	81637	Sample 2 Dissolved	0.0003	0.00030	0.0003	79.2%	56.1%
Water	81638	Sample 3 Dissolved	0.0003	0.00030	0.0003	63.3%	58.3%
Water	81633	Sample 1 Total	0.0003	0.00030	0.0003	65.9%	64.0%
Water	81634	Sample 2 Total	0.0003	0.00030	0.0003	37.7%	71.0%
Water	81635	Sample 3 Total	0.0003	0.00030	0.0003	53.8%	71.2%
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	DBAHANT	B-GHI-PY	2MeNAPH	2FIBP-S	PTERP-S
		Detection Limit (mg/kg)	0.0110	0.0110	0.011		
Sediment	81702	In situ Sediment Sample #1	0.0110	0.0110	0.011	62.7%	46.1%
Sediment	81703	Sample #2	0.0046	0.0514	0.011	76.0%	49.7%
Sediment	81704	Sample #3	0.0110	0.0110	0.011	68.8%	52.0%

DBAHANT - Dibenzo(A,H)Anthracene B-GHI-PY - Benzo(G,H,I)Perylene 2MeNAPH - 2-Methylnaphthalene

2FIBP-S - 2-Fluorobiphenyl(Surrogate (43-116 W)) PTERP-S - p-Terphenyl-D14(Surrogate (33-141 W))

BOLD - less than values

Values below less than values are estimated results. Results are less than the reporting limit.

Pestcoar								
Delaware River Water Analysis (Coarse-Grained Site)								
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	ALDRIN	A-BHC	B-BHC	G-BHC	D-BHC	PPDDD
		Detection Limit (mg/l)	0.000035	0.000035	0.000035	0.000035	0.000035	0.000070
		Plume Monitoring						
Water	80841	Background, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80756	Background, total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80842	0-10 min, overflow, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80843	10-20 min, overflow, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80844	20-30 min, overflow, dissolved	0.000024	0.000024	0.000024	0.000024	0.000024	0.000049
Water	80757	0-10 min, overflow, total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80758	10-20 min, overflow, total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80759	20-30 min, overflow, total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80845	0-10 min, non-overflow, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80846	10-20 min, non-overflow, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80847	20-30 min, non-overflow, dissolved	0.000035	0.000035	0.000035	0.000035	0.000035	0.000070
Water	80760	0-10 min, non-overflow, total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80761	10-20 min, non-overflow, total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	70762	20-30 min, non-overflow, total	0.000028	0.000028	0.000028	0.000028	0.000028	0.000055
		Hopper Inflow Monitoring						
Water	80800	3& 6 min, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80801	9&12 min, dissolved	0.000025	0.000020	0.000025	0.000025	0.000025	0.000050
Water	80802	15&18 min, dissolved	0.000025	0.000025	0.000046	0.000025	0.000025	0.000050
Water	80803	21&24 min, dissolved	0.000025	0.000011	0.000036	0.000025	0.000025	0.000050
Water	80804	27&30 min, dissolved	0.000025	0.000025	0.000043	0.000025	0.000025	0.000050
Water	80704	3& 6 min, total	0.000025	0.000031	0.000075	0.000021	0.000039	0.000035
Water	80705	9&12 min, total	0.000025	0.000018	0.000025	0.000025	0.000022	0.000095
Water	80706	15&18 min, total	0.000027	0.000046	0.000027	0.000027	0.000023	0.000060
Water	80707	21&24 min, total	0.000027	0.000027	0.000027	0.000027	0.000027	0.000110
Water	80708	27&30 min, total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000016
		Hopper Overflow Monitoring						
Water	80805	2& 4 min, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80806	6& 8 min, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80807	10&12 min, dissolved	0.000025	0.000013	0.000025	0.000025	0.000025	0.000050
Water	80808	14&16 min, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80809	18&20 min, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80710	2& 4 min, total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80711	6& 8 min, total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80712	10&12 min, total	0.000027	0.000027	0.000027	0.000027	0.000027	0.000053
Water	80713	14&16 min, total	0.000027	0.000027	0.000027	0.000027	0.000027	0.000012
Water	80714	18&20 min, total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
		Site Water						
Water	81612	Sample 1 Total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	81613	Sample 2 Total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	81614	Sample 3 Total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
		Elutriate						
Water	81618	Sample 1 Dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	81619	Sample 2 Dissolved	0.000025	0.000025	0.000025	0.000011	0.000025	0.000050
Water	81620	Sample 3 Dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	81615	Sample 1 Total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	81616	Sample 2 Total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	81617	Sample 3 Total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	ALDRIN	A-BHC	B-BHC	G-BHC	D-BHC	PPDDD
		Detection Limit (mg/kg)	0.00096	0.00096	0.00096	0.0018	0.00096	0.0019
		Insitu Sediment						
Sediment	81708	Sample #1	0.00096	0.00096	0.0012	0.0021	0.00096	0.0019
Sediment	81709	Sample #2	0.00096	0.00096	0.0013	0.0034	0.00096	0.0019
Sediment	81710	Sample #3	0.00096	0.00096	0.0012	0.0027	0.00096	0.0019
ALDRIN - Aldrin	A-BHC - A-BHC	B-BHC - B-BHC	G-BHC - G-BHC	D-BHC - D-BHC	PPDDD - PPDDD			
BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.								

Pestcoar

Delaware River Water Analysis (Coarse-Grained Site)

SAMPLE TYPE	DESCRIPTION	PPDDE	PPDDT	HPTCL	DIELDRIN	ENDOI	ENDOII	
	Detection Limit (mg/l)	0.000070	0.000070	0.0000350	0.000070	0.000035	0.000070	
	Plume Monitoring							
Water	80841 Background, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	80756 Background, total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	80842 0-10 min, overflow, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	80843 10-20 min, overflow, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	80844 20-30 min, overflow, dissolved	0.000050	0.000049	0.0000240	0.000049	0.000024	0.000049	
Water	80757 0-10 min, overflow, total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	80758 10-20 min, overflow, total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	80759 20-30 min, overflow, total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	80845 0-10 min, non-overflow, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	80846 10-20 min, non-overflow, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	80847 20-30 min, non-overflow, dissolved	0.000070	0.000070	0.0000350	0.000070	0.000035	0.000070	
Water	80760 0-10 min, non-overflow, total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	80761 10-20 min, non-overflow, total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	70762 20-30 min, non-overflow, total	0.000055	0.000055	0.0000280	0.000055	0.000028	0.000055	
	Hopper Inflow Monitoring							
Water	80800 3& 6 min, dissolved	0.000050	0.000050	0.0000100	0.000050	0.000025	0.000050	
Water	80801 9&12 min, dissolved	0.000050	0.000050	0.0000140	0.000050	0.000025	0.000050	
Water	80802 15&18 min, dissolved	0.000050	0.000050	0.0000270	0.000050	0.000025	0.000050	
Water	80803 21&24 min, dissolved	0.000050	0.000050	0.0000100	0.000050	0.000025	0.000050	
Water	80804 27&30 min, dissolved	0.000050	0.000050	0.0000130	0.000050	0.000010	0.000050	
Water	80704 3& 6 min, total	0.000050	0.000042	0.0000270	0.000050	0.000025	0.000050	
Water	80705 9&12 min, total	0.000024	0.000060	0.0000160	0.000050	0.000025	0.000050	
Water	80706 15&18 min, total	0.000023	0.000053	0.0000190	0.000053	0.000027	0.000053	
Water	80707 21&24 min, total	0.000017	0.000053	0.0000070	0.000053	0.000027	0.000053	
Water	80708 27&30 min, total	0.000029	0.000036	0.0000130	0.000027	0.000025	0.000050	
	Hopper Overflow Monitoring							
Water	80805 2& 4 min, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	80806 6& 8 min, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	80807 10&12 min, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	80808 14&16 min, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	80809 18&20 min, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	80710 2& 4 min, total	0.000010	0.000024	0.0000040	0.000050	0.000025	0.000050	
Water	80711 6& 8 min, total	0.000005	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	80712 10&12 min, total	0.000053	0.000053	0.0000270	0.000053	0.000027	0.000053	
Water	80713 14&16 min, total	0.000100	0.000053	0.0000270	0.000053	0.000027	0.000053	
Water	80714 18&20 min, total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
	Site Water							
Water	81612 Sample 1 Total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	81613 Sample 2 Total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	81614 Sample 3 Total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
	Elutriate							
Water	81618 Sample 1 Dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	81619 Sample 2 Dissolved	0.000050	0.000050	0.0000039	0.000050	0.000025	0.000050	
Water	81620 Sample 3 Dissolved	0.000050	0.000050	0.0000050	0.000050	0.000025	0.000050	
Water	81615 Sample 1 Total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	81616 Sample 2 Total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
Water	81617 Sample 3 Total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050	
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PPDDE	PPDDT	HPTCL	DIELDRIN	ENDOI	ENDOII
		Detection Limit (mg/kg)	0.0019	0.0019	0.00096	0.0036	0.00096	0.0019
		Insitu Sediment						
Sediment	81708 Sample #1	0.0019	0.0019	0.00059	0.00046	0.00096	0.0019	
Sediment	81709 Sample #2	0.0019	0.0019	0.00052	0.00067	0.00096	0.0019	
Sediment	81710 Sample #3	0.0019	0.0019	0.00049	0.00058	0.00096	0.0019	

PPDDE - PPDDE PPDDT - PPDDT HPTCL - Heptachlor DIELDRIN - Dieldrin ENDOI - A-Endosulfan ENDOII - B-Endosulfan
 BOLD = less than values
 Values below less than values are estimated results. Results are less than the reporting limit.

Pestcoar

Delaware River Water Analysis (Coarse-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	ENDOSU	ENDRIN	ENDALD	HPTCLE	METOXYCL	CLORDANE
		Detection Limit (mg/l)	0.000070	0.000070	0.000070	0.000035	0.00035	0.000035
Water	80841	Plume Monitoring Background, dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	0.000025
Water	80756	Background, total	0.000050	0.000050	0.000050	0.000025	0.00025	0.000025
Water	80842	0-10 min, overflow, dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	0.000025
Water	80843	10-20 min, overflow, dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	0.000025
Water	80844	20-30 min, overflow, dissolved	0.000049	0.000049	0.000049	0.000024	0.00024	0.000024
Water	80757	0-10 min, overflow, total	0.000050	0.000050	0.000050	0.000025	0.00025	0.000025
Water	80758	10-20 min, overflow, total	0.000050	0.000050	0.000050	0.000025	0.00025	0.000025
Water	80759	20-30 min, overflow, total	0.000050	0.000050	0.000050	0.000025	0.00025	0.000025
Water	80845	0-10 min, non-overflow, dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	0.000025
Water	80846	10-20 min, non-overflow, dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	0.000025
Water	80847	20-30 min, non-overflow, dissolved	0.000070	0.000070	0.000070	0.000035	0.00035	0.000035
Water	80760	0-10 min, non-overflow, total	0.000050	0.000050	0.000050	0.000025	0.00025	0.000025
Water	80761	10-20 min, non-overflow, total	0.000050	0.000050	0.000050	0.000025	0.00025	0.000025
Water	70762	20-30 min, non-overflow, total	0.000055	0.000055	0.000055	0.000028	0.00028	0.000028
Water	80800	Hopper Inflow Monitoring 3& 6 min, dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	80801	9&12 min, dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	80802	15&18 min, dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	80803	21&24 min, dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	80804	27&30 min, dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	80704	3& 6 min, total	0.000050	0.000018	0.000050	0.000020	0.00025	
Water	80705	9&12 min, total	0.000750	0.000012	0.000060	0.000011	0.00025	
Water	80706	15&18 min, total	0.000260	0.000020	0.000053	0.000023	0.00027	
Water	80707	21&24 min, total	0.000320	0.000053	0.000053	0.000027	0.00027	
Water	80708	27&30 min, total	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	80805	Hopper Overflow Monitoring 2& 4 min, dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	80806	6& 8 min, dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	80807	10&12 min, dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	80808	14&16 min, dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	80809	18&20 min, dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	80710	2& 4 min, total	0.000050	0.000050	0.000050	0.000009	0.00025	
Water	80711	6& 8 min, total	0.000050	0.000050	0.000050	0.000590	0.00025	
Water	80712	10&12 min, total	0.000053	0.000053	0.000053	0.000027	0.00027	
Water	80713	14&16 min, total	0.000053	0.000053	0.000053	0.000027	0.00027	
Water	80714	18&20 min, total	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	81612	Site Water Sample 1 Total	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	81613	Sample 2 Total	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	81614	Sample 3 Total	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	81618	Elutriate Sample 1 Dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	81619	Sample 2 Dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	81620	Sample 3 Dissolved	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	81615	Sample 1 Total	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	81616	Sample 2 Total	0.000050	0.000050	0.000050	0.000025	0.00025	
Water	81617	Sample 3 Total	0.000050	0.000050	0.000050	0.000025	0.00025	
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	ENDOSU	ENDRIN	ENDALD	HPTCLE	METOXYCL	
		Detection Limit (mg/kg)	0.0036	0.0036	0.0036	0.0018	0.018	
Sediment	81708	In situ Sediment Sample #1	0.00083	0.0019	0.0019	0.0014	0.0083	
Sediment	81709	Sample #2	0.00083	0.0019	0.0019	0.0020	0.0083	
Sediment	81710	Sample #3	0.00083	0.0019	0.0019	0.0020	0.0083	

ENDOSU - Endosulfan sulfate ENDRIN - Endrin ENDALD - Endrin Aldehyde HPTCLE - Heptachlor Epoxide METOXYCL - Methoxychlor
 CLORDANE - Chlordane
 BOLD - less than values
 Values below less than values are estimated results. Results are less than the reporting limit.

Pestcoar

Delaware River Water Analysis (Coarse-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	TOXAPHEN	TcLXYL-S	DCLBP	a-CHLORD	g-CHLORD
Detection Limit (mg/l)							
Plume Monitoring							
Water	80841	Background, dissolved	0.000250	81.60%	88.70%		
Water	80756	Background, total	0.000250	90.10%	93.00%		
Water	80842	0-10 min, overflow, dissolved	0.000250	87.70%	91.60%		
Water	80843	10-20 min, overflow, dissolved	0.000250	93.90%	102.00%		
Water	80844	20-30 min, overflow, dissolved	0.000240	92.30%	97.90%		
Water	80757	0-10 min, overflow, total	0.000250	88.00%	95.70%		
Water	80758	10-20 min, overflow, total	0.000250	82.40%	82.60%		
Water	80759	20-30 min, overflow, total	0.000250	89.20%	92.20%		
Water	80845	0-10 min, non-overflow, dissolved	0.000250	91.60%	101.00%		
Water	80846	10-20 min, non-overflow, dissolved	0.000250	74.70%	86.30%		
Water	80847	20-30 min, non-overflow, dissolved	0.000350	96.00%	103.00%		
Water	80760	0-10 min, non-overflow, total	0.000250	90.60%	95.30%		
Water	80761	10-20 min, non-overflow, total	0.000250	53.40%	72.90%		
Water	70762	20-30 min, non-overflow, total	0.000280	99.10%	101.00%		
Hopper Inflow Monitoring							
Water	80800	3& 6 min, dissolved	0.000025	79.14%	90.86%	0.000025	0.000025
Water	80801	9&12 min, dissolved	0.000025	77.94%	88.38%	0.000025	0.000025
Water	80802	15&18 min, dissolved	0.000025	65.90%	73.68%	0.000013	0.000025
Water	80803	21&24 min, dissolved	0.000025	75.24%	69.59%	0.000025	0.000025
Water	80804	27&30 min, dissolved	0.000025	78.33%	70.11%	0.000011	0.000016
Water	80704	3& 6 min, total	0.000250	68.26%	81.31%	0.000018	0.000048
Water	80705	9&12 min, total	0.000250	62.04%	99.69%	0.000014	0.000051
Water	80706	15&18 min, total	0.000270	68.15%	89.41%	0.000021	0.000052
Water	80707	21&24 min, total	0.000270	56.44%	69.56%	0.000025	0.000009
Water	80708	27&30 min, total	0.000250	52.93%	64.41%	0.000008	0.000018
Hopper Overflow Monitoring							
Water	80805	2& 4 min, dissolved	0.000025	93.58%	98.19%	0.000025	0.000025
Water	80806	6& 8 min, dissolved	0.000025	87.07%	92.15%	0.000025	0.000011
Water	80807	10&12 min, dissolved	0.000025	90.84%	97.36%	0.000016	0.000012
Water	80808	14&16 min, dissolved	0.000025	87.46%	95.06%	0.000025	0.000025
Water	80809	18&20 min, dissolved	0.000025	91.71%	94.46%	0.000025	0.000025
Water	80710	2& 4 min, total	0.000250	69.36%	69.00%	0.000025	0.000007
Water	80711	6& 8 min, total	0.000250	81.76%	75.25%	0.000025	0.000025
Water	80712	10&12 min, total	0.000270	73.21%	68.25%	0.000027	0.000071
Water	80713	14&16 min, total	0.000270	73.06%	66.74%	0.000027	0.000027
Water	80714	18&20 min, total	0.000250	82.29%	68.42%	0.000025	0.000025
Site Water							
Water	81612	Sample 1 Total	0.000250	79.55%	79.71%	0.000025	0.000025
Water	81613	Sample 2 Total	0.000250	83.18%	76.81%	0.000025	0.000025
Water	81614	Sample 3 Total	0.000250	80.62%	73.95%	0.000025	0.000025
Elutriate							
Water	81618	Sample 1 Dissolved	0.000250	82.64%	76.37%	0.000025	0.000025
Water	81619	Sample 2 Dissolved	0.000250	82.61%	74.72%	0.000025	0.000025
Water	81620	Sample 3 Dissolved	0.000250	82.47%	74.18%	0.000025	0.000025
Water	81615	Sample 1 Total	0.000250	81.55%	75.14%	0.000025	0.000025
Water	81616	Sample 2 Total	0.000250	79.75%	70.89%	0.000025	0.000025
Water	81617	Sample 3 Total	0.000250	80.50%	74.91%	0.000025	0.000025
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	TOXAPHEN	TcLXYL-S	DCLBP	a-CHLORD	g-CHLORD
Detection Limit (mg/kg)							
In situ Sediment							
Sediment	81708	Sample #1	0.0096	90.16%	90.52%	0.00096	0.0011
Sediment	81709	Sample #2	0.0096	85.63%	90.13%	0.00096	0.0013
Sediment	81710	Sample #3	0.0096	84.81%	90.58%	0.00096	0.0022

TOXAPHEN - Toxaphene TcLXYL-S - 2,4,5,6-Tetrachloro-m-xylene(Surrogate(60-150 WS))

a-CHLORD - a-CHLORDANE g-CHLORD - g-CHLORDANE

BOLD - less than values

Values below less than values are estimated results. Results are less than the reporting limit.

PCBscoar									
Delaware River Water Analysis (Coarse-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 22	PCB 33	PCB 37	PCB 42	PCB 47	PCB 64	PCB 74
		Detection Limit (mg/l)	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80834	Plume Monitoring							
Water	80749	Background, dissolved	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80749	Background, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80835	0-10 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80836	10-20 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80837	20-30 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80750	0-10 min, overflow, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80751	10-20 min, overflow, total	0.0000004	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80752	20-30 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80838	0-10 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80839	10-20 min, non-overflow, dissolve	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80840	20-30 min, non-overflow, dissolve	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80753	0-10 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80754	10-20 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80755	20-30 min, non-overflow, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
		Hopper Inflow Monitoring							
Water	80790	3& 6 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000022	0.0000010	0.0000010	0.0000010
Water	80791	9&12 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000020	0.0000010	0.0000010	0.0000010
Water	80792	15&18 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000014	0.0000005	0.0000010	0.0000010
Water	80793	21&24 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000012	0.0000015	0.0000010	0.0000010
Water	80794	27&30 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000009	0.0000008	0.0000010	0.0000010
Water	80692	3& 6 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80693	9&12 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80694	15&18 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80695	21&24 min, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000027	0.0000011
Water	80696	27&30 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000020	0.0000010
		Hopper Overflow Monitoring							
Water	80795	2& 4 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000017	0.0000010	0.0000010	0.0000010
Water	80796	6& 8 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000019	0.0000010	0.0000010	0.0000010
Water	80797	10&12 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000011	0.0000010	0.0000010	0.0000010
Water	80798	14&16 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000015	0.0000010	0.0000010	0.0000010
Water	80799	18&20 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80698	2& 4 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80699	6& 8 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80700	10&12 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80701	14&16 min, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80702	18&20 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Site Water							
Water	81594	Sample 1 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81595	Sample 2 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81596	Sample 3 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Elutriate							
Water	81600	Sample 1 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81601	Sample 2 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81602	Sample 3 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81597	Sample 1 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81598	Sample 2 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81599	Sample 3 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
SAMPLE	SAMPLE ID	DESCRIPTION	PCB 22	PCB 33	PCB 37	PCB 42	PCB 47	PCB 64	PCB 74
		Detection Limit (mg/kg)	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
		In situ Sediment							
Sediment	81714	Sample #1	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81715	Sample #2	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81716	Sample #3	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033

BOLD - less than values
Values below less than values are estimated results. Results are less than the reporting limit.

PCBscoar									
Delaware River Water Analysis (Coarse-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 80	PCB 81	PCB 84	PCB 91	PCB 92	PCB 95	PCB 99
		Detection Limit (mg/l)	0.0000011	0.0000011	0.00000110	0.0000011	0.0000011	0.00000110	0.00000110
Water	80834	Plume Monitoring							
Water	80749	Background, dissolved	0.0000011	0.0000011	0.00000110	0.0000011	0.0000011	0.00000080	0.00000110
Water	80749	Background, total	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000060	0.00000100
Water	80835	0-10 min, overflow, dissolved	0.0000010	0.0000010	0.00000060	0.0000010	0.0000010	0.00000090	0.00000100
Water	80836	10-20 min, overflow, dissolved	0.0000010	0.0000010	0.00000060	0.0000010	0.0000010	0.00000080	0.00000040
Water	80837	20-30 min, overflow, dissolved	0.0000010	0.0000010	0.00000050	0.0000010	0.0000010	0.00000090	0.00000070
Water	80750	0-10 min, overflow, total	0.0000011	0.0000011	0.00000110	0.0000011	0.0000011	0.00000110	0.00000110
Water	80751	10-20 min, overflow, total	0.0000010	0.0000010	0.00000040	0.0000010	0.0000010	0.00000090	0.00000100
Water	80752	20-30 min, overflow, total	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000050	0.00000100
Water	80838	0-10 min, non-overflow, dissolve	0.0000010	0.0000010	0.00000080	0.0000010	0.0000010	0.00000080	0.00000050
Water	80839	10-20 min, non-overflow, dissolve	0.0000011	0.0000011	0.00000050	0.0000011	0.0000011	0.00000090	0.00000040
Water	80840	20-30 min, non-overflow, dissolve	0.0000011	0.0000011	0.00000050	0.0000011	0.0000011	0.00000110	0.00000040
Water	80753	0-10 min, non-overflow, total	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000050	0.00000100
Water	80754	10-20 min, non-overflow, total	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000070	0.00000100
Water	80755	20-30 min, non-overflow, total	0.0000011	0.0000011	0.00000110	0.0000011	0.0000011	0.00000110	0.00000050
		Hopper Inflow Monitoring							
Water	80790	38-6 min, dissolved	0.0000010	0.0000010	0.00000140	0.0000010	0.0000010	0.00000120	0.00000050
Water	80791	98-12 min, dissolved	0.0000010	0.0000010	0.00000110	0.0000010	0.0000010	0.00000110	0.00000040
Water	80792	158-18 min, dissolved	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000100	0.00000100
Water	80793	21&24 min, dissolved	0.0000010	0.0000010	0.00000110	0.0000010	0.0000010	0.00000160	0.00000060
Water	80794	27&30 min, dissolved	0.0000010	0.0000010	0.00000170	0.0000010	0.0000010	0.00000160	0.00000100
Water	80692	38-6 min, total	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000120	0.00000100
Water	80693	98-12 min, total	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000140	0.00000100
Water	80694	158-18 min, total	0.0000010	0.0000010	0.00000280	0.0000010	0.0000010	0.00000230	0.00000100
Water	80695	21&24 min, total	0.0000011	0.0000011	0.00000330	0.0000011	0.0000011	0.00000290	0.00000060
Water	80696	27&30 min, total	0.0000010	0.0000010	0.00000240	0.0000010	0.0000010	0.00000200	0.00000130
		Hopper Overflow Monitoring							
Water	80795	28-4 min, dissolved	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000100	0.00000100
Water	80796	68-8 min, dissolved	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000050	0.00000100
Water	80797	108-12 min, dissolved	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000050	0.00000100
Water	80798	148-16 min, dissolved	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000060	0.00000100
Water	80799	188-20 min, dissolved	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000060	0.00000100
Water	80698	28-4 min, total	0.0000010	0.0000010	0.00000120	0.0000010	0.0000010	0.00000130	0.00000100
Water	80699	68-8 min, total	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000090	0.00000100
Water	80700	108-12 min, total	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000140	0.00000100
Water	80701	148-16 min, total	0.0000011	0.0000011	0.00000110	0.0000011	0.0000011	0.00000110	0.00000110
Water	80702	188-20 min, total	0.0000010	0.0000010	0.00000080	0.0000010	0.0000010	0.00000180	0.00000100
		Site Water							
Water	81594	Sample 1 Total	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000100	0.00000100
Water	81595	Sample 2 Total	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000090	0.00000047
Water	81596	Sample 3 Total	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000100	0.00000100
		Elutriate							
Water	81600	Sample 1 Dissolved	0.0000010	0.0000010	0.00000043	0.0000010	0.0000010	0.00000086	0.00000100
Water	81601	Sample 2 Dissolved	0.0000010	0.0000010	0.00000034	0.0000010	0.0000010	0.00000065	0.00000100
Water	81602	Sample 3 Dissolved	0.0000010	0.0000010	0.00000035	0.0000010	0.0000010	0.00000069	0.00000032
Water	81597	Sample 1 Total	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000048	0.00000100
Water	81598	Sample 2 Total	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.000000150	0.00000049
Water	81599	Sample 3 Total	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010	0.00000100	0.00000100
SAMPLE	SAMPLE ID	DESCRIPTION	PCB 80	PCB 81	PCB 84	PCB 91	PCB 92	PCB 95	PCB 99
		Detection Limit (mg/kg)	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
		Insitu Sediment							
Sediment	81714	Sample #1	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81715	Sample #2	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81716	Sample #3	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033

BOLD - less than values
Values below less than values are estimated results. Results are less than the reporting limit.

PCBscoar									
Delaware River Water Analysis (Coarse-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 110	PCB 119	PCB 120	PCB 123	PCB 126	PCB 127	PCB 132
		Detection Limit (mg/l)	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80834	Plume Monitoring							
Water	80749	Background, dissolved	0.00000100	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80749	Background, total	0.00000050	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80835	0-10 min, overflow, dissolved	0.00000090	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80836	10-20 min, overflow, dissolved	0.00000110	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80837	20-30 min, overflow, dissolved	0.00000080	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80750	0-10 min, overflow, total	0.00000050	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80751	10-20 min, overflow, total	0.00000070	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80752	20-30 min, overflow, total	0.00000050	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80838	0-10 min, non-overflow, dissolve	0.00000110	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80839	10-20 min, non-overflow, dissolve	0.00000070	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80840	20-30 min, non-overflow, dissolve	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80753	0-10 min, non-overflow, total	0.00000050	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80754	10-20 min, non-overflow, total	0.00000060	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80755	20-30 min, non-overflow, total	0.00000090	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000005
		Hopper Inflow Monitoring							
Water	80790	3& 6 min, dissolved	0.00000210	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80791	9812 min, dissolved	0.00000160	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80792	15818 min, dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80793	21824 min, dissolved	0.00000160	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80794	27830 min, dissolved	0.00000160	0.0000010	0.0000007	0.0000010	0.0000010	0.0000010	0.0000010
Water	80692	3& 6 min, total	0.00000160	0.0000010	0.0000026	0.0000010	0.0000010	0.0000010	0.0000010
Water	80693	9812 min, total	0.00000200	0.0000010	0.0000019	0.0000010	0.0000010	0.0000010	0.0000010
Water	80694	15818 min, total	0.00000260	0.0000010	0.0000054	0.0000010	0.0000010	0.0000010	0.0000010
Water	80695	21824 min, total	0.00000260	0.0000011	0.0000061	0.0000011	0.0000011	0.0000011	0.0000011
Water	80696	27830 min, total	0.00000230	0.0000010	0.0000071	0.0000010	0.0000010	0.0000010	0.0000010
		Hopper Overflow Monitoring							
Water	80795	28 4 min, dissolved	0.00000070	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80796	6& 8 min, dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80797	10812 min, dissolved	0.00000050	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80798	14816 min, dissolved	0.00000060	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80799	18820 min, dissolved	0.00000050	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80698	2& 4 min, total	0.00000150	0.0000010	0.0000008	0.0000010	0.0000010	0.0000010	0.0000010
Water	80699	6& 8 min, total	0.00000120	0.0000010	0.0000005	0.0000010	0.0000010	0.0000010	0.0000010
Water	80700	10812 min, total	0.00000150	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80701	14816 min, total	0.00000110	0.0000011	0.0000006	0.0000011	0.0000011	0.0000011	0.0000011
Water	80702	18820 min, total	0.00000160	0.0000010	0.0000005	0.0000010	0.0000010	0.0000010	0.0000010
		Site Water							
Water	81594	Sample 1 Total	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81595	Sample 2 Total	0.00000097	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81596	Sample 3 Total	0.00000077	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Elutriate							
Water	81600	Sample 1 Dissolved	0.00000091	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81601	Sample 2 Dissolved	0.00000063	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81602	Sample 3 Dissolved	0.00000064	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81597	Sample 1 Total	0.00000061	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81598	Sample 2 Total	0.000000110	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81599	Sample 3 Total	0.00000059	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 110	PCB 119	PCB 120	PCB 123	PCB 126	PCB 127	PCB 132
		Detection Limit (mg/kg)	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
		In situ Sediment							
Sediment	81714	Sample #1	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81715	Sample #2	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81716	Sample #3	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.									
Page 3									

PCBscoar

Delaware River Water Analysis (Coarse-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 135	PCB 146	PCB 149	PCB 157	PCB 158	PCB 166	PCB 168
		Detection Limit (mg/l)	0.0000011	0.00000110	0.00000110	0.0000011	0.0000011	0.0000011	0.00000110
Water	80834	Plume Monitoring							
Water	80749	Background, dissolved	0.0000011	0.00000110	0.00000110	0.0000011	0.0000011	0.0000011	0.00000110
Water	80749	Background, total	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80835	0-10 min, overflow, dissolved	0.0000010	0.00000100	0.00000040	0.0000010	0.0000010	0.0000010	0.00000100
Water	80836	10-20 min, overflow, dissolved	0.0000010	0.00000050	0.00000040	0.0000010	0.0000010	0.0000010	0.00000100
Water	80837	20-30 min, overflow, dissolved	0.0000010	0.00000100	0.00000040	0.0000010	0.0000010	0.0000010	0.00000100
Water	80750	0-10 min, overflow, total	0.0000011	0.00000110	0.00000110	0.0000011	0.0000011	0.0000011	0.00000110
Water	80751	10-20 min, overflow, total	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80752	20-30 min, overflow, total	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80838	0-10 min, non-overflow, dissolve	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80839	10-20 min, non-overflow, dissolve	0.0000011	0.00000110	0.00000110	0.0000011	0.0000011	0.0000011	0.00000110
Water	80840	20-30 min, non-overflow, dissolve	0.0000011	0.00000110	0.00000110	0.0000011	0.0000011	0.0000011	0.00000110
Water	80753	0-10 min, non-overflow, total	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80754	10-20 min, non-overflow, total	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80755	20-30 min, non-overflow, total	0.0000011	0.00000110	0.00000110	0.0000011	0.0000011	0.0000011	0.00000110
		Hopper Inflow Monitoring							
Water	80790	38-6 min, dissolved	0.0000010	0.00000100	0.00000040	0.0000010	0.0000010	0.0000010	0.00000100
Water	80791	98-12 min, dissolved	0.0000010	0.00000100	0.00000040	0.0000010	0.0000010	0.0000010	0.00000100
Water	80792	158-18 min, dissolved	0.0000010	0.00000100	0.00000040	0.0000010	0.0000010	0.0000010	0.00000100
Water	80793	218-24 min, dissolved	0.0000010	0.00000100	0.00000070	0.0000010	0.0000010	0.0000010	0.00000100
Water	80794	278-30 min, dissolved	0.0000010	0.00000100	0.00000130	0.0000010	0.0000010	0.0000010	0.00000100
Water	80692	38-6 min, total	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000075
Water	80693	98-12 min, total	0.0000010	0.00000100	0.00000130	0.0000010	0.0000010	0.0000010	0.00000075
Water	80694	158-18 min, total	0.0000010	0.00000100	0.00000290	0.0000010	0.0000010	0.0000010	0.00000160
Water	80695	218-24 min, total	0.0000011	0.00000100	0.00000300	0.0000011	0.0000011	0.0000011	0.00000140
Water	80696	278-30 min, total	0.0000010	0.00000097	0.00000300	0.0000010	0.0000010	0.0000010	0.00000100
		Hopper Overflow Monitoring							
Water	80795	28-4 min, dissolved	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80796	6-8 min, dissolved	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80797	108-12 min, dissolved	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80798	148-16 min, dissolved	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80799	188-20 min, dissolved	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80698	28-4 min, total	0.0000010	0.00000070	0.00000160	0.0000010	0.0000010	0.0000010	0.00000061
Water	80699	6-8 min, total	0.0000010	0.00000100	0.00000088	0.0000010	0.0000010	0.0000010	0.00000100
Water	80700	108-12 min, total	0.0000010	0.00000100	0.00000120	0.0000010	0.0000010	0.0000010	0.00000100
Water	80701	148-16 min, total	0.0000011	0.00000067	0.00000240	0.0000011	0.0000011	0.0000011	0.00000110
Water	80702	188-20 min, total	0.0000010	0.00000064	0.00000110	0.0000010	0.0000010	0.0000010	0.00000100
		Site Water							
Water	81594	Sample 1 Total	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	81595	Sample 2 Total	0.0000010	0.00000100	0.00000050	0.0000010	0.0000010	0.0000010	0.00000100
Water	81596	Sample 3 Total	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
		Elutriate							
Water	81600	Sample 1 Dissolved	0.0000010	0.00000100	0.00000038	0.0000010	0.0000010	0.0000010	0.00000100
Water	81601	Sample 2 Dissolved	0.0000010	0.00000100	0.00000037	0.0000010	0.0000010	0.0000010	0.00000100
Water	81602	Sample 3 Dissolved	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	81597	Sample 1 Total	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	81598	Sample 2 Total	0.0000010	0.00000100	0.00000066	0.0000010	0.0000010	0.0000010	0.00000100
Water	81599	Sample 3 Total	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 135	PCB 146	PCB 149	PCB 157	PCB 158	PCB 166	PCB 168
		Detection Limit (mg/kg)	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
		In situ Sediment							
Sediment	81714	Sample #1	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81715	Sample #2	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81716	Sample #3	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033

BOLD - less than values
Values below less than values are estimated results. Results are less than the reporting limit.

PCBscoar

Delaware River Water Analysis (Coarse-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 169	PCB 174	PCB 177	PCB 178	PCB 179	PCB 8	PCB 18
		Detection Limit (mg/l)	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110
Water	80834	Plume Monitoring							
Water	80749	Background, dissolved	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110
Water	80749	Background, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80835	0-10 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80836	10-20 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80837	20-30 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80750	0-10 min, overflow, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110
Water	80751	10-20 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80752	20-30 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80838	0-10 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80839	10-20 min, non-overflow, dissolve	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110
Water	80840	20-30 min, non-overflow, dissolve	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110
Water	80753	0-10 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80754	10-20 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80755	20-30 min, non-overflow, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110
		Hopper Inflow Monitoring							
Water	80790	3& 6 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000460
Water	80791	9&12 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80792	15&18 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80793	21&24 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80794	27&30 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80692	3& 6 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80693	9&12 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80694	15&18 min, total	0.0000010	0.0000084	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80695	21&24 min, total	0.0000011	0.0000058	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110
Water	80696	27&30 min, total	0.0000010	0.0000042	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
		Hopper Overflow Monitoring							
Water	80795	2& 4 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80796	6& 8 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80797	10&12 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80798	14&16 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80799	18&20 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80698	2& 4 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80699	6& 8 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80700	10&12 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80701	14&16 min, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110
Water	80702	18&20 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
		Site Water							
Water	81594	Sample 1 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000070
Water	81595	Sample 2 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000063
Water	81596	Sample 3 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000062
		Elutriate							
Water	81600	Sample 1 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	81601	Sample 2 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	81602	Sample 3 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	81597	Sample 1 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000052
Water	81598	Sample 2 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000058
Water	81599	Sample 3 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 169	PCB 174	PCB 177	PCB 178	PCB 179	PCB 8	PCB 18
		Detection Limit (mg/kg)	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
		In situ Sediment							
Sediment	81714	Sample #1	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81715	Sample #2	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81716	Sample #3	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033

BOLD - less than values

Values below less than values are estimated results. Results are less than the reporting limit.

PCBscoar

Delaware River Water Analysis (Coarse-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 28	PCB 31	PCB 40	PCB 44	PCB 49	PCB 52	PCB 60
		Detection Limit (mg/l)	0.0000011	0.0000011	0.0000011	0.00000110	0.0000011	0.00000110	0.0000011
Water	80834	Plume Monitoring							
Water	80749	Background, dissolved	0.0000011	0.0000011	0.0000011	0.00000140	0.0000011	0.00000090	0.0000011
Water	80749	Background, total	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000060	0.0000010
Water	80835	0-10 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000090	0.0000010
Water	80836	10-20 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000110	0.0000010
Water	80837	20-30 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.00000080	0.0000010	0.00000100	0.0000010
Water	80750	0-10 min, overflow, total	0.0000011	0.0000011	0.0000011	0.00000110	0.0000011	0.00000060	0.0000011
Water	80751	10-20 min, overflow, total	0.0000010	0.0000051	0.0000010	0.00000100	0.0000010	0.00000090	0.0000010
Water	80752	20-30 min, overflow, total	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000050	0.0000010
Water	80838	0-10 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.00000130	0.0000010	0.00000090	0.0000010
Water	80839	10-20 min, non-overflow, dissolve	0.0000011	0.0000011	0.0000011	0.00000110	0.0000011	0.00000090	0.0000011
Water	80840	20-30 min, non-overflow, dissolve	0.0000011	0.0000011	0.0000011	0.00000070	0.0000011	0.00000100	0.0000011
Water	80753	0-10 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000060	0.0000010
Water	80754	10-20 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000080	0.0000010
Water	80755	20-30 min, non-overflow, total	0.0000011	0.0000011	0.0000010	0.00000110	0.0000011	0.00000110	0.0000011
		Hopper Inflow Monitoring							
Water	80790	3& 6 min, dissolved	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000050	0.0000010
Water	80791	9812 min, dissolved	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000080	0.0000010
Water	80792	15818 min, dissolved	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000040	0.0000010
Water	80793	21824 min, dissolved	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000000	0.0000010
Water	80794	27830 min, dissolved	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000100	0.0000010
Water	80692	3& 6 min, total	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000100	0.0000010
Water	80693	9812 min, total	0.0000010	0.0000010	0.0000010	0.00000110	0.0000041	0.00000100	0.0000010
Water	80694	15818 min, total	0.0000010	0.0000010	0.0000010	0.00000170	0.0000010	0.00000200	0.0000010
Water	80695	21824 min, total	0.0000011	0.0000011	0.0000011	0.00000210	0.0000011	0.00000280	0.0000011
Water	80696	27830 min, total	0.0000010	0.0000010	0.0000010	0.00000470	0.0000010	0.00000390	0.0000010
		Hopper Overflow Monitoring							
Water	80795	28 4 min, dissolved	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000100	0.0000010
Water	80796	6& 8 min, dissolved	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000060	0.0000010
Water	80797	10812 min, dissolved	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000050	0.0000010
Water	80798	14&16 min, dissolved	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000060	0.0000010
Water	80799	18820 min, dissolved	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000060	0.0000010
Water	80698	2& 4 min, total	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000100	0.0000010
Water	80699	6& 8 min, total	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.00000094	0.0000010
Water	80700	10812 min, total	0.0000010	0.0000010	0.0000010	0.00000063	0.0000010	0.00000100	0.0000010
Water	80701	14&16 min, total	0.0000011	0.0000011	0.0000011	0.00000110	0.0000011	0.00000089	0.0000011
Water	80702	18820 min, total	0.0000010	0.0000010	0.0000010	0.00000060	0.0000010	0.00000140	0.0000010
		Site Water							
Water	81594	Sample 1 Total	0.0000010	0.0000022	0.0000010	0.00000100	0.0000010	0.00000082	0.0000010
Water	81595	Sample 2 Total	0.0000010	0.0000033	0.0000010	0.0000064	0.0000010	0.00000096	0.0000010
Water	81596	Sample 3 Total	0.0000010	0.0000036	0.0000010	0.0000073	0.0000010	0.00000078	0.0000010
		Elutriate							
Water	81600	Sample 1 Dissolved	0.0000010	0.0000032	0.0000010	0.00000100	0.0000010	0.00000100	0.0000010
Water	81601	Sample 2 Dissolved	0.0000010	0.0000022	0.0000010	0.00000100	0.0000010	0.00000084	0.0000010
Water	81602	Sample 3 Dissolved	0.0000010	0.0000032	0.0000010	0.00000100	0.0000010	0.00000095	0.0000010
Water	81597	Sample 1 Total	0.0000010	0.0000021	0.0000010	0.00000100	0.0000010	0.00000054	0.0000010
Water	81598	Sample 2 Total	0.0000010	0.0000040	0.0000010	0.00000130	0.0000010	0.00000170	0.0000010
Water	81599	Sample 3 Total	0.0000010	0.0000025	0.0000010	0.00000100	0.0000010	0.00000058	0.0000010
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 28	PCB 31	PCB 40	PCB 44	PCB 49	PCB 52	PCB 60
		Detection Limit (mg/kg)	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
		In situ Sediment							
Sediment	81714	Sample #1	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81715	Sample #2	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81716	Sample #3	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033

BOLD - less than values
Values below less than values are estimated results. Results are less than the reporting limit.

PCBscoar

Delaware River Water Analysis (Coarse-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 70	PCB 77	PCB 82	PCB 86	PCB 87	PCB 97	PCB 101
		Detection Limit (mg/l)	0.00000110	0.0000011	0.0000011	0.00000110	0.00000110	0.00000110	0.00000110
Water	80834	Plume Monitoring							
Water	80749	Background, dissolved	0.00000110	0.0000011	0.0000011	0.00000090	0.00000080	0.00000090	0.00000090
Water	80749	Background, total	0.00000100	0.0000010	0.0000010	0.00000080	0.00000050	0.00000080	0.00000050
Water	80835	0-10 min, overflow, dissolved	0.00000040	0.0000010	0.0000010	0.00000070	0.00000080	0.00000070	0.00000090
Water	80836	10-20 min, overflow, dissolved	0.00000040	0.0000010	0.0000010	0.00000070	0.00000050	0.00000070	0.00000110
Water	80837	20-30 min, overflow, dissolved	0.00000040	0.0000010	0.0000010	0.00000060	0.00000040	0.00000060	0.00000090
Water	80750	0-10 min, overflow, total	0.00000050	0.0000011	0.0000011	0.00000110	0.00000040	0.00000110	0.00000060
Water	80751	10-20 min, overflow, total	0.00000050	0.0000010	0.0000010	0.00000040	0.00000080	0.00000040	0.00000060
Water	80752	20-30 min, overflow, total	0.00000040	0.0000010	0.0000010	0.00000050	0.00000100	0.00000050	0.00000050
Water	80838	0-10 min, non-overflow, dissolve	0.00000050	0.0000010	0.0000010	0.00000080	0.00000070	0.00000080	0.00000090
Water	80839	10-20 min, non-overflow, dissolve	0.00000050	0.0000011	0.0000011	0.00000060	0.00000070	0.00000060	0.00000090
Water	80840	20-30 min, non-overflow, dissolve	0.00000060	0.0000011	0.0000011	0.00000100	0.00000080	0.00000100	0.00000090
Water	80753	0-10 min, non-overflow, total	0.00000100	0.0000010	0.0000010	0.00000040	0.00000050	0.00000040	0.00000050
Water	80754	10-20 min, non-overflow, total	0.00000100	0.0000010	0.0000010	0.00000040	0.00000050	0.00000040	0.00000070
Water	80755	20-30 min, non-overflow, total	0.00000050	0.0000010	0.0000011	0.00000100	0.00000070	0.00000110	0.00000110
		Hopper Inflow Monitoring							
Water	80790	3& 6 min, dissolved	0.00000040	0.0000010	0.0000010	0.00000080	0.00000110	0.00000080	0.00000140
Water	80791	9812 min, dissolved	0.00000100	0.0000010	0.0000010	0.00000060	0.00000090	0.00000060	0.00000120
Water	80792	15818 min, dissolved	0.00000040	0.0000010	0.0000010	0.00000100	0.00000130	0.00000100	0.00000100
Water	80793	21824 min, dissolved	0.00000060	0.0000010	0.0000010	0.00000130	0.00000150	0.00000130	0.00000030
Water	80794	27830 min, dissolved	0.00000090	0.0000010	0.0000010	0.00000180	0.00000110	0.00000180	0.00000100
Water	80692	3& 6 min, total	0.00000280	0.0000010	0.0000010	0.00000190	0.00000100	0.00000190	0.00000430
Water	80693	9812 min, total	0.00000180	0.0000010	0.0000010	0.00000088	0.00000100	0.00000088	0.00000300
Water	80694	15818 min, total	0.00000250	0.0000010	0.0000010	0.00000290	0.00000100	0.00000290	0.00000390
Water	80695	21824 min, total	0.00000150	0.0000011	0.0000011	0.00000049	0.00000110	0.00000049	0.00000360
Water	80696	27830 min, total	0.00000140	0.0000010	0.0000010	0.00000220	0.00000100	0.00000220	0.00000380
		Hopper Overflow Monitoring							
Water	80795	2& 4 min, dissolved	0.00000100	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000080
Water	80796	6& 8 min, dissolved	0.00000100	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000100
Water	80797	10&12 min, dissolved	0.00000030	0.0000010	0.0000010	0.00000100	0.00000050	0.00000100	0.00000100
Water	80798	14816 min, dissolved	0.00000050	0.0000010	0.0000010	0.00000040	0.00000100	0.00000040	0.00000100
Water	80799	18820 min, dissolved	0.00000040	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000100
Water	80698	2& 4 min, total	0.00000100	0.0000010	0.0000010	0.00000061	0.00000100	0.00000061	0.00000240
Water	80699	6& 8 min, total	0.00000073	0.0000010	0.0000010	0.00000044	0.00000100	0.00000044	0.00000140
Water	80700	10&12 min, total	0.00000100	0.0000010	0.0000010	0.00000051	0.00000063	0.00000051	0.00000200
Water	80701	14&16 min, total	0.00000110	0.0000011	0.0000011	0.00000052	0.00000110	0.00000052	0.00000210
Water	80702	18&20 min, total	0.00000100	0.0000010	0.0000010	0.00000063	0.00000100	0.00000063	0.00000240
		Site Water							
Water	81594	Sample 1 Total	0.00000058	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000079
Water	81595	Sample 2 Total	0.00000078	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000130
Water	81596	Sample 3 Total	0.00000078	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000110
		Elutriate							
Water	81600	Sample 1 Dissolved	0.00000100	0.0000010	0.0000010	0.00000100	0.00000038	0.00000100	0.00000100
Water	81601	Sample 2 Dissolved	0.00000100	0.0000010	0.0000010	0.00000100	0.00000062	0.00000100	0.00000071
Water	81602	Sample 3 Dissolved	0.00000049	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000077
Water	81597	Sample 1 Total	0.00000053	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000054
Water	81598	Sample 2 Total	0.000000120	0.0000010	0.0000010	0.00000057	0.00000068	0.00000057	0.00000160
Water	81599	Sample 3 Total	0.00000052	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000078
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 70	PCB 77	PCB 82	PCB 86	PCB 87	PCB 97	PCB 101
		Detection Limit (mg/kg)	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
		In situ Sediment							
Sediment	81714	Sample #1	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81715	Sample #2	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81716	Sample #3	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033

BOLD - less than values

Values below less than values are estimated results. Results are less than the reporting limit.

PCBscoar									
Delaware River Water Analysis (Coarse-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 105	PCB 114	PCB 118	PCB 121	PCB 128	PCB 136	PCB 137
		Detection Limit (mg/l)	0.00000110	0.0000011	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011
Water	80834	Plume Monitoring							
Water	80749	Background, dissolved	0.00000110	0.0000011	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011
Water	80749	Background, total	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80835	0-10 min, overflow, dissolved	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80836	10-20 min, overflow, dissolved	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80837	20-30 min, overflow, dissolved	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80750	0-10 min, overflow, total	0.00000110	0.0000011	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011
Water	80751	10-20 min, overflow, total	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80752	20-30 min, overflow, total	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80838	0-10 min, non-overflow, dissolve	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80839	10-20 min, non-overflow, dissolve	0.00000110	0.0000011	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011
Water	80840	20-30 min, non-overflow, dissolve	0.00000110	0.0000011	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011
Water	80753	0-10 min, non-overflow, total	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80754	10-20 min, non-overflow, total	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80755	20-30 min, non-overflow, total	0.00000110	0.0000011	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011
		Hopper Inflow Monitoring							
Water	80790	3& 6 min, dissolved	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80791	9&12 min, dissolved	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80792	15&18 min, dissolved	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80793	21&24 min, dissolved	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80794	27&30 min, dissolved	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80692	3& 6 min, total	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80693	9&12 min, total	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80694	15&18 min, total	0.00000250	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80695	21&24 min, total	0.00000240	0.0000011	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011
Water	80696	27&30 min, total	0.00000250	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
		Hopper Overflow Monitoring							
Water	80795	2& 4 min, dissolved	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80796	6& 8 min, dissolved	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80797	10&12 min, dissolved	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80798	14&16 min, dissolved	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80799	18&20 min, dissolved	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80698	2& 4 min, total	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80699	6& 8 min, total	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80700	10&12 min, total	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80701	14&16 min, total	0.00000110	0.0000011	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011
Water	80702	18&20 min, total	0.00000100	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
		Site Water							
Water	81594	Sample 1 Total	0.00000100	0.0000010	0.00000054	0.0000010	0.0000010	0.0000010	0.0000010
Water	81595	Sample 2 Total	0.00000047	0.0000010	0.00000097	0.0000010	0.0000010	0.0000010	0.0000010
Water	81596	Sample 3 Total	0.00000100	0.0000010	0.00000057	0.0000010	0.0000010	0.0000010	0.0000010
		Elutriate							
Water	81600	Sample 1 Dissolved	0.00000036	0.0000010	0.00000062	0.0000010	0.0000010	0.0000010	0.0000010
Water	81601	Sample 2 Dissolved	0.00000032	0.0000010	0.00000046	0.0000010	0.0000010	0.0000010	0.0000010
Water	81602	Sample 3 Dissolved	0.00000042	0.0000010	0.00000065	0.0000010	0.0000010	0.0000010	0.0000010
Water	81597	Sample 1 Total	0.00000100	0.0000010	0.00000049	0.0000010	0.0000010	0.0000010	0.0000010
Water	81598	Sample 2 Total	0.00000100	0.0000010	0.00000086	0.0000010	0.0000010	0.0000010	0.0000010
Water	81599	Sample 3 Total	0.00000100	0.0000010	0.00000049	0.0000010	0.0000010	0.0000010	0.0000010
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 105	PCB 114	PCB 118	PCB 121	PCB 128	PCB 136	PCB 137
		Detection Limit (mg/kg)	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
		In situ Sediment							
Sediment	81714	Sample #1	0.00033	0.00033	0.00010	0.00033	0.00033	0.00033	0.00033
Sediment	81715	Sample #2	0.00033	0.00033	0.00016	0.00033	0.00033	0.00033	0.00033
Sediment	81716	Sample #3	0.00033	0.00033	0.00020	0.00033	0.00033	0.00033	0.00033
BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.									

PCBscoar									
Delaware River Water Analysis (Coarse-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 138	PCB 141	PCB 151	PCB 153	PCB 156	PCB 167	PCB 170
		Detection Limit (mg/l)	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110
Water	80834	Plume Monitoring							
Water	80749	Background, dissolved	0.0000011	0.0000011	0.0000011	0.0000007	0.0000011	0.0000011	0.00000110
Water	80749	Background, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80835	0-10 min, overflow, dissolved	0.0000004	0.0000010	0.0000010	0.0000009	0.0000010	0.0000010	0.00000100
Water	80836	10-20 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80837	20-30 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000005	0.0000010	0.0000010	0.00000100
Water	80750	0-10 min, overflow, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110
Water	80751	10-20 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80752	20-30 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80838	0-10 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80839	10-20 min, non-overflow, dissolve	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110
Water	80840	20-30 min, non-overflow, dissolve	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110
Water	80753	0-10 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80754	10-20 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80755	20-30 min, non-overflow, total	0.0000011	0.0000011	0.0000011	0.0000010	0.0000011	0.0000011	0.00000110
		Hopper Inflow Monitoring							
Water	80790	38-6 min, dissolved	0.0000006	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80791	98-12 min, dissolved	0.0000005	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80792	158-18 min, dissolved	0.0000006	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80793	218-24 min, dissolved	0.0000007	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80794	278-30 min, dissolved	0.0000014	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80692	38-6 min, total	0.0000019	0.0000010	0.0000010	0.0000030	0.0000010	0.0000010	0.00000074
Water	80693	98-12 min, total	0.0000019	0.0000010	0.0000010	0.0000028	0.0000010	0.0000010	0.00000100
Water	80694	158-18 min, total	0.0000043	0.0000010	0.0000010	0.0000048	0.0000010	0.0000010	0.00000140
Water	80695	218-24 min, total	0.0000034	0.0000011	0.0000011	0.0000055	0.0000011	0.0000011	0.00000110
Water	80696	278-30 min, total	0.0000029	0.0000010	0.0000010	0.0000036	0.0000010	0.0000010	0.00000100
		Hopper Overflow Monitoring							
Water	80795	28-4 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80796	68-8 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80797	108-12 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80798	148-16 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80799	188-20 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80698	2& 4 min, total	0.0000018	0.0000010	0.0000010	0.0000026	0.0000010	0.0000010	0.00000100
Water	80699	6& 8 min, total	0.0000013	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80700	108-12 min, total	0.0000011	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	80701	148-16 min, total	0.0000020	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110
Water	80702	188-20 min, total	0.0000015	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
		Site Water							
Water	81594	Sample 1 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	81595	Sample 2 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	81596	Sample 3 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
		Elutriate							
Water	81600	Sample 1 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	81601	Sample 2 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	81602	Sample 3 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	81597	Sample 1 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	81598	Sample 2 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
Water	81599	Sample 3 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 138	PCB 141	PCB 151	PCB 153	PCB 156	PCB 167	PCB 170
		Detection Limit (mg/kg)	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
		In situ Sediment							
Sediment	81714	Sample #1	0.00033						
Sediment	81715	Sample #2	0.00033						
Sediment	81716	Sample #3	0.00033						
BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.									

PCBscoar									
Delaware River Water Analysis (Coarse-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 171	PCB 180	PCB 182	PCB 183	PCB 185	PCB 187	PCB 189
		Detection Limit (mg/l)	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80834	Plume Monitoring Background, dissolved	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80749	Background, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80835	0-10 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80836	10-20 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80837	20-30 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80750	0-10 min, overflow, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80751	10-20 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80752	20-30 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80838	0-10 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80839	10-20 min, non-overflow, dissolve	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80840	20-30 min, non-overflow, dissolve	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80753	0-10 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80754	10-20 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80755	20-30 min, non-overflow, total	0.0000011	0.0000011	0.0000011	0.0000010	0.0000011	0.0000011	0.0000029
		Hopper Inflow Monitoring							
Water	80790	3& 6 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80791	9&12 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80792	15&18 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80793	21&24 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80794	27&30 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80692	3& 6 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000021	0.0000010
Water	80693	9&12 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000017	0.0000010
Water	80694	15&18 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000033	0.0000010
Water	80695	21&24 min, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80696	27&30 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Hopper Overflow Monitoring							
Water	80795	2& 4 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80796	6& 8 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80797	10&12 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80798	14&16 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80799	18&20 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80698	2& 4 min, total	0.0000010	0.0000015	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80699	6& 8 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80700	10&12 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80701	14&16 min, total	0.0000011	0.0000024	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80702	18&20 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Site Water							
Water	81594	Sample 1 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81595	Sample 2 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81596	Sample 3 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Elutriate							
Water	81600	Sample 1 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81601	Sample 2 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81602	Sample 3 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81597	Sample 1 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81598	Sample 2 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81599	Sample 3 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 171	PCB 180	PCB 182	PCB 183	PCB 185	PCB 187	PCB 189
		Detection Limit (mg/kg)	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
		In situ Sediment							
Sediment	81714	Sample #1	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81715	Sample #2	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81716	Sample #3	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.									

PCBscoar									
Delaware River Water Analysis (Coarse-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 191	PCB 194	PCB 195	PCB 196	PCB 201	PCB 203	PCB 205
		Detection Limit (mg/l)	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80834	Plume Monitoring							
Water	80749	Background, dissolved	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80749	Background, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80835	0-10 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80836	10-20 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80837	20-30 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80750	0-10 min, overflow, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80751	10-20 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80752	20-30 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80838	0-10 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80839	10-20 min, non-overflow, dissolve	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80840	20-30 min, non-overflow, dissolve	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80753	0-10 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80754	10-20 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80755	20-30 min, non-overflow, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
		Hopper Inflow Monitoring							
Water	80790	3& 6 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80791	9&12 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80792	15&18 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80793	21&24 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80794	27&30 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80692	3& 6 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80693	9&12 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80694	15&18 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80695	21&24 min, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80696	27&30 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Hopper Overflow Monitoring							
Water	80795	2& 4 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80796	6& 8 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80797	10&12 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80798	14&16 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80799	18&20 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80698	2& 4 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80699	6& 8 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80700	10&12 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80701	14&16 min, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80702	18&20 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Site Water							
Water	81594	Sample 1 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81595	Sample 2 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81596	Sample 3 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Elutriate							
Water	81600	Sample 1 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81601	Sample 2 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81602	Sample 3 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81597	Sample 1 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81598	Sample 2 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81599	Sample 3 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 191	PCB 194	PCB 195	PCB 196	PCB 201	PCB 203	PCB 205
		Detection Limit (mg/kg)	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
		In situ Sediment							
Sediment	81714	Sample #1	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81715	Sample #2	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
Sediment	81716	Sample #3	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033	0.00033
BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.									

PCBscoar

Delaware River Water Analysis (Coarse-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 206	PCB 207	PCB 208	PCB 209	PCB 66	PCB 190	PCB 198
		Detection Limit (mg/l)	0.0000011	0.00000110	0.00000110		0.0000011	0.0000011	0.0000011
Water	80834	Plume Monitoring							
Water	80749	Background, dissolved	0.0000020	0.00000040	0.00000080	110.02%	0.0000011	0.0000011	0.0000011
Water	80749	Background, total	0.0000015	0.00000100	0.00000060	95.61%	0.0000010	0.0000010	0.0000010
Water	80835	0-10 min, overflow, dissolved	0.0000017	0.00000100	0.00000050	100.35%	0.0000010	0.0000010	0.0000010
Water	80836	10-20 min, overflow, dissolved	0.0000018	0.00000100	0.00000080	110.93%	0.0000010	0.0000010	0.0000010
Water	80837	20-30 min, overflow, dissolved	0.0000020	0.00000100	0.00000060	109.27%	0.0000010	0.0000010	0.0000010
Water	80750	0-10 min, overflow, total	0.0000017	0.00000110	0.00000070	96.69%	0.0000011	0.0000011	0.0000011
Water	80751	10-20 min, overflow, total	0.0000017	0.00000100	0.00000050	89.46%	0.0000010	0.0000010	0.0000010
Water	80752	20-30 min, overflow, total	0.0000017	0.00000100	0.00000060	99.52%	0.0000010	0.0000010	0.0000010
Water	80838	0-10 min, non-overflow, dissolve	0.0000020	0.00000100	0.00000070	111.00%	0.0000010	0.0000010	0.0000010
Water	80839	10-20 min, non-overflow, dissolve	0.0000019	0.00000110	0.00000080	109.59%	0.0000011	0.0000011	0.0000011
Water	80840	20-30 min, non-overflow, dissolve	0.0000022	0.00000110	0.00000070	105.27%	0.0000011	0.0000011	0.0000011
Water	80753	0-10 min, non-overflow, total	0.0000017	0.00000100	0.00000060	94.00%	0.0000010	0.0000010	0.0000010
Water	80754	10-20 min, non-overflow, total	0.0000016	0.00000100	0.00000050	92.43%	0.0000010	0.0000010	0.0000010
Water	80755	20-30 min, non-overflow, total	0.0000017	0.00000110	0.00000060	103.87%	0.0000011	0.0000011	0.0000011
		Hopper Inflow Monitoring							
Water	80790	3& 6 min, dissolved	0.0000016	0.00000100	0.00000060	102.69%	0.0000010	0.0000010	0.0000010
Water	80791	9&12 min, dissolved	0.0000015	0.00000100	0.00000050	93.31%	0.0000010	0.0000010	0.0000010
Water	80792	15&18 min, dissolved	0.0000014	0.00000100	0.00000050	83.49%	0.0000010	0.0000010	0.0000010
Water	80793	21&24 min, dissolved	0.0000013	0.00000100	0.00000100	83.82%	0.0000010	0.0000010	0.0000010
Water	80794	27&30 min, dissolved	0.0000013	0.00000100	0.00000040	74.65%	0.0000011	0.0000010	0.0000010
Water	80692	3& 6 min, total	0.0000013	0.00000100	0.00000100	75.42%	0.0000010	0.0000010	0.0000010
Water	80693	9&12 min, total	0.0000015	0.00000100	0.00000040	83.26%	0.0000010	0.0000010	0.0000010
Water	80694	15&18 min, total	0.0000019	0.00000100	0.00000100	74.76%	0.0000010	0.0000010	0.0000010
Water	80695	21&24 min, total	0.0000022	0.00000130	0.00000048	77.49%	0.0000011	0.0000011	0.0000011
Water	80696	27&30 min, total	0.0000018	0.00000150	0.00000064	61.74%	0.0000010	0.0000010	0.0000010
		Hopper Overflow Monitoring							
Water	80795	2& 4 min, dissolved	0.0000016	0.00000100	0.00000050	97.89%	0.0000010	0.0000010	0.0000010
Water	80796	6& 8 min, dissolved	0.0000017	0.00000100	0.00000050	99.86%	0.0000010	0.0000010	0.0000010
Water	80797	10&12 min, dissolved	0.0000017	0.00000100	0.00000050	100.24%	0.0000010	0.0000010	0.0000010
Water	80798	14&16 min, dissolved	0.0000017	0.00000100	0.00000050	105.68%	0.0000010	0.0000010	0.0000010
Water	80799	18&20 min, dissolved	0.0000017	0.00000100	0.00000050	105.68%	0.0000010	0.0000010	0.0000010
Water	80698	2& 4 min, total	0.0000016	0.00000100	0.00000055	60.08%	0.0000010	0.0000010	0.0000010
Water	80699	6& 8 min, total	0.0000015	0.00000100	0.00000100	51.08%	0.0000010	0.0000010	0.0000010
Water	80700	10&12 min, total	0.0000031	0.00000100	0.00000100	145.37%	0.0000010	0.0000010	0.0000010
Water	80701	14&16 min, total	0.0000020	0.00000110	0.00000110	98.00%	0.0000011	0.0000011	0.0000011
Water	80702	18&20 min, total	0.0000016	0.00000100	0.00000100	88.00%	0.0000010	0.0000010	0.0000010
		Site Water							
Water	81594	Sample 1 Total	0.0000026	0.00000110	0.00000130	95.54%	0.0000010	0.0000010	0.0000010
Water	81595	Sample 2 Total	0.0000027	0.00000100	0.00000140	100.33%	0.0000010	0.0000010	0.0000010
Water	81596	Sample 3 Total	0.0000024	0.00000085	0.00000120	98.44%	0.0000010	0.0000010	0.0000010
		Elutriate							
Water	81600	Sample 1 Dissolved	0.0000025	0.00000088	0.00000140	110.94%	0.0000010	0.0000010	0.0000010
Water	81601	Sample 2 Dissolved	0.0000022	0.00000083	0.00000120	92.51%	0.0000010	0.0000010	0.0000010
Water	81602	Sample 3 Dissolved	0.0000024	0.00000066	0.00000110	98.83%	0.0000010	0.0000010	0.0000010
Water	81597	Sample 1 Total	0.0000022	0.00000064	0.00000110	97.19%	0.0000010	0.0000010	0.0000010
Water	81598	Sample 2 Total	0.0000021	0.00000051	0.00000097	100.67%	0.0000010	0.0000010	0.0000010
Water	81599	Sample 3 Total	0.0000022	0.00000100	0.00000110	103.83%	0.0000010	0.0000010	0.0000010
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 206	PCB 207	PCB 208	PCB 209	PCB 66	PCB 190	PCB 198
		Detection Limit (mg/kg)	0.00033	0.00033	0.00033		0.00033	0.00033	0.00033
		Insitu Sediment							
Sediment	81714	Sample #1	0.00019	0.00033	0.00015	109.80%	0.00033	0.00033	0.00033
Sediment	81715	Sample #2	0.00044	0.00033	0.00033	109.30%	0.00033	0.00033	0.00033
Sediment	81716	Sample #3	0.00020	0.00033	0.00015	106.21%	0.00033	0.00033	0.00033

BOLD - less than values
Values below less than values are estimated results. Results are less than the reporting limit.

PCBscoar

Delaware River Water Analysis (Coarse-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 200
		Detection Limit (mg/l)	0.0000011
		Plume Monitoring	
Water	80834	Background, dissolved	0.0000011
Water	80749	Background, total	0.0000010
Water	80835	0-10 min, overflow, dissolved	0.0000010
Water	80836	10-20 min, overflow, dissolved	0.0000010
Water	80837	20-30 min, overflow, dissolved	0.0000010
Water	80750	0-10 min, overflow, total	0.0000011
Water	80751	10-20 min, overflow, total	0.0000010
Water	80752	20-30 min, overflow, total	0.0000010
Water	80838	0-10 min, non-overflow, dissolve	0.0000010
Water	80839	10-20 min, non-overflow, dissolve	0.0000011
Water	80840	20-30 min, non-overflow, dissolve	0.0000011
Water	80753	0-10 min, non-overflow, total	0.0000010
Water	80754	10-20 min, non-overflow, total	0.0000010
Water	80755	20-30 min, non-overflow, total	0.0000011
		Hopper Inflow Monitoring	
Water	80790	3& 6 min, dissolved	0.0000010
Water	80791	9812 min, dissolved	0.0000010
Water	80792	15818 min, dissolved	0.0000010
Water	80793	21&24 min, dissolved	0.0000010
Water	80794	27830 min, dissolved	0.0000010
Water	80692	3& 6 min, total	0.0000010
Water	80693	9812 min, total	0.0000010
Water	80694	15818 min, total	0.0000010
Water	80695	21&24 min, total	0.0000011
Water	80696	27&30 min, total	0.0000010
		Hopper Overflow Monitoring	
Water	80795	2& 4 min, dissolved	0.0000010
Water	80796	6& 8 min, dissolved	0.0000010
Water	80797	10812 min, dissolved	0.0000010
Water	80798	14816 min, dissolved	0.0000010
Water	80799	18820 min, dissolved	0.0000010
Water	80698	2& 4 min, total	0.0000010
Water	80699	6& 8 min, total	0.0000010
Water	80700	10812 min, total	0.0000010
Water	80701	14816 min, total	0.0000011
Water	80702	18820 min, total	0.0000010
		Site Water	
Water	81594	Sample 1 Total	0.0000010
Water	81595	Sample 2 Total	0.0000010
Water	81596	Sample 3 Total	0.0000010
		Elutriate	
Water	81600	Sample 1 Dissolved	0.0000010
Water	81601	Sample 2 Dissolved	0.0000010
Water	81602	Sample 3 Dissolved	0.0000010
Water	81597	Sample 1 Total	0.0000010
Water	81598	Sample 2 Total	0.0000010
Water	81599	Sample 3 Total	0.0000010
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 200
		Detection Limit (mg/kg)	0.00033
		Insitu Sediment	
Sediment	81714	Sample #1	0.00033
Sediment	81715	Sample #2	0.00033
Sediment	81716	Sample #3	0.00033

BOLD - less than values

Values below less than values are estimated results. Results are less than the reporting limit.

Delaware River Water Analysis (Coarse-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	TSS						TS mg/l
		Detection Limit (mg/l)	4.0						4
Water	81134	Plume Monitoring Background	10 min	20 min	30 min	40 min	50 min		
Water	81135	TSS Top Depth	8.5	28.0	7.5	25.0	8.0		
Water	81137	TSS Mid-Depth	10.0	10.0	9.5	9.0			
Water	81137	TSS Bottom Depth	12.5	11.0	31.5	13.0			
Water	81179	Plume Monitoring Non-Overflow	1 min	3 min	5 min	7 min	9 min	12 min	20 min
Water	81180	TSS Top Depth	11.5	12.0	10.5	10.0	9.5	12.0	30 min
Water	81181	TSS Mid-Depth	12.5	16.0	10.0	11.0	11.0	12.0	12.0
Water	81181	TSS Bottom Depth	10.5	17.5	15.5	12.0	27.0	21.0	28.0
Water	81149	Plume Monitoring Overflow	1 min	3 min	5 min	7 min	9 min	12 min	25 min
Water	81150	TSS Top Depth	8.0	8.0	6.0	24.5	10.5	9.0	15.5
Water	81150	TSS Mid-Depth	8.5	32.0	10.5	10.0	10.0	12.5	20.0
Water	81151	TSS Bottom Depth	13.5	26.0	12.5	12.0	12.5	18.0	19.0
Water	81314	Hopper Inflow	3 min	6 min	9 min	12 min	15 min	18 min	27 min
Water	81314	TSS (mg/l)	1840	1890	1310	1220	640	1300	26160
		Hopper Contents Beginning of Overflow	Location 1 Location 2 Location 3						
Water	81334	TSS Top Depth	14000	870	1827				
Water	81335	TSS Mid-Depth	6470	1290	1395				
Water	81336	TSS Bottom Depth	2880	1300	1600				
		Hopper Contents End of Overflow	Location 1 Location 2 Location 3						
Water	81343	TSS Top Depth	690	837	1290				
Water	81344	TSS Mid-Depth	807	14810	303				
Water	81345	TSS Bottom Depth	633	867	657				
Water	81004	Hopper Overflow	0.5 min	1.0 min	1.5 min	2.0 min	2.5 min	3.0 min	4.5 min
Water	81004	TSS (mg/l)	928	920	982	2808	836	862	800
Water	81014	Hopper Overflow	5.5 min	6.0 min	6.5 min	7.0 min	7.5 min	8.0 min	8.5 min
Water	81024	Hopper Overflow	986	970	970	690	800	1046	790
Water	81024	TSS (mg/l)	932	638	634	772	954	732	688
Water	81034	Hopper Overflow	10.5 min	11.0 min	11.5 min	12.0 min	12.5 min	13.0 min	13.5 min
Water	81034	TSS (mg/l)	722	894	1424	1078	914	1112	2090
		TSS	Site Water Sample 1 T Sample 2 T Sample 3 T						
Water	81666	Site Water	38						TS
Water	81667	Sample 1 Total	22						
Water	81668	Sample 2 Total	22						
		Sample 3 Total	22						
		Elutriate							Elutriate
Water	81672	Sample 1 Dissolved	11						Sample 1 D
Water	81673	Sample 2 Dissolved	16						Sample 2 D
Water	81674	Sample 3 Dissolved	9						Sample 3 D
Water	81669	Sample 1 Total	59						Sample 1 T
Water	81670	Sample 2 Total	32						Sample 2 T
Water	81671	Sample 3 Total	21						Sample 3 T
									31016

nutcoar

Delaware River Water Analysis (Coarse-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	TOC
		Detection Limit (mg/l)	3.00
		Plume Monitoring	
Water	80820	Background, dissolved	5.67
Water	80728	Background, total	8.00
Water	80821	0-10 min, overflow, dissolved	8.98
Water	80822	10-20 min, overflow, dissolved	11.30
Water	80823	20-30 min, overflow, dissolved	9.35
Water	80729	0-10 min, overflow, total	7.92
Water	80730	10-20 min, overflow, total	7.59
Water	80731	20-30 min, overflow, total	8.86
Water	80824	0-10 min, non-overflow, dissolved	10.20
Water	80825	10-20 min, non-overflow, dissolved	10.30
Water	80826	20-30 min, non-overflow, dissolved	10.10
Water	80732	0-10 min, non-overflow, total	6.80
Water	80733	10-20 min, non-overflow, total	10.30
Water	80734	20-30 min, non-overflow, total	8.52
		Hopper Inflow Monitoring	
Water	80770	3& 6 min, dissolved	14.80
Water	80771	9812 min, dissolved	3.45
Water	80772	15&18 min, dissolved	13.50
Water	80773	21&24 min, dissolved	14.50
Water	80774	27&30 min, dissolved	16.20
Water	80656	38 6 min, total	216.00
Water	80657	9812 min, total	46.80
Water	80658	15818 min, total	16.50
Water	80659	21824 min, total	28.60
Water	80660	27&30 min, total	54.20
		Hopper Overflow Monitoring	
Water	80775	28 4 min, dissolved	12.40
Water	80776	68 8 min, dissolved	11.20
Water	80777	10812 min, dissolved	13.80
Water	80778	14816 min, dissolved	11.80
Water	80779	18820 min, dissolved	16.60
Water	80662	28 4 min, total	41.90
Water	80663	68 8 min, total	4.56
Water	80664	10812 min, total	12.10
Water	80665	14816 min, total	70.00
Water	80666	18820 min, total	59.40
		Site Water	
Water	81684	Sample 1 Total	5.12
Water	81685	Sample 2 Total	1.21
Water	81686	Sample 3 Total	3.00
		Elutriate	
Water	81690	Sample 1 Dissolved	1.07
Water	81691	Sample 2 Dissolved	3.00
Water	81692	Sample 3 Dissolved	3.00
Water	81687	Sample 1 Total	1.32
Water	81688	Sample 2 Total	3.00
Water	81689	Sample 3 Total	3.00
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	TOC
		Detection Limit (mg/kg)	3.0
		In situ Sediment	
Sediment	81720	Sample #1	174.0
Sediment	81721	Sample #2	155.0
Sediment	81722	Sample #3	170.0

BOLD - less than values
 Values below less than values are estimated results. Results are less than the reporting limit.

spgrcoar

Delaware River Water Analysis (Coarse-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	Sp. Gr.	%Moisture
Insitu Sediment				
Sediment	81209	Sample #1	2.71	22.57%
Sediment	81210	Sample #2	2.70	25.39%
Sediment	81211	Sample #3	2.71	22.00%
Sediment	81212	Sample #4	2.71	23.83%
Sediment	81213	Sample #5	2.71	21.04%
Sediment	81214	Sample #6	2.72	20.33%
Sediment	81215	Sample #7	2.71	20.06%
Sediment	81216	Sample #8	2.72	21.82%
Sediment	81217	Sample #9	2.72	21.30%
Sediment	81218	Sample #10	2.72	19.87%
Sediment	81219	Sample #11	2.74	23.49%
Sediment	81220	Sample #12	2.74	20.47%
Sediment	81221	Sample #13	2.73	23.70%
Sediment	81222	Sample #14	2.74	20.90%
Sediment	81223	Sample #15	2.73	21.95%
			Average	21.91%

Metsfine										
Delaware River Water Analysis (Fine-Grained Site)										
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	SB	AS	BE	CD	CR	CU	PB	HG
		Detection Limit (mg/l)	0.0030	0.002	0.002	0.0002	0.002	0.001	0.0010	0.0002
Water	80976	Plume Monitoring								
Water	80934	Background, dissolved	0.0030	0.007	0.001	0.0002	0.002	0.004	0.0045	0.0002
Water	80934	Background, total	0.0030	0.011	0.001	0.0002	0.006	0.004	0.0060	0.0002
Water	80977	0-10 min, overflow, dissolved	0.0030	0.006	0.001	0.0002	0.002	0.001	0.0010	0.0002
Water	80978	10-20 min, overflow, dissolved	0.0030	0.006	0.001	0.0002	0.002	0.001	0.0010	0.0002
Water	80979	20-30 min, overflow, dissolved	0.0030	0.006	0.001	0.0002	0.002	0.003	0.0010	0.0002
Water	80935	0-10 min, overflow, total	0.0030	0.011	0.001	0.0002	0.019	0.009	0.0190	0.0002
Water	80936	10-20 min, overflow, total	0.0030	0.013	0.001	0.0002	0.018	0.008	0.0160	0.0002
Water	80937	20-30 min, overflow, total	0.0030	0.011	0.001	0.0002	0.012	0.004	0.0100	0.0002
Water	80980	0-10 min, non-overflow, dissolved	0.0030	0.008	0.001	0.0002	0.002	0.003	0.0010	0.0002
Water	80981	10-20 min, non-overflow, dissolved	0.0030	0.008	0.001	0.0002	0.002	0.003	0.0017	0.0002
Water	80982	20-30 min, non-overflow, dissolved	0.0030	0.008	0.001	0.0002	0.002	0.001	0.0010	0.0002
Water	80938	0-10 min, non-overflow, total	0.0030	0.011	0.001	0.0002	0.004	0.001	0.0020	0.0002
Water	90939	10-20 min, non-overflow, total	0.0030	0.010	0.001	0.0002	0.004	0.008	0.0030	0.0002
Water	80940	20-30 min, non-overflow, total	0.0030	0.011	0.001	0.0002	0.003	0.005	0.0030	0.0002
Water	81094	Hopper Inflow Monitoring								
Water	81095	3& 6 min, dissolved	0.0030	0.009	0.001	0.0002	0.002	0.001	0.0015	0.0002
Water	81096	9&12 min, dissolved	0.0030	0.019	0.001	0.0002	0.002	0.001	0.0017	0.0002
Water	81096	15&18 min, dissolved	0.0030	0.023	0.001	0.0002	0.002	0.001	0.0011	0.0002
Water	81097	21&24 min, dissolved	0.0030	0.009	0.001	0.0002	0.002	0.001	0.0011	0.0002
Water	81098	27&30 min, dissolved	0.0030	0.019	0.001	0.0002	0.002	0.001	0.0010	0.0002
Water	80867	3& 6 min, total	0.0156	0.392	0.040	0.0206	1.810	1.080	1.7800	0.0019
Water	80868	9&12 min, total	0.0504	0.844	0.088	0.0527	3.980	2.520	4.4000	0.0182
Water	80869	15&18 min, total	0.0870	1.470	0.140	0.0974	6.550	4.120	7.7500	0.0422
Water	80870	21&24 min, total	0.0288	0.528	0.056	0.0376	2.510	1.580	2.6800	0.0110
Water	80871	27&30 min, total	0.1090	1.990	0.210	0.1750	9.600	6.900	12.0000	0.0578
Water	81099	Hopper Overflow Monitoring								
Water	81100	2& 4 min, dissolved	0.0030	0.009	0.001	0.0002	0.002	0.001	0.0012	0.0002
Water	81100	6& 8 min, dissolved	0.0030	0.009	0.001	0.0002	0.002	0.001	0.0010	0.0002
Water	81101	10&12 min, dissolved	0.0030	0.008	0.001	0.0002	0.002	0.001	0.0011	0.0002
Water	81102	14&16 min, dissolved	0.0030	0.010	0.001	0.0002	0.002	0.001	0.0016	0.0002
Water	81103	18&20 min, dissolved	0.0030	0.010	0.001	0.0002	0.002	0.001	0.0010	0.0002
Water	80873	2& 4 min, total	0.0895	1.460	0.145	0.0061	6.700	4.410	7.9500	0.0354
Water	80874	6& 8 min, total	0.0950	1.440	0.140	0.0055	6.640	4.300	7.9000	0.0281
Water	80875	10&12 min, total	0.0840	1.290	0.130	0.0899	6.000	4.000	6.0500	0.0244
Water	80876	14&16 min, total	0.0905	1.640	0.160	0.1260	7.550	5.100	7.6000	0.0360
Water	80877	18&20 min, total	0.0815	1.600	0.160	0.1170	7.450	4.980	7.9500	0.0372
Water	81657	Site Water								
Water	81657	Sample 1 Total	0.0030	0.010	0.001	0.0002	0.005	0.005	0.0040	0.0002
Water	81658	Sample 2 Total	0.0030	0.009	0.001	0.0002	0.004	0.004	0.0060	0.0002
Water	81659	Sample 3 Total	0.0030	0.002	0.001	0.0002	0.004	0.001	0.0010	0.0002
Water	81663	Elutriate								
Water	81663	Sample 1 Dissolved	0.0030	0.011	0.001	0.0002	0.002	0.002	0.0010	0.0002
Water	81664	Sample 2 Dissolved	0.0030	0.010	0.001	0.0002	0.002	0.002	0.0010	0.0002
Water	81665	Sample 3 Dissolved	0.0030	0.009	0.001	0.0002	0.002	0.003	0.0010	0.0002
Water	81660	Sample 1 Total	0.0030	0.015	0.001	0.0002	0.024	0.007	0.0140	0.0002
Water	81661	Sample 2 Total	0.0030	0.014	0.001	0.0002	0.025	0.007	0.0140	0.0002
Water	81662	Sample 3 Total	0.0030	0.014	0.001	0.0002	0.024	0.009	0.0130	0.0002
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	SB	AS	BE	CD	CR	CU	PB	HG
		Detection Limit (mg/kg)	0.30	0.2	0.1	0.020	0.2	0.1	1.0	0.020
		In situ Sediment								
Sediment	81729	Sample #1	0.36	10.3	0.9	0.300	41.4	16.2	32.1	0.154
Sediment	81730	Sample #2	0.49	10.7	0.9	0.310	42.2	16.8	34.2	0.152
Sediment	81731	Sample #3	0.37	10.1	0.8	0.280	41.0	16.2	32.4	0.166
SB - Antimony	AS - Arsenic	BE - Beryllium	CD - Cadmium	CR - Chromium	CU - Copper	PB - Lead	HG - Mercury			
Values below less than values are estimated results. Results are less than the reporting limit.										

Metsfine

Delaware River Water Analysis (Fine-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	NI	SE	AG	TL	ZN	AL	BA	CA
		Detection Limit (mg/l)	0.001	0.002	0.001	0.0020	0.010	0.025	0.002	0.200
Water	80976	Plume Monitoring	0.001	0.019	0.001	0.0020	0.053	0.025	0.223	70.2
Water	80934	Background, dissolved	0.004	0.025	0.001	0.0020	0.071	2.900	0.050	67.4
Water	80977	Background, total								
Water	80978	0-10 min, overflow, dissolved	0.001	0.013	0.001	0.0020	0.014	0.025	0.094	57.1
Water	80979	10-20 min, overflow, dissolved	0.001	0.013	0.001	0.0020	0.013	0.025	0.086	58.3
Water	80979	20-30 min, overflow, dissolved	0.001	0.014	0.001	0.0020	0.013	0.025	0.089	53.1
Water	80935	0-10 min, overflow, total	0.007	0.019	0.001	0.0020	0.059	7.920	0.061	56.5
Water	80936	10-20 min, overflow, total	0.008	0.023	0.001	0.0020	0.060	7.640	0.065	57.7
Water	80937	20-30 min, overflow, total	0.004	0.021	0.001	0.0020	0.036	5.140	0.048	53.8
Water	80980	0-10 min, non-overflow, dissolved	0.001	0.021	0.001	0.0020	0.058	0.025	0.245	70.9
Water	80981	10-20 min, non-overflow, dissolved	0.001	0.023	0.001	0.0021	0.046	0.025	0.193	69.6
Water	80982	20-30 min, non-overflow, dissolved	0.001	0.021	0.001	0.0020	0.048	0.025	0.207	70.8
Water	80938	0-10 min, non-overflow, total	0.001	0.027	0.001	0.0020	0.013	1.800	0.170	70.6
Water	90939	10-20 min, non-overflow, total	0.003	0.027	0.001	0.0020	0.017	2.160	0.040	67.6
Water	80940	20-30 min, non-overflow, total	0.003	0.028	0.001	0.0020	0.010	1.790	0.038	66.1
		Hopper Inflow Monitoring								
Water	81094	38-6 min, dissolved	0.003	0.015	0.001	0.0020	0.074	0.025	0.435	82.7
Water	81095	98-12 min, dissolved	0.004	0.015	0.002	0.0020	0.084	0.092	0.549	93.8
Water	81096	158-18 min, dissolved	0.005	0.014	0.001	0.0020	0.076	0.033	0.529	111.0
Water	81097	218-24 min, dissolved	0.003	0.014	0.001	0.0020	0.057	0.028	0.380	73.4
Water	81098	278-30 min, dissolved	0.005	0.015	0.001	0.0020	0.089	0.025	0.636	108.0
Water	80867	38-6 min, total	0.912	0.068	0.004	0.0110	5.880	744.0	3.000	178.0
Water	80868	98-12 min, total	1.950	0.116	0.076	0.0160	13.300	1856.0	6.440	392.0
Water	80869	158-18 min, total	3.240	0.180	0.098	0.0310	21.400	3320.0	10.200	640.0
Water	80870	218-24 min, total	1.270	0.084	0.044	0.0110	8.760	1110.0	4.200	241.0
Water	80871	278-30 min, total	4.750	0.255	0.150	0.0540	34.800	5440.0	16.800	1000.0
		Hopper Overflow Monitoring								
Water	81099	28-4 min, dissolved	0.005	0.015	0.001	0.0020	0.145	0.025	0.607	117.0
Water	81100	68-8 min, dissolved	0.005	0.015	0.001	0.0020	0.157	0.025	0.713	121.0
Water	81101	108-12 min, dissolved	0.005	0.015	0.001	0.0020	0.130	0.025	0.748	112.0
Water	81102	148-16 min, dissolved	0.005	0.013	0.001	0.0020	0.138	0.025	0.749	119.0
Water	81103	188-20 min, dissolved	0.004	0.013	0.002	0.0020	0.085	0.025	0.551	116.0
Water	80873	28-4 min, total	3.350	0.010	0.007	0.0020	23.400	3450.0	11.000	590.0
Water	80874	68-8 min, total	3.310	0.010	0.005	0.0020	22.900	3080.0	10.700	615.0
Water	80875	108-12 min, total	3.030	0.141	0.053	0.0230	21.200	2860.0	10.000	565.0
Water	80876	148-16 min, total	3.820	0.195	0.114	0.0340	27.100	3930.0	12.800	745.0
Water	80877	188-20 min, total	3.760	0.191	0.078	0.0360	26.800	3740.0	12.500	760.0
		Site Water								
Water	81657	Sample 1 Total	0.002	0.026	0.003	0.0020	0.019	2.330	0.043	59.7
Water	81658	Sample 2 Total	0.003	0.024	0.002	0.0020	0.019	2.060	0.042	60.7
Water	81659	Sample 3 Total	0.001	0.002	0.002	0.0020	0.018	2.340	0.042	60.2
		Elutriate								
Water	81663	Sample 1 Dissolved	0.003	0.028	0.001	0.0020	0.073	0.185	0.280	65.8
Water	81664	Sample 2 Dissolved	0.002	0.024	0.001	0.0020	0.075	0.118	0.209	67.6
Water	81665	Sample 3 Dissolved	0.002	0.021	0.002	0.0020	0.076	0.105	0.214	66.1
Water	81660	Sample 1 Total	0.011	0.030	0.002	0.0020	0.075	12.900	0.104	61.3
Water	81661	Sample 2 Total	0.011	0.028	0.002	0.0020	0.074	13.200	0.107	62.8
Water	81662	Sample 3 Total	0.012	0.030	0.002	0.0020	0.072	13.000	0.113	61.9
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	NI	SE	AG	TL	ZN	AL	BA	CA
		Detection Limit (mg/kg)	0.5	0.20	0.100	0.200	1	1	0.1	20
		In situ Sediment								
Sediment	81729	Sample #1	21.7	1.60	0.700	0.200	131	13300	51.4	2180
Sediment	81730	Sample #2	22.2	1.60	0.700	0.200	133	13800	53.5	2260
Sediment	81731	Sample #3	21.5	1.70	0.649	0.200	130	13000	51.7	2230

NI - Nickel SE - Selenium AG - Silver TL - Thallium ZN - Zinc AL - Aluminum BA - Barium CA - Calcium
 BOLD - less than values
 Values below less than values are estimated results. Results are less than the reporting limit.

Metsfine								
Delaware River Water Analysis (Fine-Grained Site)								
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	CO	FE	MG	MN	K	NA
		Detection Limit (mg/l)	0.002	0.020	0.200	0.001	0.20	0.20
		Plume Monitoring						
Water	80976	Background, dissolved	0.001	0.020	180	0.002	56.4	1540
Water	80934	Background, total	0.001	2.420	162	0.118	49.6	1350
Water	80977	0-10 min, overflow, dissolved	0.001	0.020	121	0.062	41.8	1030
Water	80978	10-20 min, overflow, dissolved	0.001	0.020	116	0.027	41.1	973
Water	80979	20-30 min, overflow, dissolved	0.001	0.020	112	0.010	36.4	942
Water	80935	0-10 min, overflow, total	0.002	9.710	120	0.465	37.6	916
Water	80936	10-20 min, overflow, total	0.002	9.260	121	0.450	38.5	920
Water	80937	20-30 min, overflow, total	0.001	5.730	109	0.278	34.0	857
Water	80980	0-10 min, non-overflow, dissolved	0.001	0.027	179	0.011	57.8	1570
Water	80981	10-20 min, non-overflow, dissolved	0.001	0.020	171	0.011	55.6	1520
Water	80982	20-30 min, non-overflow, dissolved	0.001	0.020	160	0.005	55.7	1380
Water	80938	0-10 min, non-overflow, total	0.001	1.420	180	0.073	54.9	1470
Water	90939	10-20 min, non-overflow, total	0.001	1.820	175	0.098	53.8	1370
Water	80940	20-30 min, non-overflow, total	0.001	1.140	159	0.061	48.8	1280
		Hopper Inflow Monitoring						
Water	81094	3& 6 min, dissolved	0.002	0.928	150	7.600	45.1	1240
Water	81095	9&12 min, dissolved	0.004	6.850	144	9.200	38.9	1030
Water	81096	15&18 min, dissolved	0.006	10.200	148	11.200	36.1	1030
Water	81097	21&24 min, dissolved	0.004	0.467	123	3.840	40.0	1060
Water	81098	27&30 min, dissolved	0.006	11.600	127	6.920	33.6	940
Water	80867	3& 6 min, total	0.480	1,180.0	370	58.0	160.0	1070
Water	80868	9&12 min, total	1.030	2,860.0	725	132.0	289.0	1104
Water	80869	15&18 min, total	1.700	5,130.0	1180	244.0	451.0	1060
Water	80870	21&24 min, total	0.684	1,630.0	476	74.8	188.0	1020
Water	80871	27&30 min, total	2.510	9,200.0	1830	412.0	700.0	970
		Hopper Overflow Monitoring						
Water	81099	2& 4 min, dissolved	0.004	2.930	151	9.580	32.9	1000
Water	81100	6& 8 min, dissolved	0.004	3.600	153	9.500	33.4	1030
Water	81101	10&12 min, dissolved	0.005	5.980	133	7.310	32.3	956
Water	81102	14&16 min, dissolved	0.006	10.900	140	6.460	30.0	932
Water	81103	18&20 min, dissolved	0.006	6.410	133	6.810	32.5	895
Water	80873	2& 4 min, total	1.760	4,750.0	1,040	225.0	474.0	885
Water	80874	6& 8 min, total	1.740	2,700.0	1,060	224.0	389.0	970
Water	80875	10&12 min, total	1.620	4,160.0	965	197.0	415.0	960
Water	80876	14&16 min, total	2.030	5,600.0	1,205	265.0	520.0	930
Water	80877	18&20 min, total	1.980	6,150.0	1,320	287.0	510.0	960
		Site Water						
Water	81657	Sample 1 Total	0.002	2.420	135	0.120	39.80	1130
Water	81658	Sample 2 Total	0.002	2.370	134	0.121	36.90	1140
Water	81659	Sample 3 Total	0.002	2.470	133	0.119	38.30	1130
		Elutriate						
Water	81663	Sample 1 Dissolved	0.003	0.043	146	8.280	40.40	1140
Water	81664	Sample 2 Dissolved	0.002	0.042	153	8.100	40.40	1180
Water	81665	Sample 3 Dissolved	0.002	0.037	144	8.310	36.40	1160
Water	81660	Sample 1 Total	0.008	12,900	61	8.160	36.70	1060
Water	81661	Sample 2 Total	0.008	13,200	140	8.360	37.70	1060
Water	81662	Sample 3 Total	0.008	13,000	136	8.430	33.00	1020
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	CO	FE	MG	MN	K	NA
		Detection Limit (mg/kg)	0.1	2	20	0.1	20	20
		In situ Sediment						
Sediment	81729	Sample #1	11.1	25,300	5,050	1,070.0	2,290	2110
Sediment	81730	Sample #2	11.2	26,200	5,120	1,130.0	2,380	2160
Sediment	81731	Sample #3	11.0	25,200	5,070	1,120.0	2,350	2140
CO - Cobalt	FE - Iron	MG - Magnesium	MN - Manganese	K - Potassium	NA - Sodium	V - Vanadium		
		BOLD - less than values						
		Values below less than values are estimated results. Results are less than the reporting limit.						

PAHs fine									
Delaware River Water Analysis (Fine-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	NAPHTH	ACENAY	ACENAP	FLUORE	PHENAN	ANTRAC	FLANTHE
		Detection Limit (mg/l)	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80997	Plume Monitoring							
Water	80962	Background, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80962	Background, total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80998	0-10 min, overflow, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80999	10-20 min, overflow, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81000	20-30 min, overflow, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80963	0-10 min, overflow, total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80964	10-20 min, overflow, total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80965	20-30 min, overflow, total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81001	0-10 min, non-overflow, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81002	10-20 min, non-overflow, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81003	20-30 min, non-overflow, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80966	0-10 min, non-overflow, total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80967	10-20 min, non-overflow, total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80968	20-30 min, non-overflow, total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81124	Hopper Inflow Monitoring							
Water	81125	3& 6 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81126	9&12 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81127	15&18 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81128	21&24 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80915	27&30 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80916	3& 6 min, total	0.00043	0.00030	0.00030	0.00014	0.00054	0.00031	0.00221
Water	80917	9&12 min, total	0.00110	0.00030	0.00029	0.00057	0.00349	0.00103	0.00758
Water	80918	15&18 min, total	0.00057	0.00030	0.00017	0.00036	0.00217	0.00061	0.00484
Water	80919	21&24 min, total	0.00053	0.00030	0.00012	0.00023	0.00158	0.00048	0.00370
Water	80920	27&30 min, total	0.00183	0.00015	0.00047	0.00085	0.00582	0.00183	0.01320
Water	81129	Hopper Overflow Monitoring							
Water	81130	2& 4 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81131	6& 8 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81132	10&12 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81133	14&16 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80921	18&20 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80922	2& 4 min, total	0.00120	0.00011	0.00031	0.00051	0.00377	0.00104	0.00900
Water	80923	6& 8 min, total	0.00121	0.00012	0.00042	0.00068	0.00529	0.00311	0.01260
Water	80924	10&12 min, total	0.00062	0.00030	0.00020	0.00054	0.00325	0.00083	0.00838
Water	80925	14&16 min, total	0.00052	0.00030	0.00015	0.00047	0.00267	0.00074	0.00657
Water	80926	18&20 min, total	0.00257	0.00023	0.00073	0.00124	0.00923	0.00259	0.02030
Water	81639	Site Water							
Water	81640	Sample 1 Total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81641	Sample 2 Total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81641	Sample 3 Total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81645	Elutriate							
Water	81646	Sample 1 Dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81647	Sample 2 Dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81647	Sample 3 Dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81642	Sample 1 Total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00012
Water	81643	Sample 2 Total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00011
Water	81644	Sample 3 Total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00010
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	NAPHTH	ACENAY	ACENAP	FLUORE	PHENAN	ANTRAC	FLANTHE
		Detection Limit (mg/kg)	0.0220	0.022	0.022	0.022	0.0220	0.0220	0.022
In situ Sediment									
Sediment	81705	Sample #1	0.0640	0.022	0.022	0.015	0.0921	0.0367	0.188
Sediment	81706	Sample #2	0.0591	0.022	0.022	0.014	0.0800	0.0303	0.126
Sediment	81707	Sample #3	0.0581	0.022	0.022	0.015	0.0828	0.0327	0.136
NAPHTH - Naphthalene	ACENAY - Acenaphthylene	ACENAP - Acenaphthene	FLUORE - Fluorene	PHENAN - Phenanthrene					
ANTRAC - Anthracene	FLANTHE - Fluoranthene								
BOLD - less than values									
Values below less than values									
Estimated results.									
Results are less than the reporting limit.									

PAHs fine									
Delaware River Water Analysis (Fine-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PYRENE	CHRYSE	BAANTHR	BBFLANT	BKFLANT	BAPYRE	I123PYR
Detection Limit (mg/l)			0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80997	Plume Monitoring							
Water	80962	Background, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80962	Background, total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80998	0-10 min, overflow, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80999	10-20 min, overflow, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81000	20-30 min, overflow, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80963	0-10 min, overflow, total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80964	10-20 min, overflow, total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80965	20-30 min, overflow, total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81001	0-10 min, non-overflow, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81002	10-20 min, non-overflow, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81003	20-30 min, non-overflow, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80966	0-10 min, non-overflow, total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80967	10-20 min, non-overflow, total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80968	20-30 min, non-overflow, total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Hopper Inflow Monitoring									
Water	81124	3& 6 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81125	9&12 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81126	15&18 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81127	21&24 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81128	27&30 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80915	3& 6 min, total	0.00227	0.00159	0.00118	0.00177	0.00120	0.00088	0.00309
Water	80916	9&12 min, total	0.00782	0.00547	0.00451	0.00492	0.00385	0.00519	0.00549
Water	80917	15&18 min, total	0.00465	0.00341	0.00276	0.00371	0.00227	0.00360	0.00436
Water	80918	21&24 min, total	0.00364	0.00256	0.00204	0.00236	0.00183	0.00246	0.00255
Water	80919	27&30 min, total	0.01400	0.00948	0.00841	0.00785	0.00629	0.00838	0.00701
Hopper Overflow Monitoring									
Water	81129	2& 4 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81130	6& 8 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81131	10&12 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81132	14&16 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81133	18&20 min, dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	80921	2& 4 min, total	0.00903	0.00642	0.00576	0.00548	0.00433	0.00614	0.00542
Water	80922	6& 8 min, total	0.01270	0.00907	0.00868	0.00823	0.00614	0.00838	0.00741
Water	80923	10&12 min, total	0.00711	0.00643	0.00543	0.00653	0.00438	0.00596	0.00579
Water	80924	14&16 min, total	0.00611	0.00566	0.00472	0.00555	0.00437	0.00019	0.00547
Water	80925	18&20 min, total	0.02000	0.01380	0.01290	0.01160	0.00953	0.01220	0.01050
Site Water									
Water	81639	Sample 1 Total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81640	Sample 2 Total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81641	Sample 3 Total	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Elutriate									
Water	81645	Sample 1 Dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81646	Sample 2 Dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81647	Sample 3 Dissolved	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81642	Sample 1 Total	0.00010	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81643	Sample 2 Total	0.00010	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
Water	81644	Sample 3 Total	0.00009	0.00030	0.00030	0.00030	0.00030	0.00030	0.00030
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PYRENE	CHRYSE	BAANTHR	BBFLANT	BKFLANT	BAPYRE	I123PYR
Detection Limit (mg/kg)			0.022	0.022	0.0220	0.0220	0.0220	0.0220	0.0220
In situ Sediment									
Sediment	81705	Sample #1	0.196	0.145	0.1290	0.0871	0.1090	0.1120	0.0899
Sediment	81706	Sample #2	0.146	0.107	0.0865	0.0742	0.0850	0.0793	0.0699
Sediment	81707	Sample #3	0.150	0.108	0.0858	0.0770	0.0727	0.0828	0.0749
PYRENE - Pyrene CHRYSE - Chrysene BAANTHR - Benzo(a)Anthracene BBFLANT - Benzo(b)Fluoranthene BKFPLANT - Benzo(k)Fluoranthene BAPYRE - Benzo(a)Pyrene I123PYR - Indeno(1,2,3-C,D)Pyrene									
BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.									

PAHsfine

Delaware River Water Analysis (Plume Monitoring)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	DBAHANT	B-GHI-PY	2MeNAPH	2FIBP-S	PTERP-S
		Detection Limit (mg/l)	0.00030	0.00030	0.00030		
Water	80997	Plume Monitoring Background, dissolved	0.00030	0.00030	0.00030	56.0%	84.1%
Water	80962	Background, total	0.00030	0.00030	0.00030	73.2%	85.1%
Water	80998	0-10 min, overflow, dissolved	0.00030	0.00030	0.00030	64.7%	87.3%
Water	80999	10-20 min, overflow, dissolved	0.00030	0.00030	0.00030	83.0%	87.8%
Water	81000	20-30 min, overflow, dissolved	0.00030	0.00030	0.00030	65.1%	81.5%
Water	80963	0-10 min, overflow, total	0.00030	0.00030	0.00030	63.2%	79.3%
Water	80964	10-20 min, overflow, total	0.00030	0.00030	0.00030	63.4%	85.5%
Water	80965	20-30 min, overflow, total	0.00030	0.00030	0.00030	58.7%	88.4%
Water	81001	0-10 min, non-overflow, dissolved	0.00030	0.00030	0.00030	69.4%	84.7%
Water	81002	10-20 min, non-overflow, dissolved	0.00030	0.00030	0.00030	63.4%	87.5%
Water	81003	20-30 min, non-overflow, dissolved	0.00030	0.00030	0.00030	61.6%	86.0%
Water	80966	0-10 min, non-overflow, total	0.00030	0.00030	0.00030	66.5%	91.6%
Water	80967	10-20 min, non-overflow, total	0.00030	0.00030	0.00030	68.1%	88.6%
Water	80968	20-30 min, non-overflow, total	0.00030	0.00030	0.00030	87.1%	90.5%
		Hopper Inflow Monitoring					
Water	81124	3& 6 min, dissolved	0.00030	0.00030	0.00030	72.4%	85.9%
Water	81125	98.12 min, dissolved	0.00030	0.00030	0.00030	43.8%	80.7%
Water	81126	158.18 min, dissolved	0.00030	0.00030	0.00030	51.7%	80.2%
Water	81127	218.24 min, dissolved	0.00030	0.00030	0.00030	62.9%	88.0%
Water	81128	278.30 min, dissolved	0.00030	0.00030	0.00030	62.0%	83.8%
Water	80915	3& 6 min, total	0.00019	0.00167	0.00029	58.2%	48.6%
Water	80916	98.12 min, total	0.00231	0.00424	0.00068	68.6%	60.4%
Water	80917	158.18 min, total	0.00217	0.00312	0.00038	64.5%	60.7%
Water	80918	218.24 min, total	0.00111	0.00197	0.00035	57.9%	51.3%
Water	80919	278.30 min, total	0.00169	0.00629	0.00116	67.5%	53.6%
		Hopper Overflow Monitoring					
Water	81129	2& 4 min, dissolved	0.00030	0.00030	0.00030	62.8%	83.2%
Water	81130	6& 8 min, dissolved	0.00030	0.00030	0.00030	76.4%	82.0%
Water	81131	108.12 min, dissolved	0.00030	0.00030	0.00030	47.2%	65.7%
Water	81132	148.16 min, dissolved	0.00030	0.00030	0.00030	70.7%	71.0%
Water	81133	188.20 min, dissolved	0.00030	0.00030	0.00030	46.2%	66.7%
Water	80921	2& 4 min, total	0.00153	0.00460	0.00073	69.1%	58.1%
Water	80922	6& 8 min, total	0.00204	0.00607	0.00076	67.1%	62.3%
Water	80923	108.12 min, total	0.00175	0.00473	0.00037	41.5%	59.6%
Water	80924	148.16 min, total	0.00165	0.00431	0.00030	36.4%	61.5%
Water	80925	188.20 min, total	0.00240	0.00883	0.00163	66.5%	61.5%
		Site Water					
Water	81639	Sample 1 Total	0.00030	0.00030	0.00030	50.6%	61.9%
Water	81640	Sample 2 Total	0.00030	0.00030	0.00030	60.2%	62.4%
Water	81641	Sample 3 Total	0.00030	0.00030	0.00030	46.3%	66.8%
		Elutriate					
Water	81645	Sample 1 Dissolved	0.00030	0.00030	0.00030	43.3%	67.8%
Water	81646	Sample 2 Dissolved	0.00030	0.00030	0.00030	83.7%	56.1%
Water	81647	Sample 3 Dissolved	0.00030	0.00030	0.00030	28.2%	58.3%
Water	81642	Sample 1 Total	0.00030	0.00030	0.00030	62.7%	64.0%
Water	81643	Sample 2 Total	0.00030	0.00030	0.00030	56.7%	71.0%
Water	81644	Sample 3 Total	0.00030	0.00030	0.00030	65.9%	71.2%
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	DBAHANT	B-GHI-PY	2MeNAPH	2FIBP-S	PTERP-S
		Detection Limit (mg/kg)	0.0220	0.0220	0.0220		
		In situ Sediment					
Sediment	81705	Sample #1	0.0086	0.0748	0.0353	60.3%	48.6%
Sediment	81706	Sample #2	0.0072	0.0605	0.0324	63.0%	49.1%
Sediment	81707	Sample #3	0.0087	0.0647	0.0342	61.2%	51.1%

DBAHANT - Dibenzo(A,H)Anthracene B-GHI-PY - Benzo(G,H,I)Perylene 2MeNAPH - 2-Methylnaphthalene

2FIBP-S - 2-Fluorobiphenyl(Surrogate (43-116 W)) PTERP-S - p-Terphenyl-D14(Surrogate (33-141 W))

BOLD = less than values

Values below less than values are estimated results. Results are less than the reporting limit.

Pestfine

Delaware River Water Analysis (Fine-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	ALDRIN	A-BHC	B-BHC	G-BHC	D-BHC	PPDDD
		Detection Limit (mg/l)	0.000028	0.000028	0.000028	0.000028	0.000028	0.000055
Plume Monitoring								
Water	80990	Background, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80955	Background, total	0.000028	0.000028	0.000028	0.000028	0.000028	0.000055
Water	80991	0-10 min, overflow, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80992	10-20 min, overflow, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80993	20-30 min, overflow, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80956	0-10 min, overflow, total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80957	10-20 min, overflow, total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80958	20-30 min, overflow, total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80994	0-10 min, non-overflow, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80995	10-20 min, non-overflow, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80996	20-30 min, non-overflow, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80959	0-10 min, non-overflow, total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80960	10-20 min, non-overflow, total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80961	20-30 min, non-overflow, total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Hopper Inflow Monitoring								
Water	81114	3& 6 min, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	81115	9&12 min, dissolved	0.000026	0.000026	0.000026	0.000026	0.000026	0.000052
Water	81116	15&18 min, dissolved	0.000027	0.000027	0.000027	0.000027	0.000027	0.000054
Water	81117	21&24 min, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	81118	27&30 min, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	80903	3& 6 min, total	0.000016	0.000025	0.000025	0.000025	0.000025	0.000120
Water	80904	9&12 min, total	0.000024	0.000025	0.000025	0.000025	0.000025	0.000160
Water	80905	15&18 min, total	0.000024	0.000027	0.000027	0.000027	0.000027	0.000200
Water	80906	21&24 min, total	0.000022	0.000027	0.000027	0.000014	0.000027	0.000130
Water	80907	27&30 min, total	0.000026	0.000025	0.000025	0.000025	0.000025	0.000130
Hopper Overflow Monitoring								
Water	81119	2& 4 min, dissolved	0.000026	0.000026	0.000026	0.000026	0.000026	0.000052
Water	81120	6& 8 min, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	81121	10&12 min, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	81122	14&16 min, dissolved	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	81123	18&20 min, dissolved	0.000024	0.000024	0.000024	0.000024	0.000024	0.000049
Water	80909	2& 4 min, total	0.000030	0.000027	0.000027	0.000010	0.000027	0.000740
Water	80910	6& 8 min, total	0.000045	0.000027	0.000027	0.000027	0.000027	0.000300
Water	80911	10&12 min, total	Broken	Broken	Broken	Broken	Broken	Broken
Water	80912	14&16 min, total	0.000062	0.000025	0.000025	0.000015	0.000025	0.000540
Water	80913	18&20 min, total	0.000043	0.000027	0.000027	0.000027	0.000027	0.000320
Site Water								
Water	81621	Sample 1 Total	0.000025	0.000025	0.000025	0.000017	0.000025	0.000050
Water	81622	Sample 2 Total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	81623	Sample 3 Total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Elutriate								
Water	81627	Sample 1 Dissolved	0.000050	0.000050	0.000050	0.000050	0.000050	0.000100
Water	81628	Sample 2 Dissolved	0.000050	0.000050	0.000050	0.000050	0.000050	0.000100
Water	81629	Sample 3 Dissolved	0.000050	0.000050	0.000050	0.000050	0.000050	0.000100
Water	81624	Sample 1 Total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000050
Water	81625	Sample 2 Total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000016
Water	81626	Sample 3 Total	0.000025	0.000025	0.000025	0.000025	0.000025	0.000015
SAMPLE	SAMPLE	DESCRIPTION	ALDRIN	A-BHC	B-BHC	G-BHC	D-BHC	PPDDD
		Detection Limit (mg/kg)	0.0018	0.0018	0.00096	0.0018	0.0018	0.0019
Insitu Sediment								
Sediment	81711	Sample #1	0.0018	0.0018	0.00067	0.0018	0.0018	0.0063
Sediment	81712	Sample #2	0.0018	0.0018	0.00062	0.0018	0.0018	0.0054
Sediment	81713	Sample #3	0.0018	0.0018	0.00092	0.0018	0.0018	0.0210

ALDRIN - Aldrin A-BHC - A-BHC B-BHC - B-BHC G-BHC - G-BHC D-BHC - D-BHC PPDDD - PPDDD

BOLD - less than values

Values below less than values are estimated results. Results are less than the reporting limit.

Pestfine

Delaware River Water Analysis (Fine-Grained Site)

SAMPLE TYPE	DESCRIPTION	PPDDE	PPDDT	HPTCL	DIELDRIN	ENDOI	ENDOII
	Detection Limit (mg/l)	0.000055	0.000055	0.0000280	0.000055	0.000028	0.000055
	Plume Monitoring						
Water	80990 Background, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050
Water	80955 Background, total	0.000055	0.000055	0.0000280	0.000055	0.000028	0.000055
Water	80991 0-10 min, overflow, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050
Water	80992 10-20 min, overflow, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050
Water	80993 20-30 min, overflow, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050
Water	80956 0-10 min, overflow, total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050
Water	80957 10-20 min, overflow, total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050
Water	80958 20-30 min, overflow, total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050
Water	80994 0-10 min, non-overflow, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050
Water	80995 10-20 min, non-overflow, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050
Water	80996 20-30 min, non-overflow, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050
Water	80959 0-10 min, non-overflow, total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050
Water	80960 10-20 min, non-overflow, total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050
Water	80961 20-30 min, non-overflow, total	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050
	Hopper Inflow Monitoring						
Water	81114 3& 6 min, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050
Water	81115 9&12 min, dissolved	0.000052	0.000052	0.0000260	0.000052	0.000026	0.000052
Water	81116 15&18 min, dissolved	0.000054	0.000054	0.0000270	0.000054	0.000027	0.000054
Water	81117 21&24 min, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050
Water	81118 27&30 min, dissolved	0.000050	0.000050	0.0000250	0.000050	0.000025	0.000050
Water	80903 3& 6 min, total	0.000079	0.000050	0.0000250	0.000050	0.000025	0.000050
Water	80904 9&12 min, total	0.000010	0.000082	0.0000130	0.000050	0.000029	0.000050
Water	80905 15&18 min, total	0.0000150	0.000050	0.0000130	0.000053	0.000033	0.000053
Water	80906 21&24 min, total	0.0000120	0.000075	0.0000207	0.000053	0.000032	0.000053
Water	80907 27&30 min, total	0.0000110	0.000068	0.0000290	0.000050	0.000032	0.000050
	Hopper Overflow Monitoring						
Water	81119 2& 4 min, dissolved	0.000052	0.000052	0.0000260	0.000052	0.000026	0.000052
Water	81120 6& 8 min, dissolved	0.000050	0.000066	0.0000250	0.000050	0.000025	0.000050
Water	81121 10&12 min, dissolved	0.000050	0.000069	0.0000250	0.000050	0.000025	0.000050
Water	81122 14&16 min, dissolved	0.000050	0.000065	0.0000250	0.000050	0.000025	0.000050
Water	81123 18&20 min, dissolved	0.000049	0.000049	0.0000240	0.000049	0.000024	0.000049
Water	80909 2& 4 min, total	0.0000190	0.0000110	0.0000170	0.000053	0.000017	0.000053
Water	80910 6& 8 min, total	0.0000180	0.0000360	0.0000270	0.000053	0.000050	0.000053
Water	80911 10&12 min, total	Broken	Broken	Broken	Broken	Broken	Broken
Water	80912 14&16 min, total	0.0000470	0.0000340	0.0000280	0.000050	0.000033	0.000050
Water	80913 18&20 min, total	0.0000300	0.0000140	0.0000270	0.000053	0.000020	0.000053
	Site Water						
Water	81621 Sample 1 Total	0.000050	0.000050	0.0000037	0.000050	0.000025	0.000050
Water	81622 Sample 2 Total	0.000050	0.000050	0.0000340	0.000050	0.000025	0.000050
Water	81623 Sample 3 Total	0.000050	0.000050	0.0000370	0.000050	0.000025	0.000050
	Elutriate						
Water	81627 Sample 1 Dissolved	0.000100	0.000100	0.0000170	0.000100	0.000050	0.000100
Water	81628 Sample 2 Dissolved	0.000100	0.000100	0.0000180	0.000100	0.000050	0.000100
Water	81629 Sample 3 Dissolved	0.000100	0.000100	0.0000190	0.000100	0.000050	0.000100
Water	81624 Sample 1 Total	0.000050	0.000050	0.0000130	0.000050	0.000025	0.000050
Water	81625 Sample 2 Total	0.000050	0.000050	0.0000350	0.000050	0.000025	0.000050
Water	81626 Sample 3 Total	0.000050	0.000050	0.0000330	0.000050	0.000025	0.000050

SAMPLE	SAMPLE	DESCRIPTION	PPDDE	PPDDT	HPTCL	DIELDRIN	ENDOI	ENDOII
		Detection Limit (mg/kg)	0.0019	0.0019	0.00096	0.0036	0.00096	0.0036
		Insitu Sediment						
Sediment	81711	Sample #1	0.0061	0.0120	0.00058	0.0036	0.0030	0.0055
Sediment	81712	Sample #2	0.0110	0.0059	0.00038	0.0036	0.0030	0.0036
Sediment	81713	Sample #3	0.0075	0.0120	0.00051	0.0036	0.0030	0.0036

PPDDE - PPDDE PPDDT - PPDDT HPTCL - Heptachlor DIELDRIN - Dieldrin ENDOI - A-Endosulfan ENDOII - B-Endosulfan
 BOLD - less than values
 Values below less than values are estimated results. Results are less than the reporting limit.

Pestfine							
Delaware River Water Analysis (Fine-Grained Site)							
SAMPLE TYPE	DESCRIPTION	ENDOSU	ENDRIN	ENDALD	HPTCLE	METOXYCL	CLORDANE
	Detection Limit (mg/l)	0.000055	0.000050	0.000055	0.000028	0.000028	0.000028
Water	80990 Plume Monitoring	0.000050	0.000050	0.000050	0.000025	0.000025	0.000025
Water	80955 Background, dissolved	0.000055	0.000110	0.000055	0.000028	0.000028	0.000028
Water	80991 0-10 min, overflow, dissolved	0.000050	0.000050	0.000050	0.000025	0.000025	0.000025
Water	80992 10-20 min, overflow, dissolved	0.000050	0.000050	0.000050	0.000025	0.000025	0.000025
Water	80993 20-30 min, overflow, dissolved	0.000050	0.000050	0.000050	0.000025	0.000025	0.000025
Water	80956 0-10 min, overflow, total	0.000050	0.000110	0.000050	0.000025	0.000025	0.000025
Water	80957 10-20 min, overflow, total	0.000050	0.000120	0.000050	0.000025	0.000025	0.000025
Water	80958 20-30 min, overflow, total	0.000050	0.000100	0.000050	0.000025	0.000025	0.000025
Water	80994 0-10 min, non-overflow, dissolved	0.000050	0.000050	0.000050	0.000025	0.000025	0.000025
Water	80995 10-20 min, non-overflow, dissolved	0.000050	0.000110	0.000050	0.000025	0.000025	0.000025
Water	80996 20-30 min, non-overflow, dissolved	0.000050	0.000110	0.000050	0.000025	0.000025	0.000025
Water	80959 0-10 min, non-overflow, total	0.000050	0.000100	0.000050	0.000025	0.000025	0.000025
Water	80960 10-20 min, non-overflow, total	0.000050	0.000120	0.000050	0.000025	0.000025	0.000025
Water	80961 20-30 min, non-overflow, total	0.000050	0.000130	0.000050	0.000025	0.000025	0.000025
Water	Hopper Inflow Monitoring						
Water	81114 3& 6 min, dissolved	0.000050	0.000081	0.000050	0.000025	0.000025	0.000025
Water	81115 9&12 min, dissolved	0.000052	0.000061	0.000052	0.000026	0.000026	0.000026
Water	81116 15&18 min, dissolved	0.000054	0.000060	0.000054	0.000027	0.000027	0.000027
Water	81117 21&24 min, dissolved	0.000050	0.000081	0.000050	0.000025	0.000025	0.000025
Water	81118 27&30 min, dissolved	0.000050	0.000069	0.000050	0.000025	0.000025	0.000025
Water	80903 3& 6 min, total	0.000022	0.000050	0.000050	0.000013	0.000025	
Water	80904 9&12 min, total	0.000050	0.000050	0.000050	0.000025	0.000025	
Water	80905 15&18 min, total	0.000047	0.000053	0.000053	0.000027	0.000027	
Water	80906 21&24 min, total	0.000041	0.000053	0.000053	0.000027	0.000027	
Water	80907 27&30 min, total	0.000050	0.000050	0.000050	0.000025	0.000025	
Water	Hopper Overflow Monitoring						
Water	81119 2& 4 min, dissolved	0.000052	0.000095	0.000052	0.000026	0.000026	0.000026
Water	81120 6& 8 min, dissolved	0.000050	0.000079	0.000050	0.000025	0.000025	0.000025
Water	81121 10&12 min, dissolved	0.000050	0.000085	0.000050	0.000025	0.000025	0.000025
Water	81122 14&16 min, dissolved	0.000050	0.000063	0.000050	0.000025	0.000025	0.000025
Water	81123 18&20 min, dissolved	0.000049	0.000055	0.000049	0.000024	0.000024	0.000024
Water	80909 2& 4 min, total	0.000053	0.000053	0.000053	0.000014	0.000027	
Water	80910 6& 8 min, total	0.000053	0.000053	0.000053	0.000027	0.000027	
Water	80911 10&12 min, total		Broken	Broken	Broken	Broken	Broken
Water	80912 14&16 min, total	0.000140	0.000050	0.000050	0.000020	0.000025	
Water	80913 18&20 min, total	0.000053	0.000053	0.000053	0.000027	0.000027	
Water	Site Water						
Water	81621 Sample 1 Total	0.000050	0.000050	0.000050	0.000025	0.000025	
Water	81622 Sample 2 Total	0.000050	0.000050	0.000050	0.000025	0.000025	
Water	81623 Sample 3 Total	0.000050	0.000050	0.000050	0.000025	0.000025	
Water	Elutriate						
Water	81627 Sample 1 Dissolved	0.000100	0.000100	0.000100	0.000050	0.000050	
Water	81628 Sample 2 Dissolved	0.000100	0.000100	0.000100	0.000050	0.000050	
Water	81629 Sample 3 Dissolved	0.000100	0.000100	0.000100	0.000050	0.000050	
Water	81624 Sample 1 Total	0.000050	0.000050	0.000050	0.000025	0.000025	
Water	81625 Sample 2 Total	0.000050	0.000050	0.000050	0.000025	0.000025	
Water	81626 Sample 3 Total	0.000050	0.000050	0.000050	0.000025	0.000025	
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	ENDOSU	ENDRIN	ENDALD	HPTCLE	METOXYCL
		Detection Limit (mg/kg)	0.0036	0.0036	0.0036	0.0018	0.018
Sediment	81711 In situ Sediment	0.0036	0.0036	0.0036	0.0018	0.018	
Sediment	81712 Sample #2	0.0019	0.0036	0.0036	0.0018	0.018	
Sediment	81713 Sample #3	0.0036	0.0036	0.0036	0.0018	0.018	
ENDOSU - Endosulfan sulfate		ENDRIN - Endrin	ENDALD - Endrin Aldehyde	HPTCLE - Heptachlor Epoxide		METOXYCL - Methoxychlor	
Values below less than values are estimated results. Results are less than the reporting limit.							

Pestfine

Delaware River Water Analysis (Fine-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	TOXAPHEN	TcLXYL-S	DCLBP	a-CHLORD	g-CHLORD
		Detection Limit (mg/l)	0.00028		0.000025	0.000025	
Plume Monitoring							
Water	80990	Background, dissolved	0.00025	83.00%	92.60%		
Water	80955	Background, total	0.00028	87.40%	72.90%		
Water	80991	0-10 min, overflow, dissolved	0.00025	75.70%	92.20%		
Water	80992	10-20 min, overflow, dissolved	0.00025	75.10%	81.70%		
Water	80993	20-30 min, overflow, dissolved	0.00025	73.20%	83.20%		
Water	80956	0-10 min, overflow, total	0.00025	83.50%	70.90%		
Water	80957	10-20 min, overflow, total	0.00025	92.40%	72.10%		
Water	80958	20-30 min, overflow, total	0.00025	74.40%	63.90%		
Water	80994	0-10 min, non-overflow, dissolved	0.00025	73.30%	84.10%		
Water	80995	10-20 min, non-overflow, dissolved	0.00025	79.50%	87.40%		
Water	80996	20-30 min, non-overflow, dissolved	0.00025	73.40%	84.10%		
Water	80959	0-10 min, non-overflow, total	0.00025	82.40%	75.20%		
Water	80960	10-20 min, non-overflow, total	0.00025	86.80%	79.50%		
Water	80961	20-30 min, non-overflow, total	0.00025	82.30%	80.60%		
Hopper Inflow Monitoring							
Water	81114	3& 6 min, dissolved	0.00025	80.80%	78.00%		
Water	81115	9&12 min, dissolved	0.00026	82.20%	75.20%		
Water	81116	15&18 min, dissolved	0.00027	82.10%	73.50%		
Water	81117	21&24 min, dissolved	0.00025	95.30%	85.80%		
Water	81118	27&30 min, dissolved	0.00025	91.60%	80.70%		
Water	80903	3& 6 min, total	0.00025	35.50%	45.20%	0.000034	0.000026
Water	80904	9&12 min, total	0.00025	31.64%	43.66%	0.000043	0.000032
Water	80905	15&18 min, total	0.00027	39.39%	59.50%	0.000052	0.000032
Water	80906	21&24 min, total	0.00027	44.21%	59.72%	0.000046	0.000029
Water	80907	27&30 min, total	0.00025	44.04%	41.07%	0.000043	0.000025
Hopper Overflow Monitoring							
Water	81119	2& 4 min, dissolved	0.00026	88.10%	80.40%		
Water	81120	6& 8 min, dissolved	0.00025	92.10%	76.20%		
Water	81121	10&12 min, dissolved	0.00025	91.70%	81.80%		
Water	81122	14&16 min, dissolved	0.00025	72.30%	56.10%		
Water	81123	18&20 min, dissolved	0.00024	73.50%	61.10%		
Water	80909	2& 4 min, total	0.00027	40.11%	58.27%	0.000068	0.000050
Water	80910	6& 8 min, total	0.00027	47.04%	64.93%	0.000069	0.000048
Water	80911	10&12 min, total	Broken	Broken	Broken	Broken	Broken
Water	80912	14&16 min, total	0.00025	48.41%	78.19%	0.000130	0.000093
Water	80913	18&20 min, total	0.00027	44.62%	83.94%	0.000088	0.000059
Site Water							
Water	81621	Sample 1 Total	0.00025	76.88%	68.76%	0.000025	0.000025
Water	81622	Sample 2 Total	0.00025	60.17%	69.83%	0.000025	0.000025
Water	81623	Sample 3 Total	0.00025	71.76%	68.80%	0.000025	0.000025
Elutriate							
Water	81627	Sample 1 Dissolved	0.00050	75.82%	87.54%	0.000050	0.000050
Water	81628	Sample 2 Dissolved	0.00050	85.13%	88.79%	0.000050	0.000050
Water	81629	Sample 3 Dissolved	0.00050	76.31%	87.53%	0.000050	0.000050
Water	81624	Sample 1 Total	0.00025	81.58%	64.33%	0.000025	0.000025
Water	81625	Sample 2 Total	0.00025	60.65%	55.24%	0.000025	0.000025
Water	81626	Sample 3 Total	0.00025	67.60%	61.90%	0.000025	0.000025
SAMPLE	SAMPLE	DESCRIPTION	TOXAPHEN	TcLXYL-S	DCLBP	a-CHLORD	g-CHLORD
		Detection Limit (mg/kg)	0.018			0.00096	0.0019
Insitu Sediment							
Sediment	81711	Sample #1	0.018	86.90%	92.01%	0.0011	0.0035
Sediment	81712	Sample #2	0.018	91.01%	92.77%	0.0016	0.0035
Sediment	81713	Sample #3	0.018	84.77%	102.76%	0.0011	0.0038

TOXAPHEN - Toxaphene TcLXYL-S - 2,4,5,6-Tetrachloro-m-xylene(Surrogate(60-150 WS))

a-CHLORD - a-CHLORDANE g-CHLORD - g-CHLORDANE DCLBP - Decachlorobiphenyl(Surrogate (60-150 WS))

BOLD - less than values

Values below less than values are estimated results. Results are less than the reporting limit.

PCBs fine									
Delaware River Water Analysis (Fine-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 22	PCB 33	PCB 37	PCB 42	PCB 47	PCB 64	PCB 74
		Detection Limit (mg/l)	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110	0.0000011	0.0000011
Water	80983	Plume Monitoring							
Water	80984	Background, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80985	Background, total	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110	0.0000011	0.0000011
Water	80986	0-10 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80987	10-20 min, overflow, dissolved	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110	0.0000011	0.0000011
Water	80988	20-30 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80989	0-10 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80990	10-20 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80991	20-30 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80992	0-10 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80993	10-20 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80994	20-30 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80995	0-10 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80996	10-20 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80997	20-30 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80998	Hopper Inflow Monitoring							
Water	81104	3& 6 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81105	9&12 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81106	15&18 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000050	0.0000010	0.0000010
Water	81107	21&24 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81108	27&30 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80891	3& 6 min, total	0.0000011	0.0000011	0.0000011	0.0000016	0.00000095	0.0000011	0.0000013
Water	80892	9&12 min, total	0.0000010	0.0000010	0.0000010	0.0000031	0.00000180	0.0000092	0.0000042
Water	80893	15&18 min, total	0.0000010	0.0000010	0.0000010	0.0000021	0.00000055	0.0000010	0.0000021
Water	80894	21&24 min, total	0.0000011	0.0000011	0.0000011	0.0000021	0.00000250	0.0000084	0.0000011
Water	80895	27&30 min, total	0.0000011	0.0000011	0.0000011	0.0000038	0.00000110	0.0000011	0.0000011
Water	81109	Hopper Overflow Monitoring							
Water	81110	2& 4 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81111	6& 8 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81112	10&12 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81113	14&16 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80897	18&20 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80898	2& 4 min, total	0.0000011	0.0000011	0.0000011	0.0000046	0.00000830	0.0000011	0.0000011
Water	80899	6& 8 min, total	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110	0.00000150	0.0000061
Water	80900	10&12 min, total	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110	0.00000160	0.0000064
Water	80901	14&16 min, total	0.0000011	0.0000011	0.0000011	0.0000069	0.00000110	0.00000200	0.0000080
Water	81603	18&20 min, total	0.0000010	0.0000010	0.0000010	0.0000058	0.00000100	0.00000190	0.0000074
Water	81604	Site Water							
Water	81603	Sample 1 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81604	Sample 2 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81605	Sample 3 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81609	Elutriate							
Water	81610	Sample 1 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81611	Sample 2 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81612	Sample 3 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81606	Sample 1 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81607	Sample 2 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000057	0.0000010	0.0000010
Water	81608	Sample 3 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000051	0.0000010	0.0000010
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 22	PCB 33	PCB 37	PCB 42	PCB 47	PCB 64	PCB 74
		Detection Limit (mg/kg)	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81717	In situ Sediment	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81718	Sample #1	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81719	Sample #2	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81719	Sample #3	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.									

PCBs fine									
Delaware River Water Analysis (Fine-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 80	PCB 81	PCB 84	PCB 91	PCB 92	PCB 95	PCB 99
		Detection Limit (mg/l)	0.0000011	0.0000011	0.00000110	0.00000110	0.0000011	0.00000110	0.00000110
Water	80983	Plume Monitoring Background, dissolved	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000058	0.00000100
Water	80948	Background, total	0.0000011	0.0000011	0.00000110	0.00000110	0.0000011	0.00000110	0.00000110
Water	80984	0-10 min, overflow, dissolved	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000058	0.00000100
Water	80985	10-20 min, overflow, dissolved	0.0000011	0.0000011	0.00000110	0.00000110	0.0000011	0.00000085	0.00000110
Water	80986	20-30 min, overflow, dissolved	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000049	0.00000100
Water	80949	0-10 min, overflow, total	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000100	0.00000100
Water	80950	10-20 min, overflow, total	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000100	0.00000100
Water	80951	20-30 min, overflow, total	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000100	0.00000100
Water	80987	0-10 min, non-overflow, dissolve	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000049	0.00000100
Water	80988	10-20 min, non-overflow, dissolve	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000120	0.00000100
Water	80989	20-30 min, non-overflow, dissolve	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000056	0.00000100
Water	80952	0-10 min, non-overflow, total	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000100	0.00000100
Water	80953	10-20 min, non-overflow, total	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000100	0.00000100
Water	80954	20-30 min, non-overflow, total	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000100	0.00000100
		Hopper Inflow Monitoring							
Water	81104	3& 6 min, dissolved	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000084	0.00000100
Water	81105	9&12 min, dissolved	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000110	0.00000100
Water	81106	15&18 min, dissolved	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000095	0.00000100
Water	81107	21&24 min, dissolved	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000084	0.00000100
Water	81108	27&30 min, dissolved	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000072	0.00000100
Water	80891	3& 6 min, total	0.0000011	0.0000011	0.00000110	0.00000110	0.0000011	0.00000110	0.00000110
Water	80892	9&12 min, total	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000100	0.00000100
Water	80893	15&18 min, total	0.0000010	0.0000010	0.00000100	0.00000100	0.0000084	0.00000100	0.00000100
Water	80894	21&24 min, total	0.0000011	0.0000011	0.00000110	0.00000320	0.00000068	0.00001200	0.00000730
Water	80895	27&30 min, total	0.0000011	0.0000011	0.00000110	0.00000830	0.0000150	0.00002400	0.00001300
		Hopper Overflow Monitoring							
Water	81109	2& 4 min, dissolved	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000250	0.00000100
Water	81110	6& 8 min, dissolved	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000120	0.00000100
Water	81111	10&12 min, dissolved	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000300	0.00000100
Water	81112	14&16 min, dissolved	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000097	0.00000100
Water	81113	18&20 min, dissolved	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000170	0.00000100
Water	80897	2& 4 min, total	0.0000011	0.0000011	0.00000110	0.00001100	0.0000150	0.00002700	0.00001500
Water	80898	6& 8 min, total	0.0000011	0.0000011	0.00000110	0.0000980	0.0000180	0.00002700	0.00001400
Water	80899	10&12 min, total	0.0000011	0.0000011	0.00000110	0.00001100	0.0000160	0.00003100	0.00001900
Water	80900	14&16 min, total	0.0000011	0.0000011	0.00000110	0.00001400	0.0000250	0.00003700	0.00002100
Water	80901	18&20 min, total	0.0000010	0.0000010	0.00000100	0.00001200	0.0000170	0.00003300	0.00001700
		Site Water							
Water	81603	Sample 1 Total	0.0000010	0.0000010	0.00000100	0.0000046	0.0000010	0.0000093	0.00000100
Water	81604	Sample 2 Total	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000100	0.00000100
Water	81605	Sample 3 Total	0.0000010	0.0000010	0.00000100	0.0000046	0.0000010	0.0000095	0.00000100
		Elutriate							
Water	81609	Sample 1 Dissolved	0.0000010	0.0000010	0.00000100	0.0000054	0.0000010	0.00000110	0.00000038
Water	81610	Sample 2 Dissolved	0.0000010	0.0000010	0.00000100	0.0000068	0.0000010	0.00000094	0.00000047
Water	81611	Sample 3 Dissolved	0.0000010	0.0000010	0.0000091	0.0000093	0.0000010	0.00000057	0.00000028
Water	81606	Sample 1 Total	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000110	0.00000100
Water	81607	Sample 2 Total	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000140	0.00000100
Water	81608	Sample 3 Total	0.0000010	0.0000010	0.00000100	0.00000100	0.0000010	0.00000110	0.00000100
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 80	PCB 81	PCB 84	PCB 91	PCB 92	PCB 95	PCB 99
		Detection Limit (mg/kg)	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
		In situ Sediment							
Sediment	81717	Sample #1	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00046
Sediment	81718	Sample #2	0.00077	0.00077	0.00077	0.00040	0.00049	0.00077	0.00071
Sediment	81719	Sample #3	0.00077	0.00077	0.00077	0.00052	0.00062	0.00077	0.00074
BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.									

PCBs fine									
Delaware River Water Analysis (Fine-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 110	PCB 119	PCB 120	PCB 123	PCB 126	PCB 127	PCB 132
		Detection Limit (mg/l)	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80983	Plume Monitoring							
Water	80948	Background, dissolved	0.00000062	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80948	Background, total	0.00000078	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80984	0-10 min, overflow, dissolved	0.00000060	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80985	10-20 min, overflow, dissolved	0.00000087	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80986	20-30 min, overflow, dissolved	0.00000065	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80949	0-10 min, overflow, total	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80950	10-20 min, overflow, total	0.00000110	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80951	20-30 min, overflow, total	0.00000110	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80987	0-10 min, non-overflow, dissolve	0.00000074	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80988	10-20 min, non-overflow, dissolve	0.00000068	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80989	20-30 min, non-overflow, dissolve	0.00000065	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80952	0-10 min, non-overflow, total	0.00000095	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80953	10-20 min, non-overflow, total	0.00000120	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80954	20-30 min, non-overflow, total	0.00000073	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Hopper Inflow Monitoring							
Water	81104	3& 6 min, dissolved	0.00000095	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81105	9&12 min, dissolved	0.00000068	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81106	15&18 min, dissolved	0.00000076	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81107	21&24 min, dissolved	0.00000090	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81108	27&30 min, dissolved	0.00000076	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80891	3& 6 min, total	0.00000090	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80892	9&12 min, total	0.00000250	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000088
Water	80893	15&18 min, total	0.000001200	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80894	21&24 min, total	0.000001400	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000066
Water	80895	27&30 min, total	0.000002900	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000110
		Hopper Overflow Monitoring							
Water	81109	2& 4 min, dissolved	0.00000095	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81110	6& 8 min, dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81111	10&12 min, dissolved	0.00000120	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81112	14&16 min, dissolved	0.00000095	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81113	18&20 min, dissolved	0.00000110	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80897	2& 4 min, total	0.000003500	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000140
Water	80898	6& 8 min, total	0.000003500	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000230
Water	80899	10&12 min, total	0.000004100	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000150
Water	80900	14&16 min, total	0.000004900	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000300
Water	80901	18&20 min, total	0.000004100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000170
		Site Water							
Water	81603	Sample 1 Total	0.00000077	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81604	Sample 2 Total	0.00000099	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81605	Sample 3 Total	0.00000110	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Elutriate							
Water	81609	Sample 1 Dissolved	0.00000091	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81610	Sample 2 Dissolved	0.00000068	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81611	Sample 3 Dissolved	0.00000057	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81606	Sample 1 Total	0.000000120	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81607	Sample 2 Total	0.000000130	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81608	Sample 3 Total	0.000000110	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 110	PCB 119	PCB 120	PCB 123	PCB 126	PCB 127	PCB 132
		Detection Limit (mg/kg)	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
		In situ Sediment							
Sediment	81717	Sample #1	0.00100	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81718	Sample #2	0.00087	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81719	Sample #3	0.00100	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
<p>BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.</p>									
Page 3									

PCBs fine									
Delaware River Water Analysis (Fine-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 135	PCB 146	PCB 149	PCB 157	PCB 158	PCB 166	PCB 168
		Detection Limit (mg/l)	0.0000011	0.00000110	0.00000110	0.0000011	0.0000011	0.0000011	0.00000110
Water	80983	Plume Monitoring Background, dissolved	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80948	Background, total	0.0000011	0.00000110	0.00000110	0.0000011	0.0000011	0.0000011	0.00000110
Water	80984	0-10 min, overflow, dissolved	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80985	10-20 min, overflow, dissolved	0.0000011	0.00000110	0.00000110	0.0000011	0.0000011	0.0000011	0.00000110
Water	80986	20-30 min, overflow, dissolved	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80949	0-10 min, overflow, total	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80950	10-20 min, overflow, total	0.0000010	0.0000064	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80951	20-30 min, overflow, total	0.0000010	0.0000057	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80987	0-10 min, non-overflow, dissolve	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80988	10-20 min, non-overflow, dissolve	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80989	20-30 min, non-overflow, dissolve	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80952	0-10 min, non-overflow, total	0.0000010	0.00000140	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80953	10-20 min, non-overflow, total	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80954	20-30 min, non-overflow, total	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	81104	Hopper Inflow Monitoring 3& 6 min, dissolved	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	81105	9&12 min, dissolved	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	81106	15&18 min, dissolved	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	81107	21&24 min, dissolved	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	81108	27&30 min, dissolved	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	80891	3& 6 min, total	0.0000011	0.00000260	0.00000100	0.0000011	0.0000011	0.0000011	0.00000110
Water	80892	9&12 min, total	0.0000010	0.00000660	0.00000250	0.0000010	0.0000010	0.0000010	0.00000100
Water	80893	15&18 min, total	0.0000010	0.00000460	0.000001800	0.0000010	0.0000010	0.0000010	0.00000100
Water	80894	21&24 min, total	0.0000011	0.00000110	0.000001800	0.0000011	0.0000011	0.0000011	0.00000110
Water	80895	27&30 min, total	0.0000076	0.00000110	0.000003200	0.0000011	0.0000011	0.0000011	0.00000110
Water	81109	Hopper Overflow Monitoring 2& 4 min, dissolved	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	81110	6& 8 min, dissolved	0.0000010	0.00000100	0.00000043	0.0000010	0.0000010	0.0000010	0.00000100
Water	81111	10&12 min, dissolved	0.0000010	0.00000100	0.00000054	0.0000010	0.0000010	0.0000010	0.00000100
Water	81112	14&16 min, dissolved	0.0000010	0.00000100	0.00000056	0.0000010	0.0000010	0.0000010	0.00000100
Water	81113	18&20 min, dissolved	0.0000010	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.0000040
Water	80897	2& 4 min, total	0.0000088	0.00000110	0.000003600	0.0000011	0.0000011	0.0000011	0.00000110
Water	80898	6& 8 min, total	0.0000083	0.00000110	0.00000110	0.0000011	0.0000011	0.0000011	0.00000110
Water	80899	10&12 min, total	0.0000100	0.00000110	0.00000110	0.0000011	0.0000011	0.0000011	0.00000110
Water	80900	14&16 min, total	0.0000140	0.00000110	0.00000110	0.0000011	0.0000011	0.0000011	0.00000110
Water	80901	18&20 min, total	0.0000150	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100
Water	81603	Site Water Sample 1 Total	0.0000010	0.00000100	0.00000051	0.0000010	0.0000010	0.0000010	0.00000100
Water	81604	Sample 2 Total	0.0000010	0.00000100	0.00000053	0.0000010	0.0000010	0.0000010	0.00000056
Water	81605	Sample 3 Total	0.0000010	0.00000100	0.00000055	0.0000010	0.0000010	0.0000010	0.00000043
Water	81609	Elutriate Sample 1 Dissolved	0.0000010	0.00000100	0.00000047	0.0000010	0.0000010	0.0000010	0.00000140
Water	81610	Sample 2 Dissolved	0.0000010	0.00000100	0.00000046	0.0000010	0.0000010	0.0000010	0.00000100
Water	81611	Sample 3 Dissolved	0.0000010	0.00000100	0.00000044	0.0000010	0.0000010	0.0000010	0.00000100
Water	81606	Sample 1 Total	0.0000010	0.00000100	0.00000091	0.0000010	0.0000010	0.0000010	0.00000100
Water	81607	Sample 2 Total	0.0000010	0.00000100	0.00000090	0.0000010	0.0000010	0.0000010	0.00000100
Water	81608	Sample 3 Total	0.0000010	0.00000100	0.00000076	0.0000010	0.0000010	0.0000010	0.00000100
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 135	PCB 146	PCB 149	PCB 157	PCB 158	PCB 166	PCB 168
		Detection Limit (mg/kg)	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81717	In situ Sediment Sample #1	0.00077	0.00077	0.00120	0.00077	0.00077	0.00077	0.00077
Sediment	81718	Sample #2	0.00077	0.00077	0.00120	0.00077	0.00077	0.00077	0.00077
Sediment	81719	Sample #3	0.00077	0.00077	0.00100	0.00077	0.00077	0.00077	0.00077
BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.									

PCBs fine									
Delaware River Water Analysis (Fine-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 169	PCB 174	PCB 177	PCB 178	PCB 179	PCB 8	PCB 18
		Detection Limit (mg/l)	0.0000011	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80983	Plume Monitoring Background, dissolved	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80948	Background, total	0.0000011	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80984	0-10 min, overflow, dissolved	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80985	10-20 min, overflow, dissolved	0.0000011	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80986	20-30 min, overflow, dissolved	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80949	0-10 min, overflow, total	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80950	10-20 min, overflow, total	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80951	20-30 min, overflow, total	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80987	0-10 min, non-overflow, dissolve	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80988	10-20 min, non-overflow, dissolve	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80989	20-30 min, non-overflow, dissolve	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80952	0-10 min, non-overflow, total	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80953	10-20 min, non-overflow, total	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80954	20-30 min, non-overflow, total	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000015
		Hopper Inflow Monitoring							
Water	81104	3& 6 min, dissolved	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81105	9&12 min, dissolved	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81106	15&18 min, dissolved	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81107	21&24 min, dissolved	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81108	27&30 min, dissolved	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80891	3& 6 min, total	0.0000011	0.00000390	0.0000024	0.0000011	0.0000011	0.0000011	0.0000011
Water	80892	9&12 min, total	0.0000010	0.00000970	0.0000067	0.0000010	0.0000010	0.0000010	0.0000010
Water	80893	15&18 min, total	0.0000010	0.00000620	0.0000042	0.0000010	0.0000010	0.0000010	0.0000010
Water	80894	21&24 min, total	0.0000011	0.00000820	0.0000023	0.0000011	0.0000017	0.0000011	0.0000051
Water	80895	27&30 min, total	0.0000011	0.00000110	0.0000011	0.0000011	0.0000069	0.0000063	0.0000011
		Hopper Overflow Monitoring							
Water	81109	2& 4 min, dissolved	0.0000010	0.00000049	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81110	6& 8 min, dissolved	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81111	10&12 min, dissolved	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81112	14&16 min, dissolved	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81113	18&20 min, dissolved	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80897	2& 4 min, total	0.0000011	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80898	6& 8 min, total	0.0000011	0.00001700	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80899	10&12 min, total	0.0000011	0.00001700	0.0000011	0.0000011	0.0000011	0.0000140	0.0000011
Water	80900	14&16 min, total	0.0000011	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80901	18&20 min, total	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Site Water							
Water	81603	Sample 1 Total	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81604	Sample 2 Total	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81605	Sample 3 Total	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000015
		Elutriate							
Water	81609	Sample 1 Dissolved	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81610	Sample 2 Dissolved	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81611	Sample 3 Dissolved	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81606	Sample 1 Total	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81607	Sample 2 Total	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81608	Sample 3 Total	0.0000010	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 169	PCB 174	PCB 177	PCB 178	PCB 179	PCB 8	PCB 18
		Detection Limit (mg/kg)	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81717	In situ Sediment	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81718	Sample #1	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81719	Sample #2	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81719	Sample #3	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.									
Page 5									

PCBs fine									
Delaware River Water Analysis (Fine-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 28	PCB 31	PCB 40	PCB 44	PCB 49	PCB 52	PCB 60
		Detection Limit (mg/l)	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110	0.00000110	0.00000110
Water	80983	Plume Monitoring							
Water	80983	Background, dissolved	0.0000010	0.0000017	0.0000010	0.0000010	0.00000100	0.00000046	0.00000100
Water	80948	Background, total	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110	0.00000110	0.00000110
Water	80984	0-10 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100
Water	80985	10-20 min, overflow, dissolved	0.0000011	0.0000011	0.0000011	0.0000011	0.00000110	0.00000110	0.00000110
Water	80986	20-30 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100
Water	80949	0-10 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.00000120	0.00000100
Water	80950	10-20 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.00000095	0.00000100
Water	80951	20-30 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.00000077	0.00000100
Water	80987	0-10 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.00000085	0.00000100	0.00000100
Water	80988	10-20 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.00000044	0.00000100	0.00000100
Water	80989	20-30 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100
Water	80952	0-10 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.00000097	0.00000100
Water	80953	10-20 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100
Water	80954	20-30 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.00000074	0.00000100
		Hopper Inflow Monitoring							
Water	81104	3& 6 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.00000083	0.00000100
Water	81105	9812 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.00000093	0.00000100
Water	81106	15818 min, dissolved	0.0000010	0.0000029	0.0000010	0.0000014	0.00000072	0.00000094	0.00000100
Water	81107	21824 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000180	0.00000080	0.00000100
Water	81108	27830 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000046	0.00000070	0.00000100
Water	80891	3& 6 min, total	0.0000067	0.0000011	0.0000011	0.0000057	0.00000410	0.00001100	0.00000040
Water	80892	9812 min, total	0.0000080	0.0000010	0.0000010	0.00000150	0.00000960	0.00002500	0.00000130
Water	80893	15818 min, total	0.0000080	0.0000010	0.0000010	0.0000092	0.00000630	0.00001600	0.00000076
Water	80894	21824 min, total	0.0000067	0.0000011	0.0000041	0.0000080	0.00000600	0.00001500	0.00000075
Water	80895	27830 min, total	0.0000130	0.0000011	0.0000079	0.0000170	0.00001200	0.00002600	0.00000150
		Hopper Overflow Monitoring							
Water	81109	28 4 min, dissolved	0.0000010	0.0000031	0.0000010	0.0000010	0.00000110	0.00000086	0.00000100
Water	81110	6& 8 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000047	0.00000082	0.00000100
Water	81111	10812 min, dissolved	0.0000010	0.0000038	0.0000010	0.0000010	0.00000077	0.00000120	0.00000100
Water	81112	14816 min, dissolved	0.0000010	0.0000029	0.0000010	0.0000010	0.00000065	0.00000110	0.00000100
Water	81113	18820 min, dissolved	0.0000010	0.0000037	0.0000010	0.0000010	0.00000060	0.00000140	0.00000100
Water	80897	2& 4 min, total	0.0001200	0.0000011	0.0000011	0.00000160	0.000001400	0.000003600	0.000002000
Water	80898	6& 8 min, total	0.0000011	0.0000011	0.0000088	0.00000200	0.000001400	0.000003400	0.00000190
Water	80899	10812 min, total	0.0000130	0.0000011	0.00000120	0.00000260	0.000001600	0.000003700	0.00000220
Water	80900	14816 min, total	0.0000180	0.0000011	0.00000140	0.00000300	0.000002000	0.000004300	0.00000270
Water	80901	18820 min, total	0.0000180	0.0000010	0.00000130	0.00000270	0.000001800	0.000003900	0.00000270
		Site Water							
Water	81603	Sample 1 Total	0.0000010	0.0000024	0.0000010	0.0000014	0.00000065	0.00000092	0.00000100
Water	81604	Sample 2 Total	0.0000010	0.0000022	0.0000010	0.0000015	0.00000100	0.00000100	0.00000100
Water	81605	Sample 3 Total	0.0000010	0.0000025	0.0000010	0.0000014	0.00000047	0.00000110	0.00000100
		Elutriate							
Water	81609	Sample 1 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100
Water	81610	Sample 2 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.00000077	0.00000100
Water	81611	Sample 3 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.00000100	0.00000054	0.00000100
Water	81606	Sample 1 Total	0.0000010	0.0000039	0.0000010	0.0000010	0.000000300	0.00000150	0.00000100
Water	81607	Sample 2 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.000000330	0.00000180	0.00000100
Water	81608	Sample 3 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.00000290	0.00000160	0.00000100
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 28	PCB 31	PCB 40	PCB 44	PCB 49	PCB 52	PCB 60
		Detection Limit (mg/kg)	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
		In situ Sediment							
Sediment	81717	Sample #1	0.00077	0.00077	0.00077	0.00077	0.00061	0.00250	0.00057
Sediment	81718	Sample #2	0.00077	0.00077	0.00077	0.00077	0.00081	0.00250	0.00047
Sediment	81719	Sample #3	0.00077	0.00077	0.00077	0.00077	0.00069	0.00240	0.00039
BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.									

PCBs fine									
Delaware River Water Analysis (Fine-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 70	PCB 77	PCB 82	PCB 86	PCB 87	PCB 97	PCB 101
		Detection Limit (mg/l)	0.00000110	0.0000011	0.0000011	0.00000110	0.00000110	0.00000110	0.00000110
Water	80983	Plume Monitoring Background, dissolved	0.00000040	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000110
Water	80948	Background, total	0.00000110	0.0000011	0.0000011	0.0000057	0.00000110	0.0000057	0.00000160
Water	80984	0-10 min, overflow, dissolved	0.00000100	0.0000010	0.00000100	0.00000100	0.00000100	0.00000100	0.00000064
Water	80985	10-20 min, overflow, dissolved	0.00000051	0.0000011	0.0000011	0.00000110	0.00000110	0.00000110	0.00000093
Water	80986	20-30 min, overflow, dissolved	0.00000044	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000074
Water	80949	0-10 min, overflow, total	0.00000100	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000180
Water	80950	10-20 min, overflow, total	0.00000048	0.0000010	0.0000010	0.0000063	0.00000100	0.0000063	0.00000200
Water	80951	20-30 min, overflow, total	0.00000038	0.0000010	0.0000010	0.0000053	0.00000100	0.0000053	0.00000190
Water	80987	0-10 min, non-overflow, dissolve	0.00000037	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000093
Water	80988	10-20 min, non-overflow, dissolve	0.00000050	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000085
Water	80989	20-30 min, non-overflow, dissolve	0.00000056	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000091
Water	80952	0-10 min, non-overflow, total	0.00000041	0.0000010	0.0000010	0.0000041	0.00000100	0.0000041	0.00000150
Water	80953	10-20 min, non-overflow, total	0.00000038	0.0000010	0.0000010	0.0000047	0.00000100	0.0000047	0.00000230
Water	80954	20-30 min, non-overflow, total	0.00000038	0.0000010	0.0000010	0.0000043	0.0000054	0.0000043	0.00000190
Water	81104	Hopper Inflow Monitoring 3& 6 min, dissolved	0.00000062	0.0000010	0.0000010	0.00000100	0.0000038	0.00000100	0.00000120
Water	81105	9&12 min, dissolved	0.00000042	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000061
Water	81106	15&18 min, dissolved	0.00000053	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000085
Water	81107	21&24 min, dissolved	0.00000059	0.0000010	0.0000010	0.00000100	0.0000042	0.00000100	0.00000120
Water	81108	27&30 min, dissolved	0.00000041	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000074
Water	80891	3& 6 min, total	0.00000420	0.0000011	0.0000014	0.0000300	0.0000310	0.0000300	0.00000900
Water	80892	9&12 min, total	0.00000890	0.0000010	0.0000010	0.0000600	0.0000420	0.0000600	0.00001900
Water	80893	15&18 min, total	0.00000660	0.0000010	0.0000010	0.0000420	0.0000290	0.0000420	0.00001100
Water	80894	21&24 min, total	0.00000640	0.0000011	0.0000011	0.0000730	0.0000290	0.0000730	0.00001200
Water	80895	27&30 min, total	0.00001100	0.0000011	0.0000011	0.0000730	0.00000110	0.0000730	0.00002500
Water	81109	Hopper Overflow Monitoring 2& 4 min, dissolved	0.00000086	0.0000010	0.0000010	0.00000100	0.0000064	0.00000100	0.00000090
Water	81110	6& 8 min, dissolved	0.000000120	0.0000010	0.0000010	0.00000100	0.0000058	0.00000100	0.00000100
Water	81111	10&12 min, dissolved	0.00000084	0.0000010	0.0000010	0.00000100	0.0000065	0.00000100	0.00000120
Water	81112	14&16 min, dissolved	0.00000059	0.0000010	0.0000010	0.00000100	0.0000036	0.00000100	0.00000097
Water	81113	18&20 min, dissolved	0.00000074	0.0000010	0.0000010	0.00000100	0.0000050	0.00000100	0.00000100
Water	80897	2& 4 min, total	0.00001200	0.0000011	0.0000011	0.0000870	0.00000110	0.0000870	0.00002900
Water	80898	6& 8 min, total	0.00001300	0.0000011	0.0000011	0.0000950	0.00000110	0.0000950	0.00002900
Water	80899	10&12 min, total	0.00001500	0.0000011	0.0000011	0.0000960	0.00000110	0.0000960	0.00003400
Water	80900	14&16 min, total	0.00001600	0.0000011	0.0000011	0.00001100	0.0000980	0.00001100	0.00004000
Water	80901	18&20 min, total	0.00001600	0.0000010	0.0000010	0.0000980	0.00000100	0.0000980	0.00003400
Water	81603	Site Water Sample 1 Total	0.00000100	0.0000010	0.0000010	0.00000100	0.0000054	0.00000100	0.00000110
Water	81604	Sample 2 Total	0.00000140	0.0000010	0.0000010	0.00000100	0.0000049	0.00000100	0.00000140
Water	81605	Sample 3 Total	0.00000130	0.0000010	0.0000010	0.00000100	0.0000038	0.00000100	0.00000150
Water	81609	Elutriate Sample 1 Dissolved	0.00000110	0.0000010	0.0000010	0.00000100	0.0000052	0.00000100	0.00000120
Water	81610	Sample 2 Dissolved	0.00000160	0.0000010	0.0000010	0.00000100	0.0000063	0.00000100	0.00000075
Water	81611	Sample 3 Dissolved	0.00000150	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000060
Water	81606	Sample 1 Total	0.00000100	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000075
Water	81607	Sample 2 Total	0.00000100	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000083
Water	81608	Sample 3 Total	0.00000100	0.0000010	0.0000010	0.00000100	0.00000100	0.00000100	0.00000079
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 70	PCB 77	PCB 82	PCB 86	PCB 87	PCB 97	PCB 101
		Detection Limit (mg/kg)	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81717	In situ Sediment Sample #1	0.00210	0.00077	0.00077	0.00077	0.00077	0.00077	0.00100
Sediment	81718	Sample #2	0.00200	0.00077	0.00077	0.00077	0.00077	0.00077	0.00120
Sediment	81719	Sample #3	0.00180	0.00077	0.00077	0.00077	0.00077	0.00077	0.00100

BOLD - less than values
Values below less than values are estimated results. Results are less than the reporting limit.

PCBs fine									
Delaware River Water Analysis (Fine-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 105	PCB 114	PCB 118	PCB 121	PCB 128	PCB 136	PCB 137
		Detection Limit (mg/l)	0.00000110	0.00000110	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011
Water	80983	Plume Monitoring							
Water	80948	Background, dissolved	0.00000041	0.00000100	0.00000077	0.0000010	0.0000010	0.0000010	0.0000010
Water	80948	Background, total	0.00000110	0.00000110	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011
Water	80984	0-10 min, overflow, dissolved	0.00000037	0.00000066	0.00000051	0.0000010	0.0000010	0.0000010	0.0000010
Water	80985	10-20 min, overflow, dissolved	0.00000110	0.00000110	0.00000064	0.0000011	0.0000011	0.0000011	0.0000011
Water	80986	20-30 min, overflow, dissolved	0.00000041	0.00000060	0.00000045	0.0000010	0.0000010	0.0000010	0.0000010
Water	80949	0-10 min, overflow, total	0.00000100	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80950	10-20 min, overflow, total	0.00000100	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80951	20-30 min, overflow, total	0.00000100	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80987	0-10 min, non-overflow, dissolve	0.00000100	0.00000074	0.00000050	0.0000010	0.0000010	0.0000010	0.0000010
Water	80988	10-20 min, non-overflow, dissolve	0.00000040	0.00000100	0.00000046	0.0000010	0.0000010	0.0000010	0.0000010
Water	80989	20-30 min, non-overflow, dissolve	0.00000039	0.00000100	0.00000045	0.0000010	0.0000010	0.0000010	0.0000010
Water	80952	0-10 min, non-overflow, total	0.00000100	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80953	10-20 min, non-overflow, total	0.00000100	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80954	20-30 min, non-overflow, total	0.00000100	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
		Hopper Inflow Monitoring							
Water	81104	38-6 min, dissolved	0.00000041	0.00000100	0.00000054	0.0000010	0.0000010	0.0000010	0.0000010
Water	81105	98-12 min, dissolved	0.00000056	0.00000100	0.00000045	0.0000010	0.0000010	0.0000010	0.0000010
Water	81106	158-18 min, dissolved	0.00000035	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	81107	21&24 min, dissolved	0.00000043	0.00000100	0.00000060	0.0000010	0.0000010	0.0000010	0.0000010
Water	81108	27&30 min, dissolved	0.00000037	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80891	38-6 min, total	0.00000110	0.00000110	0.00000750	0.0000011	0.0000011	0.0000011	0.0000011
Water	80892	9&12 min, total	0.00000100	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80893	158-18 min, total	0.00000100	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	80894	21&24 min, total	0.00000110	0.00000110	0.00000110	0.0000011	0.0000011	0.0000011	0.0000011
Water	80895	27&30 min, total	0.00000110	0.00000110	0.00001900	0.0000011	0.0000011	0.0000011	0.0000011
		Hopper Overflow Monitoring							
Water	81109	28-4 min, dissolved	0.00000047	0.00000100	0.00000065	0.0000010	0.0000010	0.0000010	0.0000010
Water	81110	6&8 min, dissolved	0.00000090	0.00000100	0.00000065	0.0000010	0.0000010	0.0000010	0.0000010
Water	81111	108-12 min, dissolved	0.00000097	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
Water	81112	148-16 min, dissolved	0.00000036	0.00000100	0.00000068	0.0000010	0.0000010	0.0000010	0.0000010
Water	81113	188-20 min, dissolved	0.00000055	0.00000100	0.00000094	0.0000010	0.0000010	0.0000010	0.0000010
Water	80897	2&4 min, total	0.00000110	0.00000110	0.000002400	0.0000011	0.0000011	0.0000011	0.0000011
Water	80898	6&8 min, total	0.00000110	0.00000110	0.000002300	0.0000011	0.0000011	0.0000011	0.0000011
Water	80899	108-12 min, total	0.00000110	0.00000110	0.000003000	0.0000011	0.0000011	0.0000011	0.0000011
Water	80900	148-16 min, total	0.00000110	0.00000110	0.000003800	0.0000011	0.0000011	0.0000011	0.0000011
Water	80901	188-20 min, total	0.00000100	0.00000100	0.000003200	0.0000010	0.0000010	0.00000190	0.0000010
		Site Water							
Water	81603	Sample 1 Total	0.00000043	0.00000140	0.00000096	0.0000010	0.0000010	0.0000010	0.0000010
Water	81604	Sample 2 Total	0.00000054	0.00000140	0.00000093	0.0000010	0.0000010	0.0000010	0.0000010
Water	81605	Sample 3 Total	0.00000050	0.00000120	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
		Elutriate							
Water	81609	Sample 1 Dissolved	0.00000067	0.00000100	0.00000058	0.0000010	0.0000010	0.0000010	0.0000010
Water	81610	Sample 2 Dissolved	0.00000054	0.00000100	0.00000048	0.0000010	0.0000010	0.0000010	0.0000010
Water	81611	Sample 3 Dissolved	0.00000042	0.00000100	0.00000052	0.0000010	0.0000010	0.0000010	0.0000010
Water	81606	Sample 1 Total	0.00000068	0.00000100	0.00000120	0.0000010	0.0000010	0.0000010	0.0000010
Water	81607	Sample 2 Total	0.00000071	0.00000100	0.00000130	0.0000010	0.0000010	0.0000010	0.0000010
Water	81608	Sample 3 Total	0.00000064	0.00000100	0.00000100	0.0000010	0.0000010	0.0000010	0.0000010
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 105	PCB 114	PCB 118	PCB 121	PCB 128	PCB 136	PCB 137
		Detection Limit (mg/kg)	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
		Insitu Sediment							
Sediment	81717	Sample #1	0.00077	0.00077	0.00098	0.00077	0.00077	0.00077	0.00077
Sediment	81718	Sample #2	0.00077	0.00077	0.00110	0.00077	0.00077	0.00077	0.00077
Sediment	81719	Sample #3	0.00077	0.00077	0.00100	0.00077	0.00077	0.00077	0.00077
BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.									

PCBs fine									
Delaware River Water Analysis (Fine-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 138	PCB 141	PCB 151	PCB 153	PCB 156	PCB 167	PCB 170
		Detection Limit (mg/l)	0.00000110	0.0000011	0.0000011	0.0000011	0.00000110	0.0000011	0.0000011
Water	80983	Plume Monitoring							
Water	80948	Background, dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80948	Background, total	0.00000045	0.0000011	0.0000011	0.0000011	0.00000110	0.0000011	0.0000011
Water	80984	0-10 min, overflow, dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.00000030	0.0000010	0.0000010
Water	80985	10-20 min, overflow, dissolved	0.00000100	0.0000011	0.0000011	0.0000011	0.00000038	0.0000011	0.0000011
Water	80986	20-30 min, overflow, dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80949	0-10 min, overflow, total	0.00000077	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80950	10-20 min, overflow, total	0.00000066	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80951	20-30 min, overflow, total	0.00000066	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80987	0-10 min, non-overflow, dissolve	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80988	10-20 min, non-overflow, dissolve	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80989	20-30 min, non-overflow, dissolve	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80952	0-10 min, non-overflow, total	0.00000061	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80953	10-20 min, non-overflow, total	0.00000057	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80954	20-30 min, non-overflow, total	0.00000045	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
		Hopper Inflow Monitoring							
Water	81104	3& 6 min, dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81105	9&12 min, dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81106	15&18 min, dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81107	21&24 min, dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81108	27&30 min, dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80891	3& 6 min, total	0.00001400	0.0000011	0.0000027	0.0000011	0.00000110	0.0000011	0.0000011
Water	80892	9&12 min, total	0.00003400	0.0000010	0.0000058	0.0000010	0.00000100	0.0000010	0.0000010
Water	80893	15&18 min, total	0.00002300	0.0000010	0.0000062	0.0000010	0.00000100	0.0000010	0.0000010
Water	80894	21&24 min, total	0.00002400	0.0000011	0.0000045	0.0000011	0.00000350	0.0000021	0.0000086
Water	80895	27&30 min, total	0.00000110	0.0000011	0.0000089	0.0000011	0.00000110	0.0000011	0.0000011
		Hopper Overflow Monitoring							
Water	81109	2& 4 min, dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81110	6& 8 min, dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81111	10&12 min, dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81112	14&16 min, dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81113	18&20 min, dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	80897	2& 4 min, total	0.00000110	0.0000010	0.0000098	0.0000011	0.00000110	0.0000011	0.0000011
Water	80898	6& 8 min, total	0.00000110	0.0000010	0.0000094	0.0000011	0.00000760	0.0000011	0.0000011
Water	80899	10&12 min, total	0.00000110	0.0000010	0.0000120	0.0000011	0.00000790	0.0000011	0.0000011
Water	80900	14&16 min, total	0.00000110	0.0000010	0.0000190	0.0000011	0.00001200	0.0000011	0.0000011
Water	80901	18&20 min, total	0.00000100	0.0000010	0.0000110	0.0000010	0.00000790	0.0000010	0.0000010
		Site Water							
Water	81603	Sample 1 Total	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81604	Sample 2 Total	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81605	Sample 3 Total	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
		Elutriate							
Water	81609	Sample 1 Dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81610	Sample 2 Dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81611	Sample 3 Dissolved	0.00000100	0.0000010	0.0000010	0.0000010	0.00000100	0.0000010	0.0000010
Water	81606	Sample 1 Total	0.00000100	0.0000010	0.0000010	0.0000012	0.00000100	0.0000010	0.0000010
Water	81607	Sample 2 Total	0.00000100	0.0000010	0.0000010	0.0000012	0.00000100	0.0000010	0.0000010
Water	81608	Sample 3 Total	0.00000100	0.0000010	0.0000013	0.00000100	0.00000100	0.0000010	0.0000010
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 138	PCB 141	PCB 151	PCB 153	PCB 156	PCB 167	PCB 170
		Detection Limit (mg/kg)	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
		In situ Sediment							
Sediment	81717	Sample #1	0.00077	0.00077	0.00077	0.00150	0.00077	0.00077	0.00077
Sediment	81718	Sample #2	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81719	Sample #3	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.									

PCBs fine									
Delaware River Water Analysis (Fine-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 171	PCB 180	PCB 182	PCB 183	PCB 185	PCB 187	PCB 189
		Detection Limit (mg/l)	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80983	Plume Monitoring							
Water	80948	Background, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80948	Background, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80984	0-10 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80985	10-20 min, overflow, dissolved	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80986	20-30 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80949	0-10 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80950	10-20 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80951	20-30 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80987	0-10 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80988	10-20 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80989	20-30 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80952	0-10 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80953	10-20 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80954	20-30 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Hopper inflow Monitoring							
Water	81104	3& 6 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81105	9&12 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81106	15&18 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81107	21&24 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81108	27&30 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80891	3& 6 min, total	0.0000012	0.0000011	0.0000011	0.0000029	0.0000046	0.0000092	0.0000011
Water	80892	9&12 min, total	0.0000034	0.0000010	0.0000010	0.0000068	0.0000010	0.0000210	0.0000010
Water	80893	15&18 min, total	0.0000022	0.0000010	0.0000010	0.0000038	0.0000010	0.0000140	0.0000010
Water	80894	21&24 min, total	0.0000011	0.0000280	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80895	27&30 min, total	0.0000011	0.0000490	0.0000011	0.0000022	0.0000011	0.0000011	0.0000011
		Hopper Overflow Monitoring							
Water	81109	2& 4 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81110	6& 8 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81111	10&12 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81112	14&16 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81113	18&20 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80897	2& 4 min, total	0.0000011	0.00000590	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80898	6& 8 min, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80899	10&12 min, total	0.0000069	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80900	14&16 min, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80901	18&20 min, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Site Water							
Water	81603	Sample 1 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81604	Sample 2 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81605	Sample 3 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Elutriate							
Water	81609	Sample 1 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81610	Sample 2 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81611	Sample 3 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81606	Sample 1 Total	0.0000010	0.0000016	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81607	Sample 2 Total	0.0000010	0.0000018	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81608	Sample 3 Total	0.0000010	0.0000016	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 171	PCB 180	PCB 182	PCB 183	PCB 185	PCB 187	PCB 189
		Detection Limit (mg/kg)	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
		In situ Sediment							
Sediment	81717	Sample #1	0.00077	0.00150	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81718	Sample #2	0.00077	0.00140	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81719	Sample #3	0.00077	0.00160	0.00077	0.00077	0.00077	0.00100	0.00077

BOLD - less than values
Values below less than values are estimated results. Results are less than the reporting limit.

PCBs fine									
Delaware River Water Analysis (Fine-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 191	PCB 194	PCB 195	PCB 196	PCB 201	PCB 203	PCB 205
		Detection Limit (mg/l)	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80983	Plume Monitoring							
Water	80948	Background, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80948	Background, total	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80984	0-10 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80985	10-20 min, overflow, dissolved	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011	0.0000011
Water	80986	20-30 min, overflow, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80949	0-10 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80950	10-20 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80951	20-30 min, overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80987	0-10 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80988	10-20 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80989	20-30 min, non-overflow, dissolve	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80952	0-10 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80953	10-20 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80954	20-30 min, non-overflow, total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Hopper Inflow Monitoring							
Water	81104	3& 6 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81105	9&12 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81106	15&18 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81107	21&24 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81108	27&30 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80891	3& 6 min, total	0.0000011	0.0000011	0.0000090	0.0000026	0.0000011	0.0000011	0.0000011
Water	80892	9&12 min, total	0.0000010	0.0000010	0.0000026	0.0000065	0.0000010	0.0000010	0.0000010
Water	80893	15&18 min, total	0.0000010	0.0000010	0.0000016	0.0000039	0.0000010	0.0000010	0.0000010
Water	80894	21&24 min, total	0.0000011	0.0000011	0.0000011	0.0000036	0.0000011	0.0000011	0.0000011
Water	80895	27&30 min, total	0.0000011	0.0000011	0.0000080	0.0000011	0.0000011	0.0000011	0.0000011
		Hopper Overflow Monitoring							
Water	81109	2& 4 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81110	6& 8 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81111	10&12 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81112	14&16 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81113	18&20 min, dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	80897	2& 4 min, total	0.0000011	0.0000011	0.0000041	0.0000010	0.0000011	0.0000011	0.0000011
Water	80898	6& 8 min, total	0.0000011	0.0000011	0.0000081	0.0000067	0.0000011	0.0000011	0.0000011
Water	80899	10&12 min, total	0.0000011	0.0000011	0.0000044	0.0000100	0.0000011	0.0000011	0.0000011
Water	80900	14&16 min, total	0.0000011	0.0000011	0.0000010	0.0000090	0.0000011	0.0000011	0.0000011
Water	80901	18&20 min, total	0.0000010	0.0000010	0.00000150	0.0000097	0.0000010	0.0000010	0.0000010
		Site Water							
Water	81603	Sample 1 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81604	Sample 2 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81605	Sample 3 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
		Elutriate							
Water	81609	Sample 1 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81610	Sample 2 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81611	Sample 3 Dissolved	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81606	Sample 1 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81607	Sample 2 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
Water	81608	Sample 3 Total	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010	0.0000010
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 191	PCB 194	PCB 195	PCB 196	PCB 201	PCB 203	PCB 205
		Detection Limit (mg/kg)	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81717	In situ Sediment	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077	0.00077
Sediment	81718	Sample #2	0.00077	0.00077	0.00077	0.00033	0.00077	0.00082	0.00077
Sediment	81719	Sample #3	0.00077	0.00077	0.00077	0.00025	0.00077	0.00084	0.00077
BOLD - less than values									
Values below less than values are estimated results. Results are less than the reporting limit.									

PCBs fine									
Delaware River Water Analysis (Fine-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 206	PCB 207	PCB 208	PCB 209	PCB 66	PCB 190	PCB 198
		Detection Limit (mg/l)	0.0000011	0.00000110	0.00000110		0.0000011	0.0000011	0.0000011
Water	80983	Plume Monitoring							
Water	80948	Background, dissolved	0.0000025	0.00000095	0.00000130	106.45%	0.0000010	0.0000010	0.0000010
Water	80948	Background, total	0.0000017	0.00000110	0.00000081	74.06%	0.0000011	0.0000011	0.0000011
Water	80984	0-10 min, overflow, dissolved	0.0000024	0.00000090	0.00000150	92.43%	0.0000010	0.0000010	0.0000010
Water	80985	10-20 min, overflow, dissolved	0.0000027	0.00000110	0.00000170	100.50%	0.0000011	0.0000011	0.0000011
Water	80986	20-30 min, overflow, dissolved	0.0000026	0.00000110	0.00000140	99.77%	0.0000010	0.0000010	0.0000010
Water	80949	0-10 min, overflow, total	0.0000020	0.00000100	0.00000092	64.53%	0.0000010	0.0000010	0.0000010
Water	80950	10-20 min, overflow, total	0.0000020	0.00000100	0.00000085	75.26%	0.0000010	0.0000010	0.0000010
Water	80951	20-30 min, overflow, total	0.0000020	0.00000100	0.00000089	81.36%	0.0000010	0.0000010	0.0000010
Water	80987	0-10 min, non-overflow, dissolve	0.0000026	0.00000095	0.00000140	101.88%	0.0000010	0.0000010	0.0000010
Water	80988	10-20 min, non-overflow, dissolve	0.0000025	0.00000074	0.00000130	104.87%	0.0000010	0.0000010	0.0000010
Water	80989	20-30 min, non-overflow, dissolve	0.0000024	0.00000071	0.00000120	112.74%	0.0000010	0.0000010	0.0000010
Water	80952	0-10 min, non-overflow, total	0.0000016	0.00000100	0.00000074	80.06%	0.0000010	0.0000010	0.0000010
Water	80953	10-20 min, non-overflow, total	0.0000017	0.00000100	0.00000075	88.73%	0.0000010	0.0000010	0.0000010
Water	80954	20-30 min, non-overflow, total	0.0000017	0.00000100	0.00000083	87.12%	0.0000010	0.0000010	0.0000010
		Hopper Inflow Monitoring							
Water	81104	3& 6 min, dissolved	0.0000016	0.00000049	0.00000077	90.09%	0.0000010	0.0000010	0.0000010
Water	81105	9&12 min, dissolved	0.0000019	0.00000056	0.00000087	86.49%	0.0000010	0.0000010	0.0000010
Water	81106	15&18 min, dissolved	0.0000019	0.00000040	0.00000150	87.34%	0.0000010	0.0000010	0.0000010
Water	81107	21&24 min, dissolved	0.0000021	0.00000065	0.00000100	94.48%	0.0000010	0.0000010	0.0000010
Water	81108	27&30 min, dissolved	0.0000017	0.00000054	0.00000094	72.89%	0.0000010	0.0000010	0.0000010
Water	80891	3& 6 min, total	0.0000410	0.00000280	0.00001700	97.66%	0.0000011	0.0000011	0.0000011
Water	80892	9&12 min, total	0.0000900	0.00000530	0.00004100	58.62%	0.0000010	0.0000010	0.0000010
Water	80893	15&18 min, total	0.0000580	0.00000650	0.00002500	108.63%	0.0000010	0.0000010	0.0000010
Water	80894	21&24 min, total	0.0000460	0.00000190	0.00001900	108.05%	0.0000011	0.0000011	0.0000011
Water	80895	27&30 min, total	0.0000920	0.00000620	0.00004000	124.79%	0.0000011	0.0000011	0.0000011
		Hopper Overflow Monitoring							
Water	81109	2& 4 min, dissolved	0.0000019	0.00000037	0.00000061	81.94%	0.0000010	0.0000010	0.0000010
Water	81110	6& 8 min, dissolved	0.0000016	0.00000100	0.00000061	78.71%	0.0000010	0.0000010	0.0000010
Water	81111	10&12 min, dissolved	0.0000017	0.00000100	0.00000084	88.72%	0.0000010	0.0000010	0.0000010
Water	81112	14&16 min, dissolved	0.0000018	0.00000043	0.00000086	83.24%	0.0000010	0.0000010	0.0000010
Water	81113	18&20 min, dissolved	0.0000016	0.00000043	0.00000077	80.18%	0.0000010	0.0000010	0.0000010
Water	80897	2& 4 min, total	0.0001700	0.00000960	0.00007400	220.34%	0.0000011	0.0000011	0.0000011
Water	80898	6& 8 min, total	0.0001200	0.00000720	0.00005100	213.26%	0.0000011	0.0000011	0.0000011
Water	80899	10&12 min, total	0.0001200	0.00000860	0.00005200	175.12%	0.0000011	0.0000011	0.0000011
Water	80900	14&16 min, total	0.0001300	0.00001000	0.00005800	216.74%	0.0000011	0.0000011	0.0000011
Water	80901	18&20 min, total	0.0001200	0.00000840	0.00005900	186.63%	0.0000010	0.0000010	0.0000010
		Site Water							
Water	81603	Sample 1 Total	0.0000028	0.00000062	0.00000110	101.92%	0.0000010	0.0000010	0.0000010
Water	81604	Sample 2 Total	0.0000024	0.00000100	0.00000100	90.51%	0.0000010	0.0000010	0.0000010
Water	81605	Sample 3 Total	0.0000022	0.00000100	0.00000092	90.22%	0.0000010	0.0000010	0.0000010
		Elutriate							
Water	81609	Sample 1 Dissolved	0.0000018	0.00000027	0.00000058	88.71%	0.0000010	0.0000010	0.0000010
Water	81610	Sample 2 Dissolved	0.0000021	0.00000029	0.00000085	96.44%	0.0000010	0.0000010	0.0000010
Water	81611	Sample 3 Dissolved	0.0000021	0.00000054	0.00000078	101.29%	0.0000010	0.0000010	0.0000010
Water	81606	Sample 1 Total	0.0000052	0.00000059	0.00000270	91.62%	0.0000010	0.0000010	0.0000010
Water	81607	Sample 2 Total	0.0000051	0.00000100	0.00000270	90.36%	0.0000010	0.0000010	0.0000010
Water	81608	Sample 3 Total	0.0000052	0.00000068	0.00000280	88.68%	0.0000010	0.0000010	0.0000010
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 206	PCB 207	PCB 208	PCB 209	PCB 66	PCB 190	PCB 198
		Detection Limit (mg/kg)	0.00077	0.00077	0.00077		0.00077	0.00077	0.00077
		In situ Sediment							
Sediment	81717	Sample #1	0.00390	0.00048	0.00220	106.21%	0.00077	0.00077	0.00077
Sediment	81718	Sample #2	0.00120	0.00077	0.00210	105.19%	0.00077	0.00077	0.00077
Sediment	81719	Sample #3	0.00370	0.00077	0.00180	98.01%	0.00077	0.00077	0.00077
BOLD - less than values Values below less than values are estimated results. Results are less than the reporting limit.									

PCBs fine

Delaware River Water Analysis (Fine-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 200
-------------	-----------	-------------	---------

		Detection Limit (mg/l)	0.0000011
--	--	------------------------	-----------

Water	80983	Plume Monitoring	
Water	80948	Background, dissolved	0.0000010
Water	80948	Background, total	0.0000011
Water	80984	0-10 min, overflow, dissolved	0.0000010
Water	80985	10-20 min, overflow, dissolved	0.0000011
Water	80986	20-30 min, overflow, dissolved	0.0000010
Water	80949	0-10 min, overflow, total	0.0000010
Water	80950	10-20 min, overflow, total	0.0000010
Water	80951	20-30 min, overflow, total	0.0000010
Water	80987	0-10 min, non-overflow, dissolve	0.0000010
Water	80988	10-20 min, non-overflow, dissolve	0.0000010
Water	80989	20-30 min, non-overflow, dissolve	0.0000010
Water	80952	0-10 min, non-overflow, total	0.0000010
Water	80953	10-20 min, non-overflow, total	0.0000010
Water	80954	20-30 min, non-overflow, total	0.0000010

Water	81104	Hopper Inflow Monitoring	
Water	81105	3& 6 min, dissolved	0.0000010
Water	81106	9&12 min, dissolved	0.0000010
Water	81106	15&18 min, dissolved	0.0000010
Water	81107	21&24 min, dissolved	0.0000010
Water	81108	27&30 min, dissolved	0.0000010
Water	80891	3& 6 min, total	0.0000015
Water	80892	9&12 min, total	0.0000034
Water	80893	15&18 min, total	0.0000020
Water	80894	21&24 min, total	0.0000019
Water	80895	27&30 min, total	0.0000011

Water	81109	Hopper Overflow Monitoring	
Water	81110	2& 4 min, dissolved	0.0000010
Water	81110	6& 8 min, dissolved	0.0000010
Water	81111	10&12 min, dissolved	0.0000010
Water	81112	14&16 min, dissolved	0.0000010
Water	81113	18&20 min, dissolved	0.0000010
Water	80897	2& 4 min, total	0.0000011
Water	80898	6& 8 min, total	0.0000033
Water	80899	10&12 min, total	0.0000064
Water	80900	14&16 min, total	0.0000011
Water	80901	18&20 min, total	0.0000010

Water	81603	Site Water	
Water	81604	Sample 1 Total	0.0000010
Water	81604	Sample 2 Total	0.0000010
Water	81605	Sample 3 Total	0.0000010

Water	81609	Elutriate	
Water	81610	Sample 1 Dissolved	0.0000010
Water	81610	Sample 2 Dissolved	0.0000010
Water	81611	Sample 3 Dissolved	0.0000010
Water	81606	Sample 1 Total	0.0000010
Water	81607	Sample 2 Total	0.0000010
Water	81608	Sample 3 Total	0.0000010

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	PCB 200
-------------	-----------	-------------	---------

		Detection Limit (mg/kg)	0.00077
--	--	-------------------------	---------

Sediment	81717	In situ Sediment	
Sediment	81718	Sample #1	0.00077
Sediment	81718	Sample #2	0.00077
Sediment	81719	Sample #3	0.00077

BOLD - less than values

Values below less than values are estimated results. Results are less than the reporting limit.

Delaware River Water Analysis (Fine-Grained Site)									
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	TSS						tsline
Water	81224	Plume Monitoring Background	4	10 min	20 min	30 min	40 min	50 min	Det Limit 4
Water	81225	TSS Top Depth	48	91	55	45	50	47	Plume Monitoring Background 5710
Water	81226	TSS Mid-Depth	110	35	98	144	80		
Water	81226	TSS Bottom Depth							
Water	81269	Plume Monitoring Non-Overflow	1 min	3 min	5 min	7 min	9 min	12 min	Plume Monitoring NOF
Water	81270	TSS Top Depth	54	89	47	41	70	41	Sample 1 5860
Water	81271	TSS Mid-Depth	116	105	76	47	83	68	Sample 2 5740
Water	81271	TSS Bottom Depth							
Water	81239	Plume Monitoring Overflow	1 min	3 min	5 min	7 min	9 min	12 min	Plume Monitoring OF
Water	81240	TSS Top Depth	102	314	55	204	90	280	Sample 1 4310
Water	81240	TSS Mid-Depth	118	376	155	288	160	138	Sample 2 4200
Water	81241	TSS Bottom Depth	206	177	335	386	504	275	Sample 3 3862
Water	81324	Hopper Inflow	-	3 min	8 min	9 min	12 min	15 min	Hopper inflow
Water	81324	TSS (mg/l)	-	1760	12860	3140	27767	27900	Sample 1 30767
Water	81352	Hopper Contents Beginning of Overflow	-	Location 1	Location 2	Location 3	Location 4	Location 5	Sample 2 84490
Water	81353	TSS Top Depth	93367	65267	69733	102433	119000		Sample 3 127760
Water	81354	TSS Mid-Depth	33233	55800	104200				Sample 4 37940
Water	81354	TSS Bottom Depth	127167	145200					Sample 5 151910
Water	81361	Hopper Contents End of Overflow	-	Location 1	Location 2	Location 3	Location 4	Location 5	
Water	81362	TSS Top Depth	71067	81233	29067	65267			
Water	81362	TSS Mid-Depth	106833	520533					
Water	81363	TSS Bottom Depth	60467	121533	138033				
Water	81044	Hopper Overflow	0.5 min	1.0 min	1.5 min	2.0 min	2.5 min	3.0 min	Hopper Overflow 154430
Water	81044	TSS (mg/l)	64260	41733	75333	57587	105800	110300	Sample 1 145210
Water	81054	Hopper Overflow	5.5 min	6.0 min	6.5 min	7.0 min	7.5 min	8.0 min	Sample 2 126870
Water	81054	TSS (mg/l)	117867	93833	66633	40233	56733	97167	Sample 3 167600
Water	81064	Hopper Overflow	10.5 min	11.0 min	11.5 min	12.0 min	12.5 min	13.0 min	Sample 4 170300
Water	81064	TSS (mg/l)	48200	58000	15700	63700	78100	62400	Sample 5 142353
Water	81074	Hopper Overflow	15.5 min	16.0 min	16.5 min	17.0 min	17.5 min	18.0 min	15.5 min 41967
Water	81074	TSS (mg/l)	52100	48267	137167	136467	78833	108600	159133 123700
Water	81675	Site Water Total	58						Site Water 4744
Water	81676	Sample 1 Total	63						Sample 1 T 4326
Water	81677	Sample 2 Total	65						Sample 2 T 4386
Water	81681	Elutriate	8						Elutriate 4228
Water	81682	Sample 1 Dissolved	12						Sample 1 D 4370
Water	81683	Sample 2 Dissolved	11						Sample 2 D 4472
Water	81678	Sample 3 Dissolved	304						Sample 3 D 4734
Water	81679	Sample 1 Total	282						Sample 1 T 4582
Water	81680	Sample 2 Total	292						Sample 2 T 4686
Water	81680	Sample 3 Total							Sample 3 T

nutrfine

Delaware River Water Analysis (Fine-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	TOC
		Detection Limit (mg/l)	3.00
		Plume Monitoring	
Water	80969	Background, dissolved	6.12
Water	80927	Background, total	7.30
Water	80970	0-10 min, overflow, dissolved	3.07
Water	80971	10-20 min, overflow, dissolved	2.91
Water	80972	20-30 min, overflow, dissolved	2.74
Water	80928	0-10 min, overflow, total	10.70
Water	80923	10-20 min, overflow, total	11.30
Water	80930	20-30 min, overflow, total	8.09
Water	80973	0-10 min, non-overflow, dissolved	4.68
Water	80974	10-20 min, non-overflow, dissolved	6.35
Water	80975	20-30 min, non-overflow, dissolved	5.19
Water	80931	0-10 min, non-overflow, total	6.92
Water	80932	10-20 min, non-overflow, total	7.44
Water	80933	20-30 min, non-overflow, total	8.69
		Hopper Inflow Monitoring	
Water	81084	3& 6 min, dissolved	24.80
Water	81085	9&12 min, dissolved	47.30
Water	81086	15&18 min, dissolved	64.60
Water	81087	21&24 min, dissolved	19.00
Water	81088	27&30 min, dissolved	63.00
Water	80855	3& 6 min, total	1010.00
Water	80856	9&12 min, total	3300.00
Water	80857	15&18 min, total	6030.00
Water	80858	21&24 min, total	1170.00
Water	80859	27&30 min, total	6460.00
		Hopper Overflow Monitoring	
Water	81089	2& 4 min, dissolved	14.10
Water	81090	6& 8 min, dissolved	11.90
Water	81091	10&12 min, dissolved	72.30
Water	81092	14&16 min, dissolved	79.20
Water	81093	18&20 min, dissolved	21.40
Water	80861	2& 4 min, total	6660.00
Water	80862	6& 8 min, total	5930.00
Water	80863	10&12 min, total	5280.00
Water	80864	14&16 min, total	6800.00
Water	80865	18&20 min, total	7150.00
		Site Water	
Water	81693	Sample 1 Total	3.00
Water	81694	Sample 2 Total	3.00
Water	81695	Sample 3 Total	3.00
		Elutriate	
Water	81699	Sample 1 Dissolved	3.00
Water	81700	Sample 2 Dissolved	3.00
Water	81701	Sample 3 Dissolved	3.00
Water	81696	Sample 1 Total	1.48
Water	81697	Sample 2 Total	1.43
Water	81698	Sample 3 Total	1.92
SAMPLE TYPE	SAMPLE ID	DESCRIPTION	TOC
		Detection Limit (mg/kg)	3.0
		Insitu Sediment	
Sediment	81723	Sample #1	8090.0
Sediment	81724	Sample #2	7200.0
Sediment	81725	Sample #3	7520.0

BOLD - less than values
 Values below less than values are estimated results. Results are less than the reporting limit.

spgrfine

Delaware River Water Analysis (Fine-Grained Site)

SAMPLE TYPE	SAMPLE ID	DESCRIPTION	Sp. Gr.	%Moisture
Insitu Sediment				
Sediment	81299	Sample #1	2.73	191.58%
Sediment	81300	Sample #2	2.75	254.93%
Sediment	81301	Sample #3	2.76	203.04%
Sediment	81302	Sample #4	2.74	181.93%
Sediment	81303	Sample #5	2.75	166.58%
Sediment	81304	Sample #6	2.72	117.93%
Sediment	81305	Sample #7	2.71	164.93%
Sediment	81306	Sample #8	2.72	108.57%
Sediment	81307	Sample #9	2.71	94.57%
Sediment	81308	Sample #10	2.73	103.87%
Sediment	81309	Sample #11	2.73	102.13%
Sediment	81310	Sample #12	2.73	130.69%
Sediment	81311	Sample #13	2.71	172.19%
Sediment	81312	Sample #14	2.72	156.47%
Sediment	81313	Sample #15	2.73	79.16%
			Average	2.73
				148.57%

Appendix B

Plume Study Field Activities and Data Results

Preface

This section of the report describes field activities and data results from the relative acoustic backscatter channel cross sections with the OBS overlay. The investigators who participated in this part of the project were Messrs. Timothy L. Fagerburg, Howard A. Benson, and Terry N. Waller, U.S. Army Engineer Research and Development Center (ERDC), Coastal and Hydraulics Laboratory (CHL), Vicksburg, MS, and William H. Dulaney, ERDC, Geotechnical and Structures Laboratory (GSL).

This section of the report was written by Messrs. Benson and Fagerburg, with assistance in data processing from Messrs. Waller, Martin T. Hebler, Mses. Clara J. Coleman and Jane M. Vaughan, CHL, and Mr. Daryl P. Cook, DIMCO, Inc., Vicksburg, MS.

Field Procedure

Two test areas were selected for monitoring. Reach 1, was a coarse-grained material site located near the Brandywine Range, in lower Delaware Bay. Reach 2, was a fine-grained material site located at the Deepwater Point Range near New Castle, DE (Figure B1). Channel cross-sectional transects were conducted with the 1,200-kHz Broad-Band Acoustic Doppler Current Profiler (ADCP) and Optical Backscatterance (OBS) sensor at several predetermined transect lines in the test areas for nonoverflow and overflow dredge operations. Several transects were monitored prior to the dredge passing to establish background conditions. The dredge would then begin dredging operations and the transect boat would run continuous transects behind it to determine the extent and dispersion of the plume. The first set of transects at each test area was made during the hopper dredge's being filled with no overflow. The dredge would then proceed to the dumping area, empty the load, and return to the site for the second test.

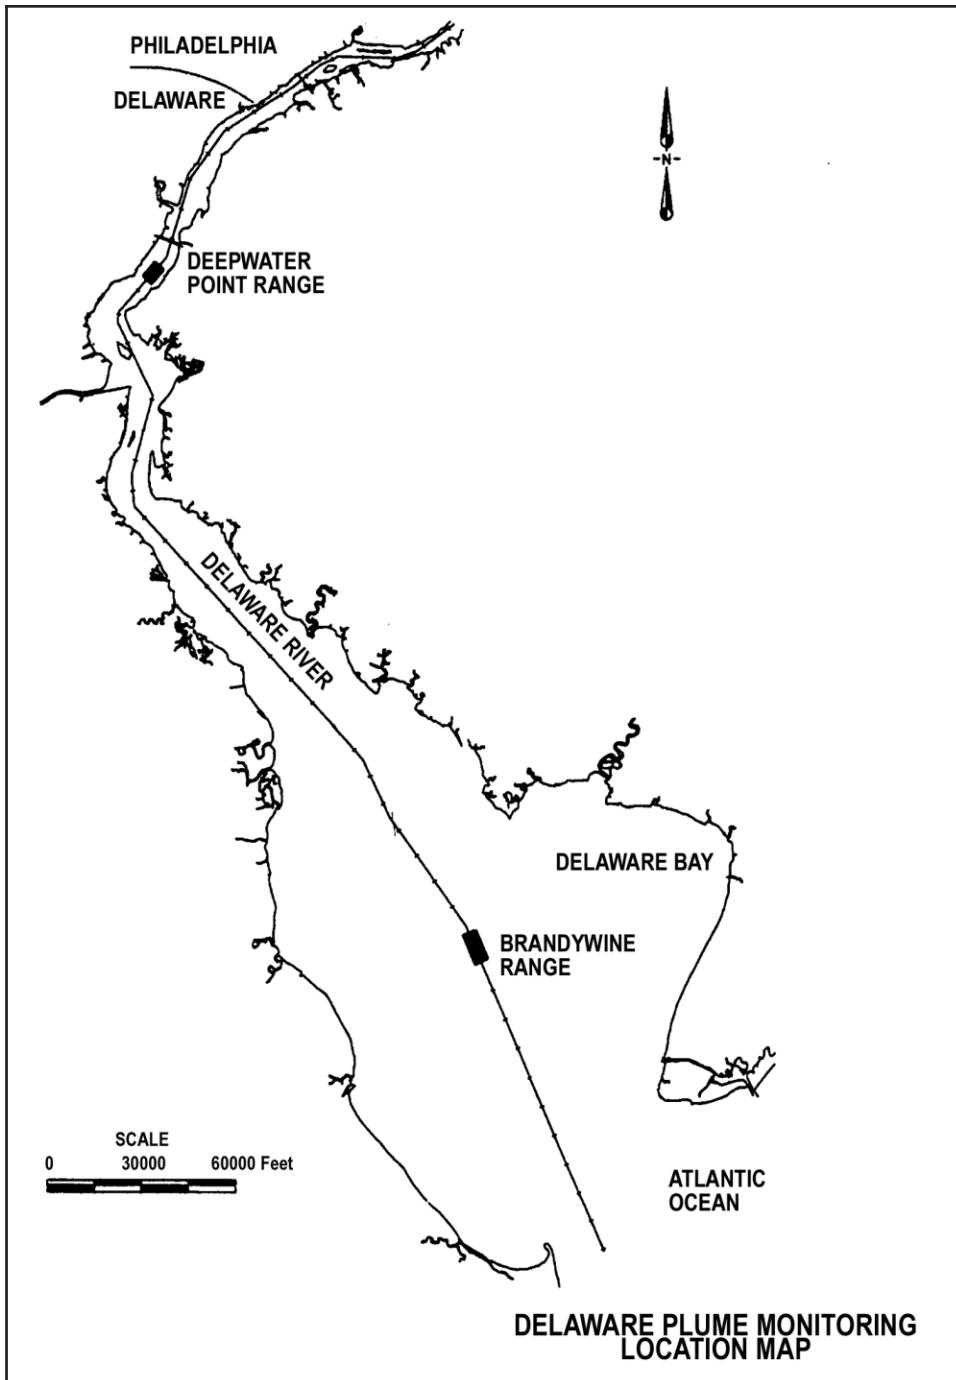


Figure B1. Delaware plume monitoring location map

Prior to the second test, data would be collected at several transect lines again to reestablish background conditions. The second dredging operation would include several minutes of hopper overflow while dredging. Again, the transect boat would run continuous transects behind it to determine the extent and dispersion of the plume.

Monitoring the sediment plume was accomplished using a boat-mounted RD Instruments 1200-kHz Broad-Band ADCP. The instrument collects velocity vectors in the water column together with backscatter levels to determine the position and relative intensity of the sediment plume. A detailed description of the ADCP is presented in the Equipment Description section.

Along with the ADCP, a MicroLite recording instrument with an OBS Sensor was towed by the vessel at a depth of 4.6 m (15 ft). The MicroLite recorded data at 0.5-sec intervals. A detailed description of the MicroLite is also presented in the Equipment Description section.

Navigation data for monitoring was obtained by a Starlink differential Global Positioning System (GPS). The GPS monitors the boat position from the starting and ending points along each transect. The manufacturer stated accuracy of the navigation system is ± 1 m. The navigation data were recorded at 1-sec intervals for merging with the ADCP and OBS data.

In situ sediment samples were collected prior to the dredging tests at both sites. Bottom samples were collected using a grab-type sampling bucket detailed in the Equipment Description section. Water samples for pore-water and toxicity tests were obtained using a portable pump sampler also described in the Equipment Description section. Types of samples, and the tests and analyses of the samples, are reported elsewhere in the report.

Dredge Plume Monitoring

The data presented in Figures B2 through B15 represent a time-history of the changes in suspended material levels in the water column resulting from dredge operations within each test area. The relative backscatter intensity of the ADCP acoustic signal is described as the strength of the return acoustic signal as it is affected by material suspended in the water column. Changes in levels of suspended material affect the acoustic reflectivity properties of the water column and, in turn, have an effect on the strength of the return signal intensity (decibels). High levels of suspended material in the water column result in high levels of acoustic intensity. The ADCP acoustic intensity data were utilized to identify levels of suspended material in the water column before, during, and following dredging operations.

As stated previously, transects were monitored in each test area to obtain the background levels of suspended materials prior to any dredging activities. The background levels shown in Figures B2 and B5 and in B9 and B12 are for the two test areas, Brandywine Range (Reach 1) and Deepwater Point Range (Reach 2), respectively.

Figures B2 through B4 illustrate the residence time of the sediment plume resulting from nonoverflow dredging operation in the Reach 1. The background levels are shown in Figure B2. Figure B3 shows the vertical

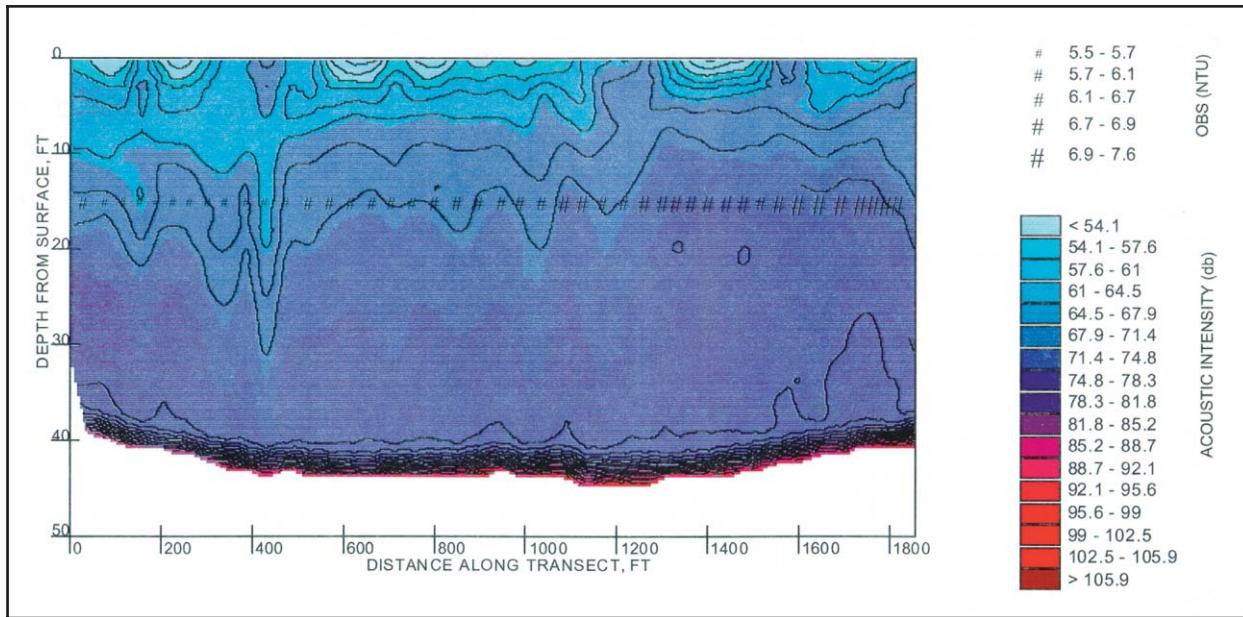


Figure B2. Relative acoustic intensity and OBS readings, Line 3, 1509 EST, Brandywine Range - Reach 1, 09/15/98

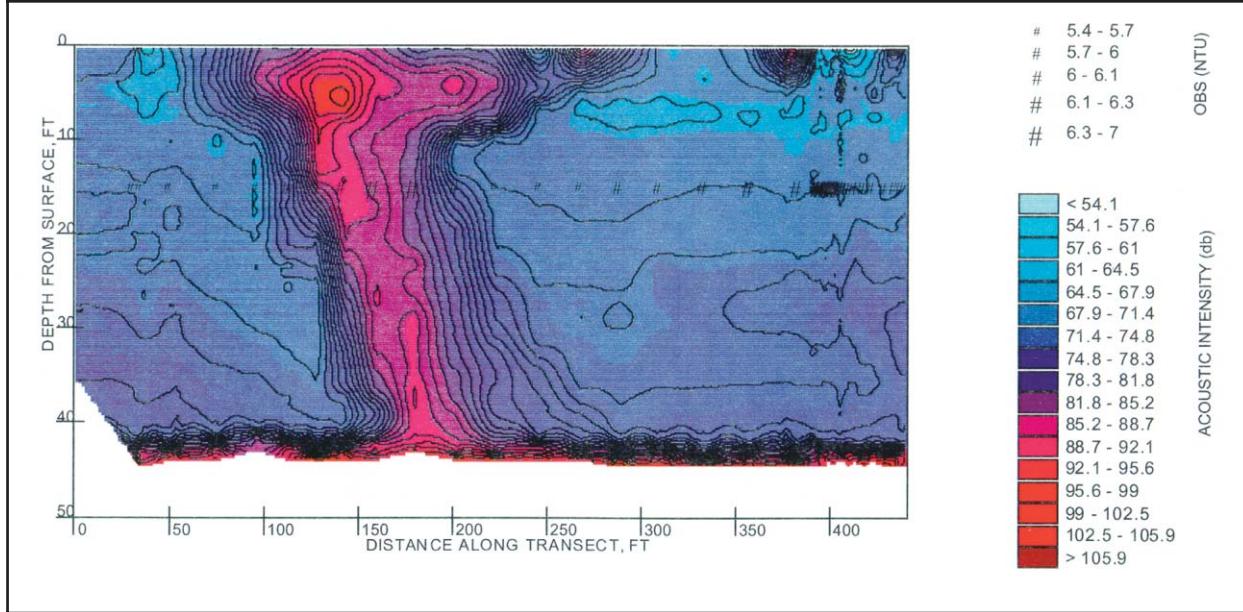


Figure B3. Relative acoustic intensity and OBS readings, Line 305, 1633 EST, Brandywine Range - Reach 1, 09/15/98

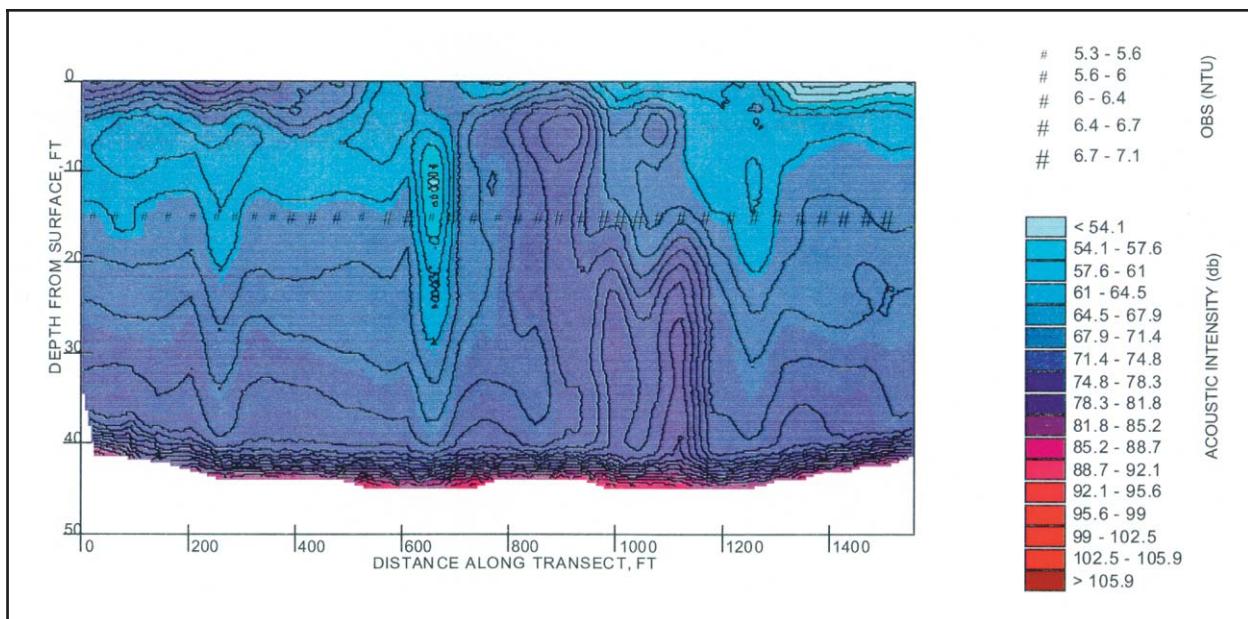


Figure B4. Relative acoustic intensity and OBS readings, Line 303, 1641 EST, Brandywine Range - Reach 1, 09/15/98

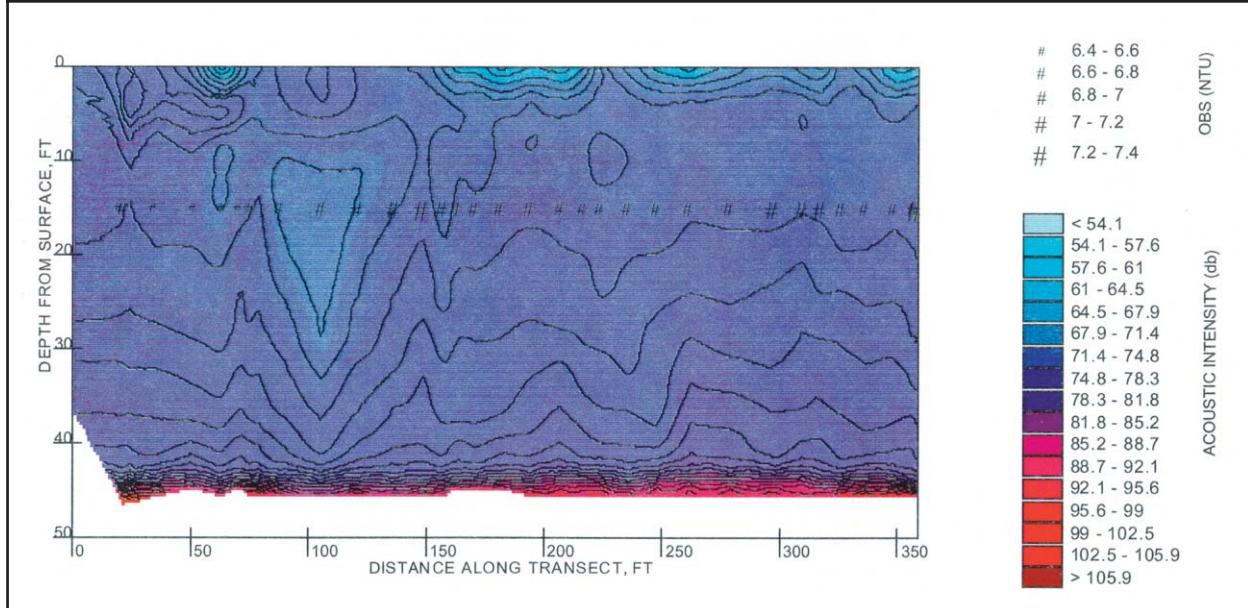


Figure B5. Relative acoustic intensity and OBS readings, Line 113, 1938 EST, Brandywine Range - Reach 1, 09/15/98

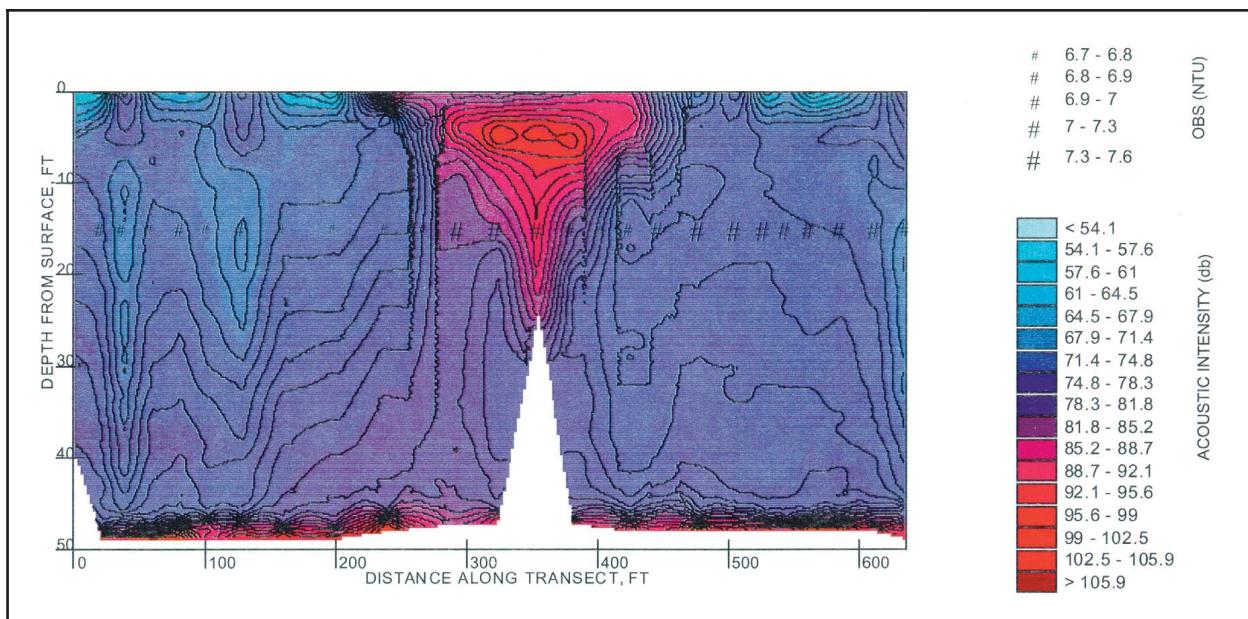


Figure B6. Relative acoustic intensity and OBS readings, Line 217, 1953 EST, Brandywine Range - Reach 1, 09/15/98

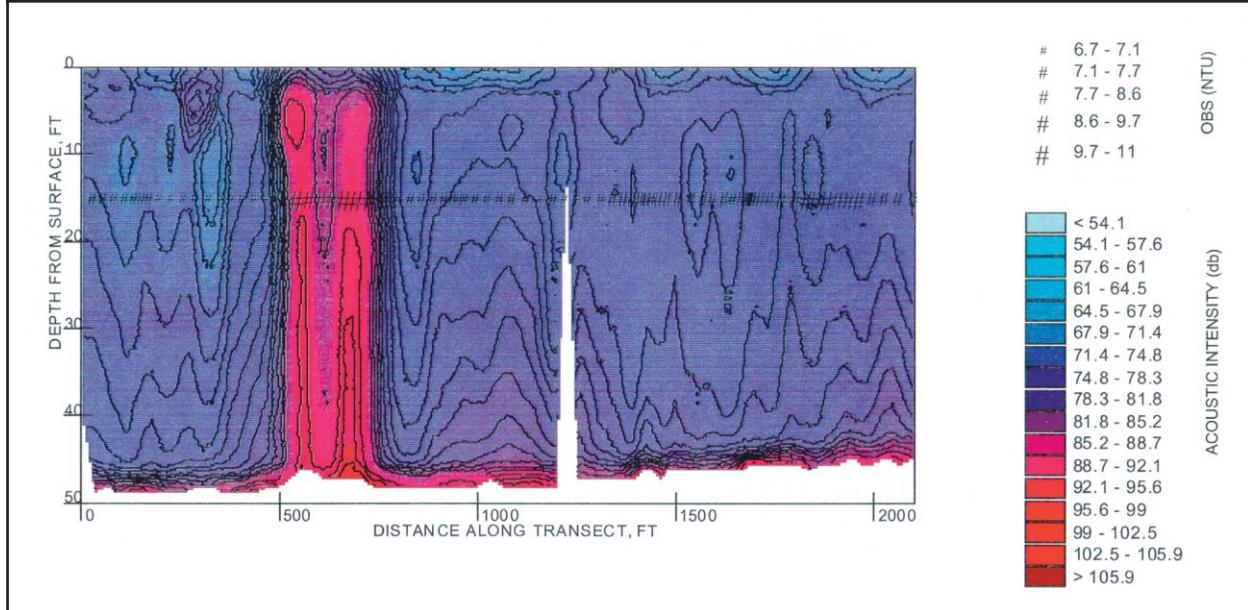


Figure B7. Relative acoustic intensity and OBS readings, Line 119, 1957 EST, Brandywine Range - Reach 1, 09/15/98

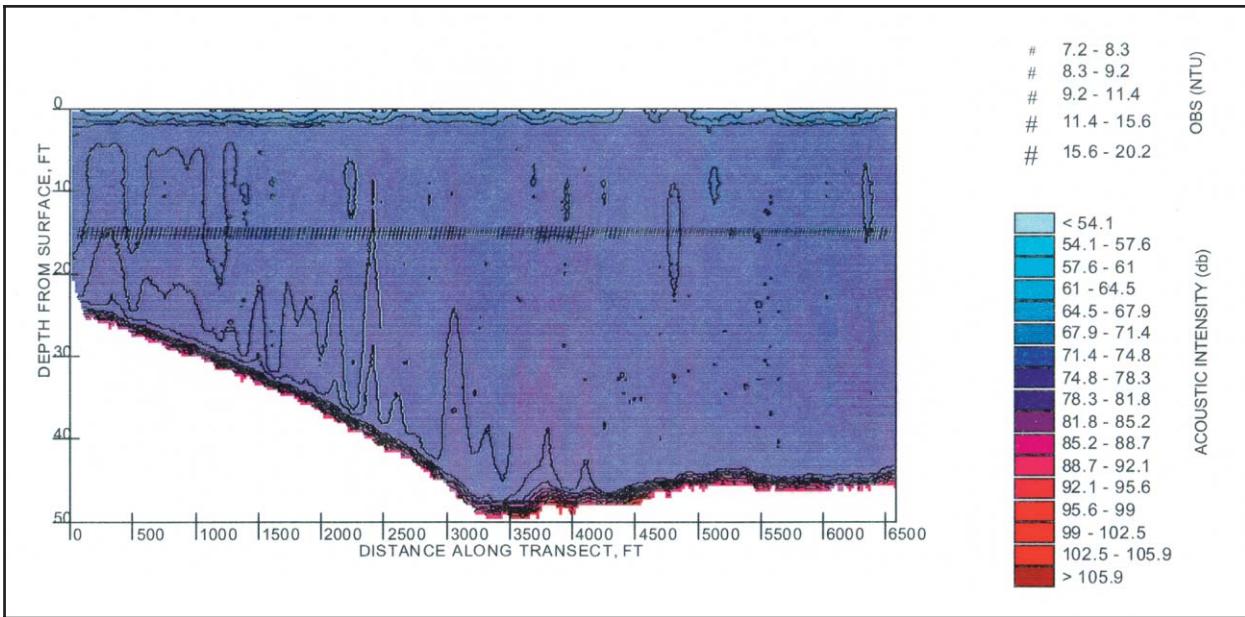


Figure B8. Relative acoustic intensity and OBS readings, Line 115, 2050 EST, Brandywine Range - Reach 1, 09/15/98

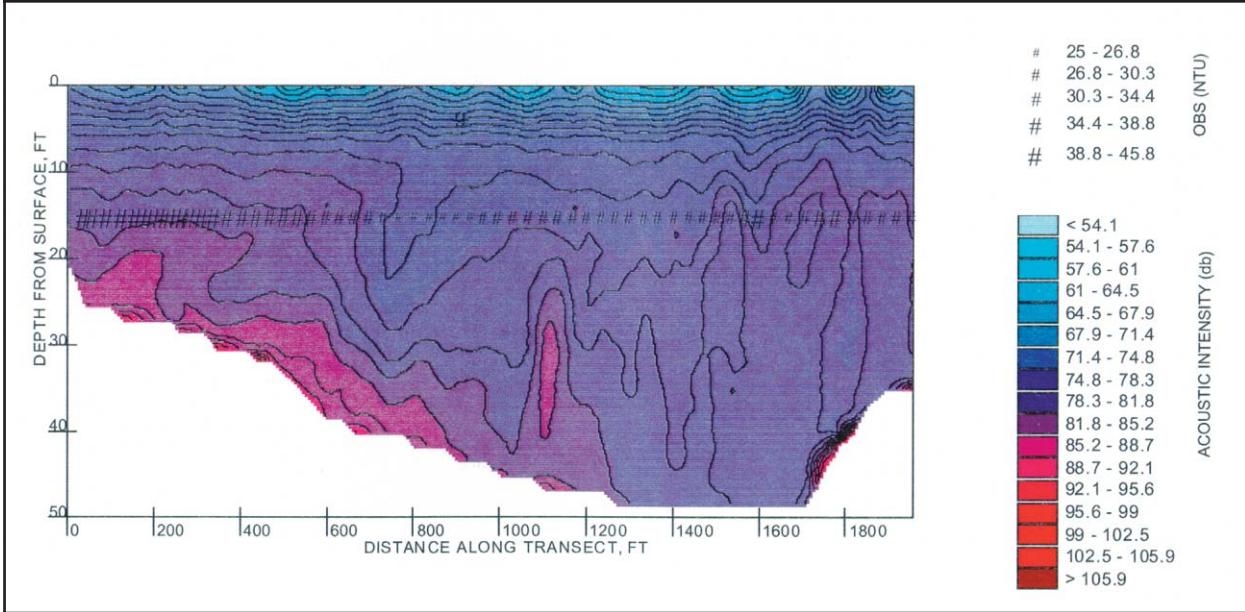


Figure B9. Relative acoustic intensity and OBS readings, Line 18, 1404 EST, Deepwater Point Range - Reach 2, 09/16/98

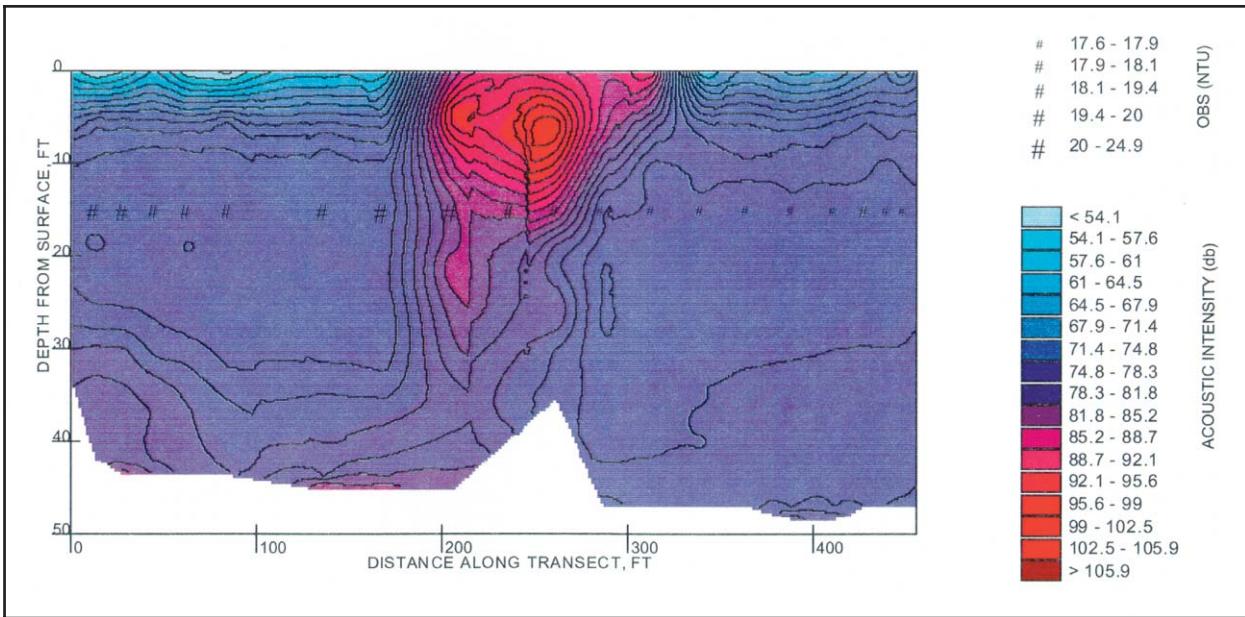


Figure B10. Relative acoustic intensity and OBS readings, Line 118, 1459 EST, Deepwater Point Range - Reach 2, 09/16/98

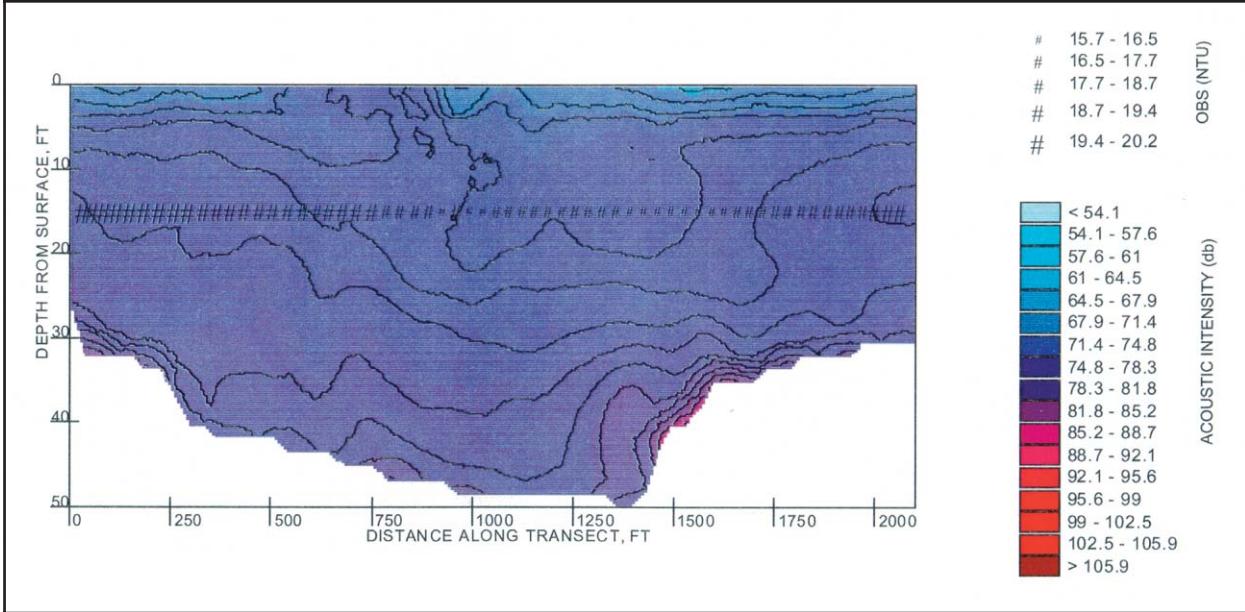


Figure B11. Relative acoustic intensity and OBS readings, Line 224, 1518 EST, Deepwater Point Range - Reach 2, 09/16/98

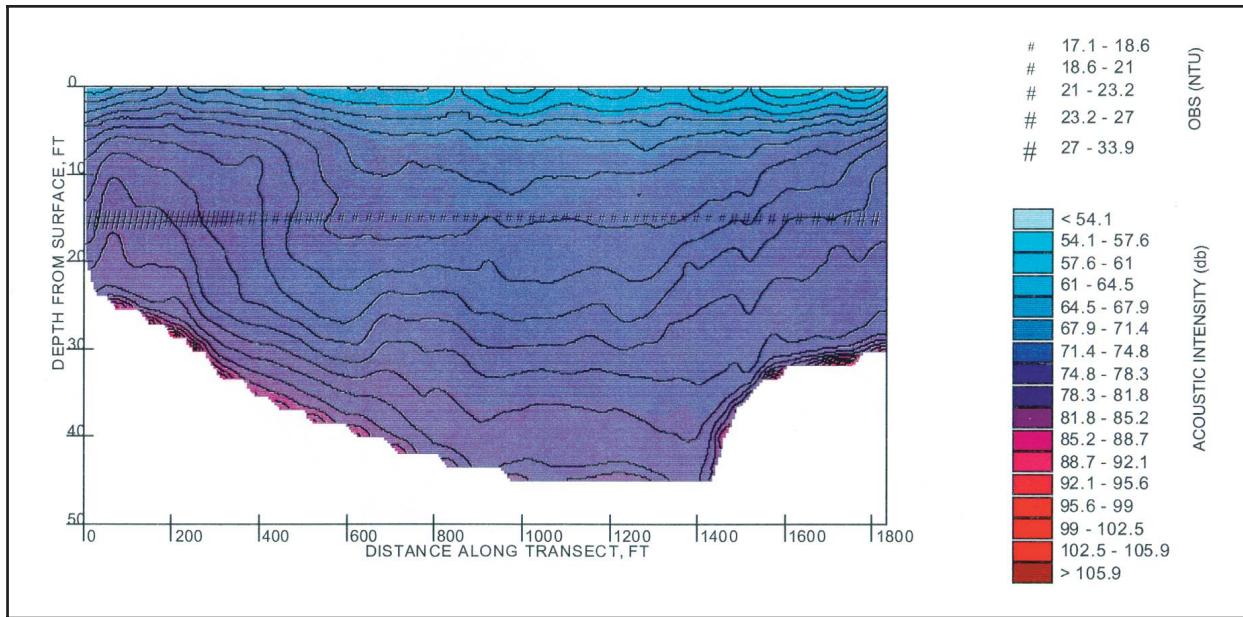


Figure B12. Relative acoustic intensity and OBS readings, Line 14, 1730 EST, Deepwater Point Range - Reach 2, 09/16/98

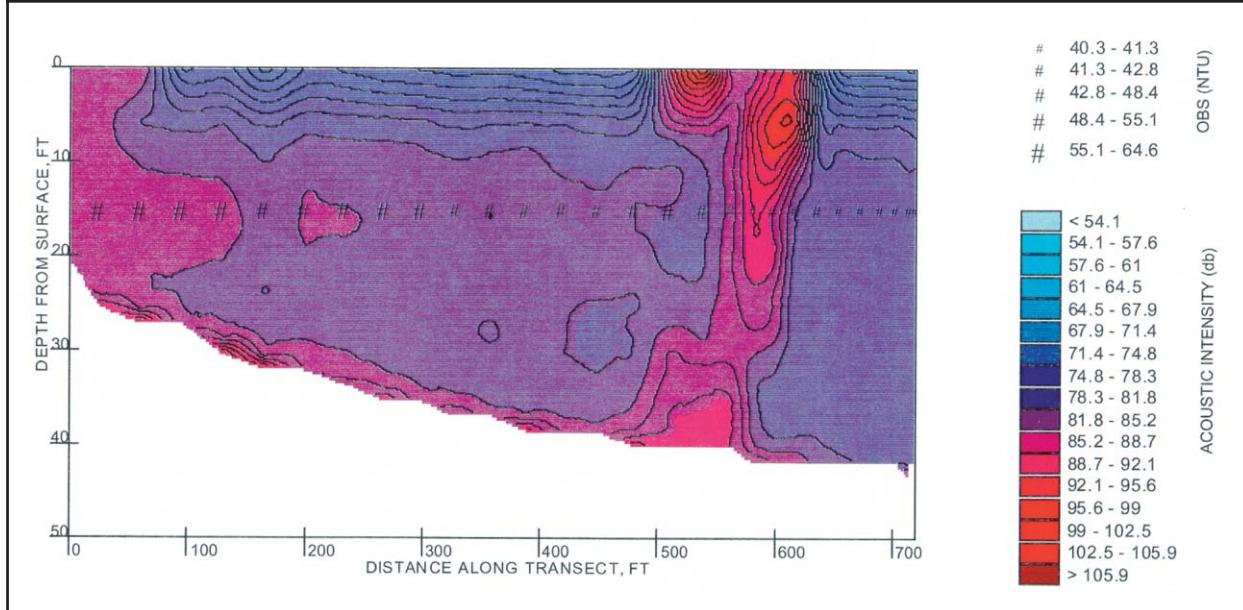


Figure B13. Relative acoustic intensity and OBS readings, Line 9, 1818 EST, Deepwater Point Range - Reach 2, 09/16/98

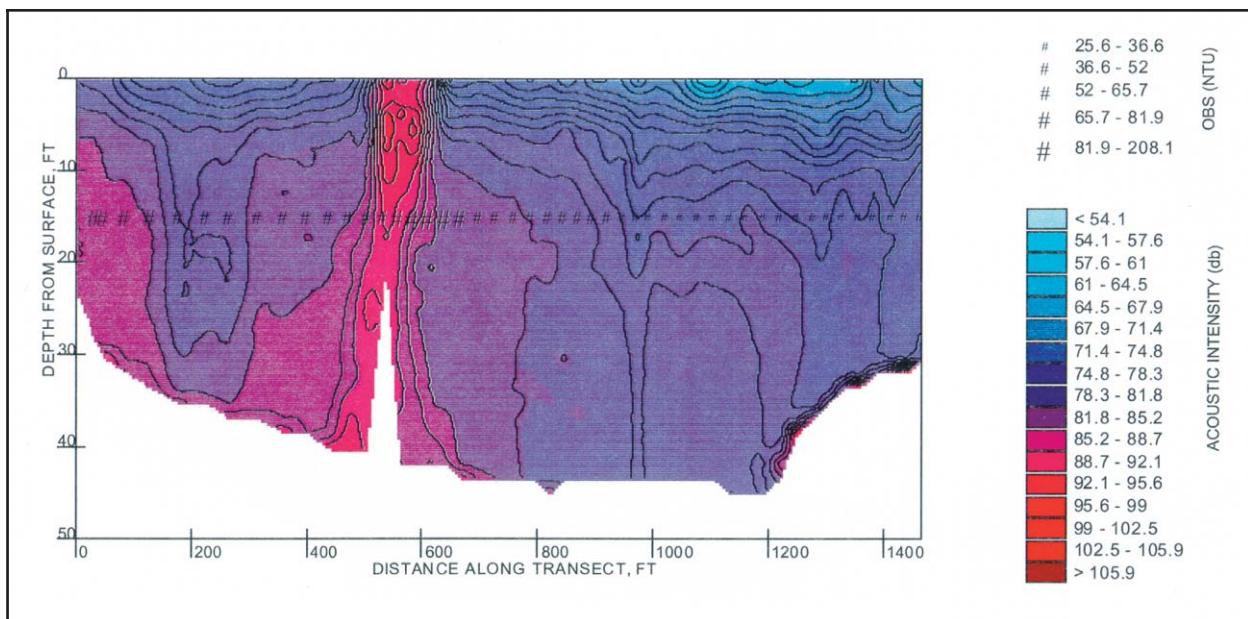


Figure B14. Relative acoustic intensity and OBS readings, Line 15, 1832 EST, Deepwater Point Range - Reach 2, 09/16/98

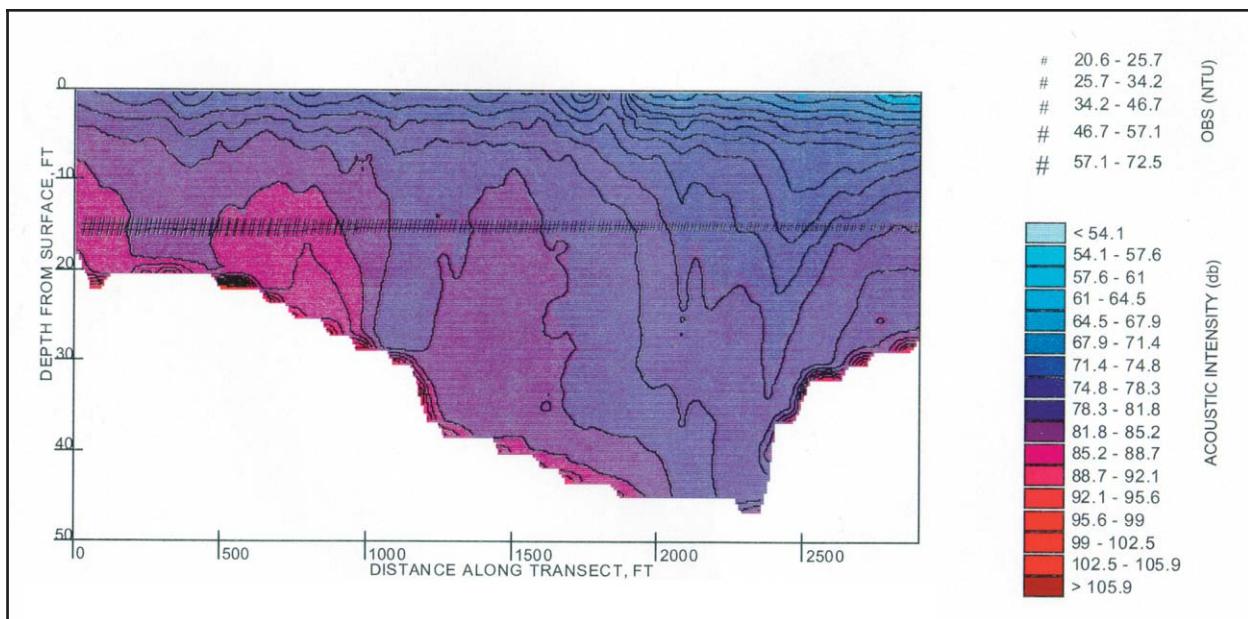


Figure B15. Relative acoustic intensity and OBS readings, Line 324, 2020 EST, Deepwater Point Range - Reach 2, 09/16/98

and horizontal dimensions of the sediment plume immediately behind the dredge. Figure B4 shows the level of suspended material in the water column 8 min following the dredge's passing, indicating that background levels of suspended material are returning to the site. No lateral dispersion of the plume out of channel was observed during the nonoverflow dredging operation.

Figures B5 through B8 illustrate the residence time of the sediment plume created with hopper-overflow conditions during dredging operations in Reach 1. Background levels of suspended materials prior to the dredging operations are shown in Figure B5. The vertical and horizontal dimensions of the sediment plume immediately behind the dredge while hopper over-flow conditions are occurring are shown in Figure B6. Plume dimensions 4 min after the dredge passed are shown in Figure B7. A wider transect was performed, as seen in the horizontal distance scale, to determine the lateral extent of the plume. No significant change above background levels could be detected. At 1 hr elapsed time following the end of the overflow dredging operation, the levels of suspended material had returned to background conditions as shown in Figure B8. Again, no lateral dispersion of the plume out of the channel area was observed.

Figures B9 through B11 illustrate the residence time of the sediment plume created from nonoverflow conditions during dredging operations in the Reach 2 area. At the beginning of the dredging operations, background suspended material levels are shown in Figure B9. The plume dimensions in the lateral and vertical directions immediately behind the dredge at the start of dredging operations are shown in Figure B10. After an elapsed time of 19 min (Figure B11), following the end of dredging operations, the levels of suspended material had returned to background conditions. During this dredging operation, the tidal flow in the dredging area had reversed from flood flow to ebb flow conditions. This accounts for the relative change in background levels seen between Figure B9 and Figure B11. Despite the changes in background levels resulting from the change in direction of flow in the dredging area, no lateral movement of the plume beyond the channel limits was observed.

Figures B12 through B15 illustrate the residence time of the dredge plume resulting from hopper overflow dredging conditions in the Reach 2 area. Background levels prior to dredging operations are shown in Figure B12. The sediment plume dimensions immediately behind the dredge prior to overflow conditions can be seen in Figure B13. Note the increase in the suspended material levels within the first 400 ft of the transect. The increase in these levels can be attributed to the increase in the ebb flow velocities and the resulting disturbance of bottom materials from near bottom velocities and not dredge plume dispersion. When hopper-overflow conditions began, another transect was performed located immediately behind the dredge as shown in Figure B14. The width of the transect was also increased, as indicated in the length of the horizontal distance scale, to observe the lateral extent of the dispersion of the dredge plume. After an elapsed time of 1 hr following the completion of the overflow dredging

operation, Figure B15 indicates that the levels of suspended materials had returned to background conditions. Note the increase in sediment disturbance near the bottom in the shallow portions of the transect which are due to the increase in the velocities during the ebb cycle of the tide. As in the previous dredge operations, no lateral dispersion of the dredge plume beyond the channel limits was observed.

The OBS data shown in Figures B2 through B15 were used to see if there is a correlation between the relative acoustic backscatter from the ADCP with different levels of turbidity for the OBS sensor. The figures indicate a fairly good correlation as increases in the ADCP relative acoustic intensities correspond to similar increases in the turbidity levels from the OBS sensor. Since the OBS sensor was deployed at a fixed depth, relative changes in turbidity throughout the water column were not measured.

Equipment Description

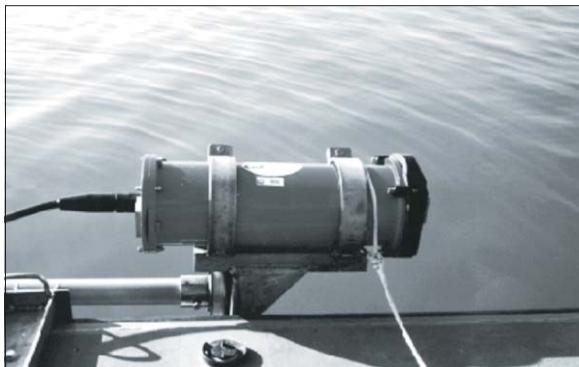


Figure B16. Acoustic Doppler Current Profiler



Figure B17. Vessel-mounted ADCP

Acoustic Doppler Current Profiler (ADCP)

Acoustic techniques are used to obtain current velocity and direction measurements for fast and accurate profiling in the field. The equipment used was a boat-mounted RD Instruments BroadBand Acoustic Doppler Current Profiler (ADCP) as shown in Figure B16. The RD instruments operating frequency was 1,200 kHz. The equipment can be mounted over the side of boat with the acoustic transducers submerged and data is collected while the vessel is underway as shown in Figure B17.

The ADCP transmits sound bursts into the water column which are scattered back to the instrument by particulate matter suspended in the flowing water. The ADCP sensors listen for the returning signal and assigns depths and velocity to the received signal based on the change in the frequency caused by the moving particles. This change in frequency is referred to as a Doppler shift.

The ADCP is also capable of measuring vessel direction, current direction, water temperature, and bottom depth. Communication with the instrument for setup and data recording are performed with a portable computer using manufacturer supplied software, hardware, and communication cables. The manufacturer stated accuracies for current speed measurement ± 0.2 cm/sec; for vessel direction, ± 2 deg; and for temperature, ± 5 °F.

OBS Sensors

The OBS sensor, a product of D&A Instruments and Engineering, is a type of nephelometer for measuring turbidity and solids concentrations by detecting scattered infrared light from suspended matter. It consists of a high-intensity infrared emitting diode (IRED), a series of silicon photodiodes as detector and linear solid state temperature transducer. The IRED emits a beam at angles 50 deg in the axial plane and 30 deg in the radial plane to detect suspended particles by sensing the radiation they scatter, as shown in Figure B18. Scattering by particles is a strong function of the angle between the path of radiation from the sensor through the water and the signal return to the detector. OBS sensors detect only radiation scattered at angles greater than 140 deg. As with other optical turbidity sensors, the response of the OBS sensor depends on the size distribution, composition, and shape of particles suspended in the medium being monitored. For this reason, sensors must be calibrated with suspended solids from the waters being monitored. The OBS sensor is interfaced with Coastal Leasing, Inc., MicroLite solid-state microprocessor that controls samples, averaging, and data storage. The MicroLite uses Wizard portable PC software to provide user-friendly control of the instrument.

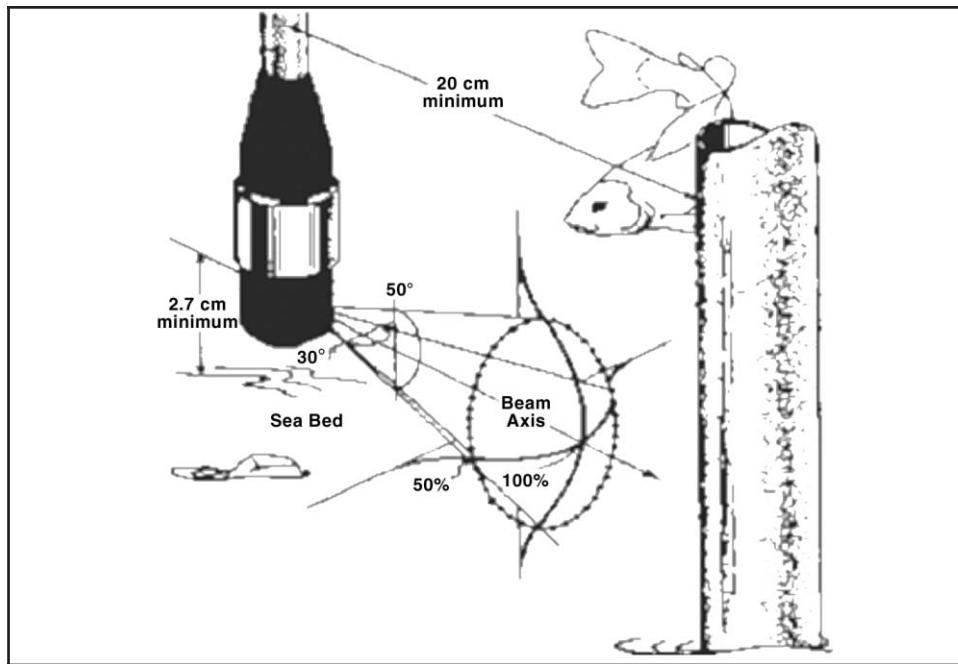


Figure B18. OBS sensor beam pattern

Tethered-drag sampler

The Tethered-drag sampler is basically a 76-mm- (3-in.-) diam pipe cut on a 45-deg angle with a shackle mounted on one side. The sampler is

thrown over the side and dragged along the bottom. The sample accumulates inside the pipe. Samples are removed, inspected, and packaged in plastic bags or jars for further analysis once returned to ERDC. The Tethered-drag sampler is displayed in Figure B19.



Figure B19. Tethered-drag sampler

Pumped water samples

Water samples are obtained by pumping the sample from the desired depth to the surface collection point via a portable sampling pump. The pumping system consists of a 6-mm- (1/4-in.-) ID plastic tubing attached to a weighted “fish” for support. The weight is lowered by cable from a winch with a depth indicator. The opening of the sampling tubing is attached to a solid suspension bar above the weight and is pointed into the flow. A 12-V DC pump is used to move the water through the tubing to the deck of the boat where each sample is then collected in appropriate glass or plastic containers. The pump and tubing are flushed for approximately 1 min at each depth before collecting the sample.

Appendix C

Detection of Short-Term Sedimentation During Hopper Dredging Operations in Delaware Bay and the Delaware River¹



US Army Corps of Engineers
Waterways Experiment Station
Vicksburg, MS 39180

February 1999

Detection of Short-Term Sedimentation During Hopper Dredging Operations in Delaware Bay and the Delaware River

by *Robert J. Diaz*
R. J. Diaz and Daughters
P. O. Box 114
Ware Neck, Virginia 23178

and

Douglas G. Clarke
Coastal Ecology Branch
U.S. Army Engineer Waterways Experiment Station

¹ Adapted from unpublished draft report, Robert J. Diaz and Douglas G. Clarke, February 1999, R. J. Diaz and Daughters, Ware Neck, VA, and Coastal Ecology Branch, U.S. Army Engineer Waterways Experiment Station, Vicksburg, MS

Introduction

Navigation channel maintenance dredging projects employing hopper dredges can produce substantial water-column turbidity when in situ sediments contain a high proportion of fines and overflow practices are used. Most of the sediment resuspended during overflow operations has been shown to settle within several hundred meters of the channel (Nichols, Diaz, and Schaffner 1990; Clarke et al. 1990). It has been hypothesized that even short-term pulses in sedimentation rates induced by overflow operations could negatively impact sensitive living resources, such as oyster beds, in the vicinity of dredged channels.

Detection and measurement of recently deposited thin layers of dredged material can be a severe technical challenge. Sediment overburdens with thicknesses on the scale of several millimeters can potentially raise concern for biological impacts. Precision bathymetry methods using acoustic technologies lack the sensitivity to detect low-density thin overburdens less than 5 to 10 cm thick, at best. However, direct in situ observations of very thin layers have effectively been done with sediment profile imaging (SPI). Nichols, Diaz, and Schaffner (1990) demonstrated that SPI techniques could detect thin layers of sediment deposited from hopper dredge overflow operations in the Chesapeake Bay. SPI has also proven to be very effective in mapping the distribution of thin layers resulting from open-water dredged material disposal operations in Mobile Bay (Diaz, Schaffner, and Kiley 1987a; Diaz and Schaffner 1988; Clarke and Miller-Way 1992), Mississippi Sound (Diaz, Schaffner, and Kiley 1987b), and Long Island Sound (Morton, Parker, and Richmond 1985).

The primary focus of this study was to determine if short-term sedimentation of dredged material occurred as a consequence of resuspension by the dragheads or during overflow from the hopper dredge. A secondary objective, should sedimentation be detected in sediment profile images, was to determine the distances from the navigation channel at which measurable sedimentation occurred. Two areas were selected by the U.S. Army Engineer District, Philadelphia (CENAP), for conduct of the hopper dredging operations tests (Figure C1). These locations represent a relatively open-water site in the Delaware bay, designated the Lower Study site (LS), and a more riverine site in the Delaware River, designated the Upper Study site (US).

Materials and Methods

Field methods

On 15 and 16 September 1998, sediment profile images were collected at a series of stations at the two predetermined locations in Delaware Bay

and the Delaware River (LS and US, respectively). SPI data were successfully collected at stations in the LS site (Figure C2) and stations in the US site (Figure C3). At each station a Hulcher Model Wrenn sediment profile camera was deployed. During each deployment the profile camera obtained two images (Fujichrome 100P 35-mm slides) at 5 and 15 sec after bottom contact. The two-image sequence helps to ensure that when deployment occurs in soft, unconsolidated sediments the sediment-water interface is captured in the image before the camera prism optical window descends too deeply into the substrate.

Stations were located based on considerations of prevailing wind, river discharge, and/or tidal flow conditions at the time of each hopper dredge test. At both study locations data were collected first while the dredge was operating without overflow, followed by a second test with overflow. Sampling proceeded for up to 2 hr after dredging ceased.

Image analysis

The sediment profile images were first analyzed visually by projecting the images and recording all features seen into a preformatted, standardized spread sheet file. The images were then digitized using a Polaroid Sprint Scan 35 Plus scanner and analyzed using Adobe Photoshop and NTIS Image programs. Steps in the computer analysis of each image were standardized consistent with procedures described in Viles and Diaz (1991). Data from each image were sequentially saved to a spread sheet file for later analysis. Details of how these data were obtained can be found in Diaz and Schaffner (1988) and Rhoads and Germano (1986), and in the standardized image analysis procedures of Viles and Diaz (1991).

Results and Discussion

SPI images from a total of 14 stations were analyzed from the LS site (Figure C2) and 41 stations from the US site (Figure C3). The approximate location of the hopper dredge in proximity to the sampling stations is shown in Figures C2 and C3. The LS site was sampled on 15 September from 1958 to 2208 hr. Tidal flows were flooding during the sampling period and winds were approximately 24 to 32 kph (15 to 20 mph) out of the east. Sea conditions were marginal for successful deployment of the camera system, with approximate wave heights of 0.6 to 0.9 m (2 to 3 ft). The US site was sampled on 16 September 1998 from 1507 to 2102 hr. This reach of the Delaware River is influenced by tidal currents, which were ebbing during the sampling period. Sea conditions were mild with wave heights less than 0.6 m (2 ft) throughout the sampling period.

Presented below are explanations of each of the parameters produced from analysis of SPI images and an overview of observations of physical and biological features at the two study sites. Complete listings of visual

and computer analysis data for each study site are given in Tables C1 and C2.

Prism penetration

This parameter provided a geotechnical estimate of sediment compaction, with the profile camera prism acting as a dead weight penetrometer. The depth of prism penetration is therefore related to the “softness” or degree of sediment compaction or water content. Penetration was simply measured as the distance the sediment interface moved up the 23-cm length of the prism optical window as captured by the 15-sec image. The weight of the camera frame was kept constant at 43 kg (95 lb) in order to allow comparisons of relative sediment compaction between stations.

Sand bottoms typical of the LS site had comparatively shallow penetration depths, ranging from 0.0 to 10.9 cm (Table C1). When sandy sediments are poorly sorted, as was the case at channel station LS-09 (Figure C4), prism penetration was deeper. Silty-clay sediments prominent at the US site had comparatively deep penetration (loosely compacted) values, ranging from 9.8 to 25.0 cm (Table C2). Compacted clay sediments, as indicated by very shallow penetration, can be seen in the image from station US-14 (Figure C5).

Surface relief

Surface relief or boundary roughness was measured as the difference between the maximum and minimum distance (relative to the sediment-water interface) the prism penetrated and provided qualitative and quantitative data on habitat characteristics useful for evaluating existing conditions. Small-scale bed roughness on the order of the width (15 cm) of the prism optical window can be estimated from the images. Factors contributing to observed roughness can often be inferred from visual analysis of the images.

In the open-water setting of the sandy LS site, physical factors (e.g., water current and wave generated turbulence) obviously dominated local sediment processes. Surface relief was typically present as small bed forms (e.g., LS-13, Figure C6) that ranged from 0.6 to 2.0 cm (Table C1). In contrast, the muddy habitats of the US site were primarily influenced by biological features, including mounds, pits, and tubes formed from the biogenic activity of benthic organisms (e.g., US-35, Figure C7). Here surface relief values ranged from 0.4 to 3.5 cm (Table C2).

Apparent color redox potential discontinuity layer

This parameter has been determined to be an important estimator of benthic habitat quality (Rhoads and Germano 1986, Diaz and Schaffner 1988), providing an estimate of the depth to which sediments are oxidized. The

term “apparent” is used in describing this parameter because no direct chemical measurement is made of the redox potential. Rather an assumption is made that, given the complexities of iron and sulfate reduction-oxidation chemistry, reddish/greenish-brown sediment color tones (Diaz and Schaffner 1988) are indicative of oxic sediments, whereas reduced sediments have gray to black color tones. This is in accordance with the classical concept of redox potential discontinuity (RPD) depth, which associates RPD with sediment color (Fenchel 1969, Vismann 1991).

The depth of the apparent color RPD was defined as the area of all the pixels in the image discerned as being oxidized divided by the width of the digitized image. The area of the image with oxic sediment was obtained by digitally manipulating the image to enhance characteristics associated with oxic sediment (reddish/greenish-brown color tones). The enhanced area was then measured from a density slice of the image.

The apparent color RPD has been a very useful parameter in assessing the quality of a benthic habitat for infauna and epifauna from both physical and biological perspectives. Rhoads and Germano (1986); Revelas, Rhoads, and Germano (1987); Day, Schaffner, and Diaz (1988); Diaz and Schaffner (1988); Valente et al. (1992); and Bonsdorff et al. (1996) all found the depth of the RPD from profile images to be directly correlated to the quality of the benthic habitat in polyhaline and mesohaline estuarine zones. Controlling for differences in sediment type, habitats with relatively thin (<5 mm) RPD layers tend to be associated with some type of environmental stress. In contrast, habitats with relatively deep RPD values (>2 cm) usually have flourishing infaunal and epifaunal communities.

Porous sandy sediments (e.g., LS-09, Figure C4) and silty-clay sediments with evidence of high levels of biological activity (e.g., US-11, Figure C8) had the deepest RPD measurements in this study. Shallowest RPD measurements were associated with images that had signs of physical disturbance, possibly dredging related (e.g., LS-06, Figure C9), or were compact clays (e.g., US-33, Figure C10). In the LS site, average RPD depth ranged from 0.7 to 5.3 cm, and from 0.1 to 6.6 cm in the US site (Tables C1 and C2).

Sediment grain size

Grain size is an important parameter for determining the nature of the physical forces acting on a sedimentary habitat. Grain size is also a major factor in determining benthic community structure (Rhoads 1974). The sediment type descriptors used for image analysis follow the Wentworth classification as described in Folk (1974) and represent the major modal class for each image. Grain size was determined by comparison of collected images with a set of standard images for which mean grain size had been determined in the laboratory.

Grain size ranged from medium-sand gravel (e.g., US-21, Figure C11) to clay (e.g., US-35, Figure C7). Traces of sand were also seen at a few fine-grained stations (e.g., US-29, Figure C12) and traces of fines at coarse-grained stations (e.g., US-32, Figure C13). Within study site variation in sediment type for the LS site was low, with the modal grain size being fine-medium-sand (e.g., LS-03, Figure C14). Shell hash was a major component of sediments in the LS site, particularly in the navigation channel (e.g., LS-06, Figure C9) (Table C1). In the US site sediments were more variable with the modal grain size being clay (e.g., US-09, Figure C4), which was closely followed by silty-clay (e.g., US-09, Figure C15). In addition to having finer sediments than the LS site, there was little evidence of shell hash in US site sediments (Table C2).

Near-bottom turbidity

The sediment profiling camera is also able to image water column turbidity immediately above the sediment-water interface. Light from the camera prism's internal strobe illuminates suspended sediment particles and allows qualitative estimation of turbidity. Turbidity was categorized as low (if the water column was clear with little or no suspended sediment, e.g., LS-02, Figure C16), moderate (e.g., US-09, Figure C15), and high (e.g., US-14, Figure C5). If plumes of resuspended sediment derived from either of the dragheads of overflow were present at the sampling station, the camera would capture the near-bottom turbidity. Such turbidity can be distinguished from other sources, such as that frequently caused by camera frame contact with the substrate, by color tones. Dredge-induced turbidity has a gray color because the bulk of the sediments dredged are from the anoxic zone and in a reduced redox chemical state. Reduced iron and manganese sulfide compounds are dark gray to black in color which contrasts well with the reddish to brown color tones of their oxidized compounds. Background turbidity or that caused by the camera frame landing on the bottom would be brown in color because the suspended sediments were disturbed from the uppermost few millimeters of surficial sediments, which are typically in an oxic redox state.

Two stations in the LS site (LS-07 and LS-12, Figures C17 and C18) had grayish colored suspended material. Station LS-07 was located on the edge of the navigation channel and could have been affected by passage of the dragheads. This station was occupied prior to initiation of overflow. LS-12 was located in the channel and appeared to have been recently disturbed. All other LS images had brownish suspended materials (Table C2).

The relative amount of suspended material showed no pattern relative to the dredging operation at either LS or US site. In the US site, high levels of turbidity seemed associated with shoal areas (<5.5 m (<18 ft) deep) to the northwest of the channel (Figure C3). The four channel stations in the US site had low turbidity levels (Table C2). Only one of the four channel stations in the LS site had moderate turbidity, while the remaining three had low turbidities (Table C1).

Current scour

While sitting on the bottom, the prism and camera housing assembly present an obstruction to bottom currents. Deflection of currents can erode the sediment-water interface at the edges of the prism. This erosion can be seen in SPI images as small dips in the sediment-water interface at the edges of the image. When these dips occur, it is reasonable to assume that bottom currents at the time the image was taken were >10 cm/sec.

Evidence of scour was seen at three of the four channel stations in the LS site (e.g., LS-12, Figure C18) and one shoal station (LS-03, Figure C14) (Table C1). In the US site only one of the 41 stations (US-31, on the channel edge, Figure C19) showed evidence of scour (Table C2). Scour patterns indicated that bottom currents are likely stronger in the LS site relative to the US site.

Dredged material

When recently deposited, dredged sediments from hopper overflow or open-water disposal are distinct in color from background sediments (Diaz and Schaffner 1988; Nichols, Diaz, and Schaffner 1990), being grayer than background sediments. This is the result of in general, the more advanced diagenic state of deep sediments being dredged (Rhoads, SAIC, personal communication, as discussed in section on Near-Bottom Turbidity).

SPI images from three of the four channel stations in the LS site appear to be recently disturbed and likely dredged material (e.g., LS-06, Figure C9) (Table C1). The channel sediments are sands with shell hash that contain little fine sediment. It is not likely that the surface sediments are from hopper overflow, but more likely associated with disturbance from the dragheads. In addition, the test dredging and overflow were not of sufficient quantity or duration to produce extensive layering from sands.

No station from the US site appeared to have recently deposited dredged material. Sediments at all US site stations appeared to be undisturbed and representative of background conditions.

Sediment layering

Sediment layering as indicated by color or grain-size changes are readily seen in SPI images. The presence of layers is indicative of physical disturbances or episodic events. Sediment layering is characteristic of hopper overflow and open-water disposal operations and can be readily seen in SPI images (Diaz and Schaffner 1988; Nichols, Diaz, and Schaffner 1990).

In the LS site four stations had evidence of layering from grain-size changes (Table C1). Station LS-06 (Figure C9), in the channel, had a shell hash layer at 1.6 cm from the sediment surface. The other three stations,

LS-11 (Figure C20) and LS-13 (Figure C6) on the edge of the channel and LS-10 (Figure C21) on the shoal near the channel, all had thin layers of sandy sediments overlaying silty sediments. Each case seemed indicative of recently deposited sediments, possibly from the dragheads or current induced transport of surface sands. The sediments were not likely from hopper overflow operations since little sand-size sediment would have been discharged from the hopper during a single loading process.

In the US site about half of the stations had sediment layers (Table C2). However, none of the four stations in the channel had sediment layering. About half of the stations (8 of 17) on the edge of the channel had layers, three with color layering and five with grain-size layering. All five of the grain-size layered channel edge stations had sands on the surface overlying clayey sediments. Since the sediments in the channel were fine silts and clays, it is unlikely that layers observed in these images were attributable to the dredging operations or overflow, which contained little or no sand. In addition, grain-size layered channel edge stations US-22 (Figure C22), US-23 (Figure C23), and US-33 (Figure C10) had amphipod and/or worm tubes which could not have reestablished living positions in the approximately 1-hr interval between dredging operations and sampling. Color layering was represented by varying hues of grays and was found deeper in the sediments, ranging from 2.5 to 9.0 cm from the surface (Table C2). These deeper color layers are not likely a result of recent dredging operations and may represent episodic events such as seasonal high river discharges or storm deposits. Detritus appeared to be mixed into the uppermost sediment layer at shoal stations US-09 (Figure C15), US-10 (Figure C24), and US-11 (Figure C8).

Surface features

Surface features include a variety of physical and biological parameters, each providing different information on the type of habitat and its quality for supporting benthic species. The presence of certain features is indicative of the overall nature of a habitat. For example, bed forms are always associated with physically dominated habitats, whereas the presence of worm tubes or feeding pits would be indicative of a more biologically accommodated habitat (Rhoads and Germano 1986, Diaz and Schaffner 1988). Surface features were visually evaluated from each image and compiled by type and frequency of occurrence.

The sediment surface at stations in the LS site was dominated by bed forms and shell hash (Table C1). In the US site, biogenic pits and mounds were the dominant surface features (Table C2). No epifauna were seen in either area. Flock layers, thin layers of unconsolidated sediments, occurred at six shoal stations (e.g., US-09, Figure C15) and one channel edge station (US-34, Figure C25) in the US site (Table C2). All flock layers appeared to be composed of background sediments and not dredged material, as evidenced by their respective color tones.

Tubes were seen at only one of the LS site stations (LS-11, Figure C20). At the US site stations, worm or amphipod tubes occurred at 12 of 41 stations (Table C2). Amphipod tube mats occurred at US-05 (Figure C26), US-06 (Figure C27), and US-22 (Figure C22), which were channel and channel edge stations.

Subsurface features

These parameters include a wide variety of features and provide insights into physical and biological processes influencing the bottom. For example, the presence of methane gas voids has been an indication of anaerobic metabolism (Rhoads and Germano 1986) and associated with high rates of bacterial activity. Muddy habitats with large amounts of methane gas are generally associated with areas of oxygen stress or high organic loading. On the other hand, habitats with burrows, infaunal feeding voids, and/or actual infauna visible in SPI images are generally more biologically accommodated and considered “healthy” (Rhoads and Germano 1986, Diaz and Schaffner 1988, Valente et al. 1992). Subsurface features were visually evaluated from each image and compiled by type and frequency of occurrence.

No infauna, burrows, or voids were seen at the LS site stations (Table C1). This was the result, in part, of the prevalence of coarse sediments, which are not generally associated with fauna that form burrows or voids, and by shallow camera prism penetration.

In the US site, 4 stations had infaunal organisms, 12 had active burrows, 2 had active feeding voids, and 3 had anaerobic voids (Table C2). Gas filled voids occurred at nine stations and were abundant at most of these stations (e.g., US-26, Figure C28), indicating relatively high concentrations of organic matter in the sediments. Evidence of hydrocarbon contamination was seen at station US-03 (Figure C29) in the form of “oil spots.” Diaz et al. (1993) found that sediments containing high concentrations of hydrocarbons had a unique signature in the SPI images and that this signature was significantly related to the occurrence of hydrocarbons.

Summary and Conclusions

The LS site was more physically accommodated than the US site which was more biologically accommodated (Table C3). Sediments in the LS site were coarser and had more shell hash than the US site which was characterized by finer sediments and more biologically reworked.

There was evidence that recent physical disturbance had occurred at several of the LS stations (LS-06, LS-09, LS-12), possibly a result of the dredging operations. Gray colored suspended material, indicative of hopper overflow material, was also observed at two stations (LS-07, LS-12).

However, since this gray suspended material was also associated with recently disturbed sediments at LS-12, it could also have resulted from draghead activity. This leaves LS-07 as the station with the clearest signature of hopper overflow, but this was in the form of turbidity and not accumulation of overflow material on the sediment surface. Four LS stations had layering from grain-size changes. Station LS-06, in the channel, had a shell hash layer at 1.6 cm from the sediment surface. The other stations, LS-11 and LS-13 on the edge of the channel and LS-10 on the shoal near the channel, all had thin layers of sandy sediments overlying silty sediments. Although such layers are indicative of recently deposited sediments, those seen in the SPI images are likely the result of normal sediment transport processes rather than hopper overflow operations. Little sand would be discharged from overflow in a single pass of the hopper dredge.

In the US site, no evidence of recent physical disturbance was detected at any of the stations, but material that could have come from the hopper overflow was observed at one station (US-33). About half of the US stations had sediment layers, but none of the stations in the channel had sediment layers. About half of the stations on the edge of the channel had layers, three with color layering and five with grain-size layering. All five of the sediment layered channel edge stations had sands on the surface overlaying clayey sediments. Since the sediments in the channel were finer silts and clays, it was unlikely that the layers at the channel edge stations were the result of the dredging operations. In addition, sediment layered channel edge stations US-22, US-23, and US-33 had amphipod and/or worm tubes which could not have reestablished living position in the short interval between dredging and sampling. Flocculent sediment layers, thin layers of unconsolidated surface sediments, occurred at six shoal stations and one channel edge station in the US site. Based on their color tones, all flock layers appeared to be composed of background sediments and not hopper overflow or dredged material. Evidence of hydrocarbon contamination was seen at station US-03 in the form of “oil spots.”

No indication of newly deposited dredged material was observed at stations outside the edge of the navigation channel at either study site. Although the sampling station coverage was not extensive, given the relatively short duration of the tests, the risk of significant sedimentation as a consequence of the hopper dredging operations appears largely restricted to the bottom and slide slopes of the channel.

Literature Cited

- Bonsdorff, E., Diaz, R. J., Rosenberg, R. Norkko, A., and Cutter, G. R. (1996). “Characterization of soft-bottom benthic habitats of the Aland Islands, northern Baltic Sea,” *Marine Ecology Progress Series* 142, 235-245.

- Clarke, D. G., Homziak, J., Lazor, R. L., Palermo, M. R., Banks, G. E., Benson, H. A., Johnson, B. H., Smith-Dozier, T., Revelas, G., and Dardeau, M. R. (1990). "Engineering design and environmental assessment of dredged material from hydraulically filled hopper barges in Mobile Bay, Alabama," Dredging Operations Technical Support Program Miscellaneous Paper D-90-4, U.S. Army Engineer Waterways Experiment Station, Vicksburg, MS.
- Clarke, D. G., and Miller-Way, T. (1992). "An environmental assessment of the effects of open-water disposal of maintenance dredged material on benthic resources in Mobile Bay, Alabama," Dredging Operations Technical Support Program Miscellaneous Paper D-92-1, U.S. Army Engineer Waterways Experiment Station, Vicksburg, MS.
- Day, M. E., Schaffner, L. C., and Diaz, R. J. (1988). "Long Island Sound sediment quality survey and analyses," Tetra Tec, Report to NOAA, NOS, OMA, Rockville, MD.
- Diaz, R. J., Schaffner, L. C., and Kiley, K. (1987a). "Sediment profile camera survey of the Fowl River open-water dredged material disposal area, Mobile Bay, Alabama," Virginia Institute of Marine Science Contract Report to Taxonomic Associates, Mobile, AL.
- _____. (1987b). "Sediment profile camera survey of the Gulfport, Mississippi, open-water dredged material disposal site," Science Applications International Inc. Report No. SAIC-88/5703-176 to Taxonomic Associates, Mobile, AL.
- Diaz, R. J., and Schaffner, L. C. (1988). "Comparison of sediment landscapes in the Chesapeake Bay as seen by surface and profile imaging." *Understanding the estuary; Advances in Chesapeake Bay research*. M. P. Lynch and E. C. Krome, ed., Chesapeake Research Consortium Publication 129, CBP/TRS 24/88, 222-240.
- Diaz, R. J., Hannsson, L. J., Rosenberg, R., Gapcynski, P., and Unger, M. (1993). "Rapid assessment of sedimentological and biological characteristics of a hydrocarbon pollution gradient," *Water, Air and Soil Pollution* 66, 251-266.
- Fenchel, T. (1969). "The ecology of marine microbenthos. IV. Structure and function of the benthic ecosystem, its chemical and physical factors and microfauna communities with special reference to the ciliated Protozoa," *Ophelia* 6, 1-182.
- Folk, R. L. (1974). *Petrology of Sedimentary Rocks*. Hemphill's, Austin, TX.

- Morton, R. W., Parker, J. H., and Richmond, W. H. (1985). "DAMOS. Summary of program results, 1981-1984," Science Applications International Inc. Report No. SAIC-84/7521-C46 to the U.S. Army Engineer Division, New England, Waltham, MA.
- Nichols, M. M., Diaz, R. J., and Schaffner, L. C. (1990). "Effects of hopper dredging and sediment dispersion, Chesapeake Bay," *Environmental Geology and Water Science* 15, 31-43.
- Revelas, E. C., Rhoads, D. C., and Germano, J. D. (1987). "San Francisco Bay sediment quality survey and analysis," NOAA Technical Memorandum NOS OMA 35, Rockville, MD.
- Rhoads, D. C. (1974). "Organism B sediment relations on the muddy sea floor," *Oceanography and Marine Biology Annual Review* 12, 263-300.
- Rhoads, D. C., and Germano, J. D. (1982). "Characterization of organism-sediment relations using sediment profile imaging: An efficient method of remote ecological monitoring of the sea floor (REMOTS system)," *Marine Ecology Progress Series* 8, 115-128.
- _____. (1986). "Interpreting long-term changes in benthic community structure: A new protocol," *Hydrobiologia* 142, 291-308.
- Valente, R. M., Rhoads, D. C., Germano, J. D., and Cabelli, V. J. (1992). "Mapping of benthic enrichment patterns in Narragansett Bay, Rhode Island," *Estuaries* 15, 1-17.
- Viles, C., and Diaz, R. J. (1991). "Bencore, an image analysis system for measuring sediment profile camera slides," School of Marine Science, Virginia Institute of Marine Science, College of William and Mary, Gloucester Point, VA.
- Vismann, B. (1991). "Sulfide tolerance: Physiological mechanisms and ecological implications," *Ophelia* 34, 1-27.

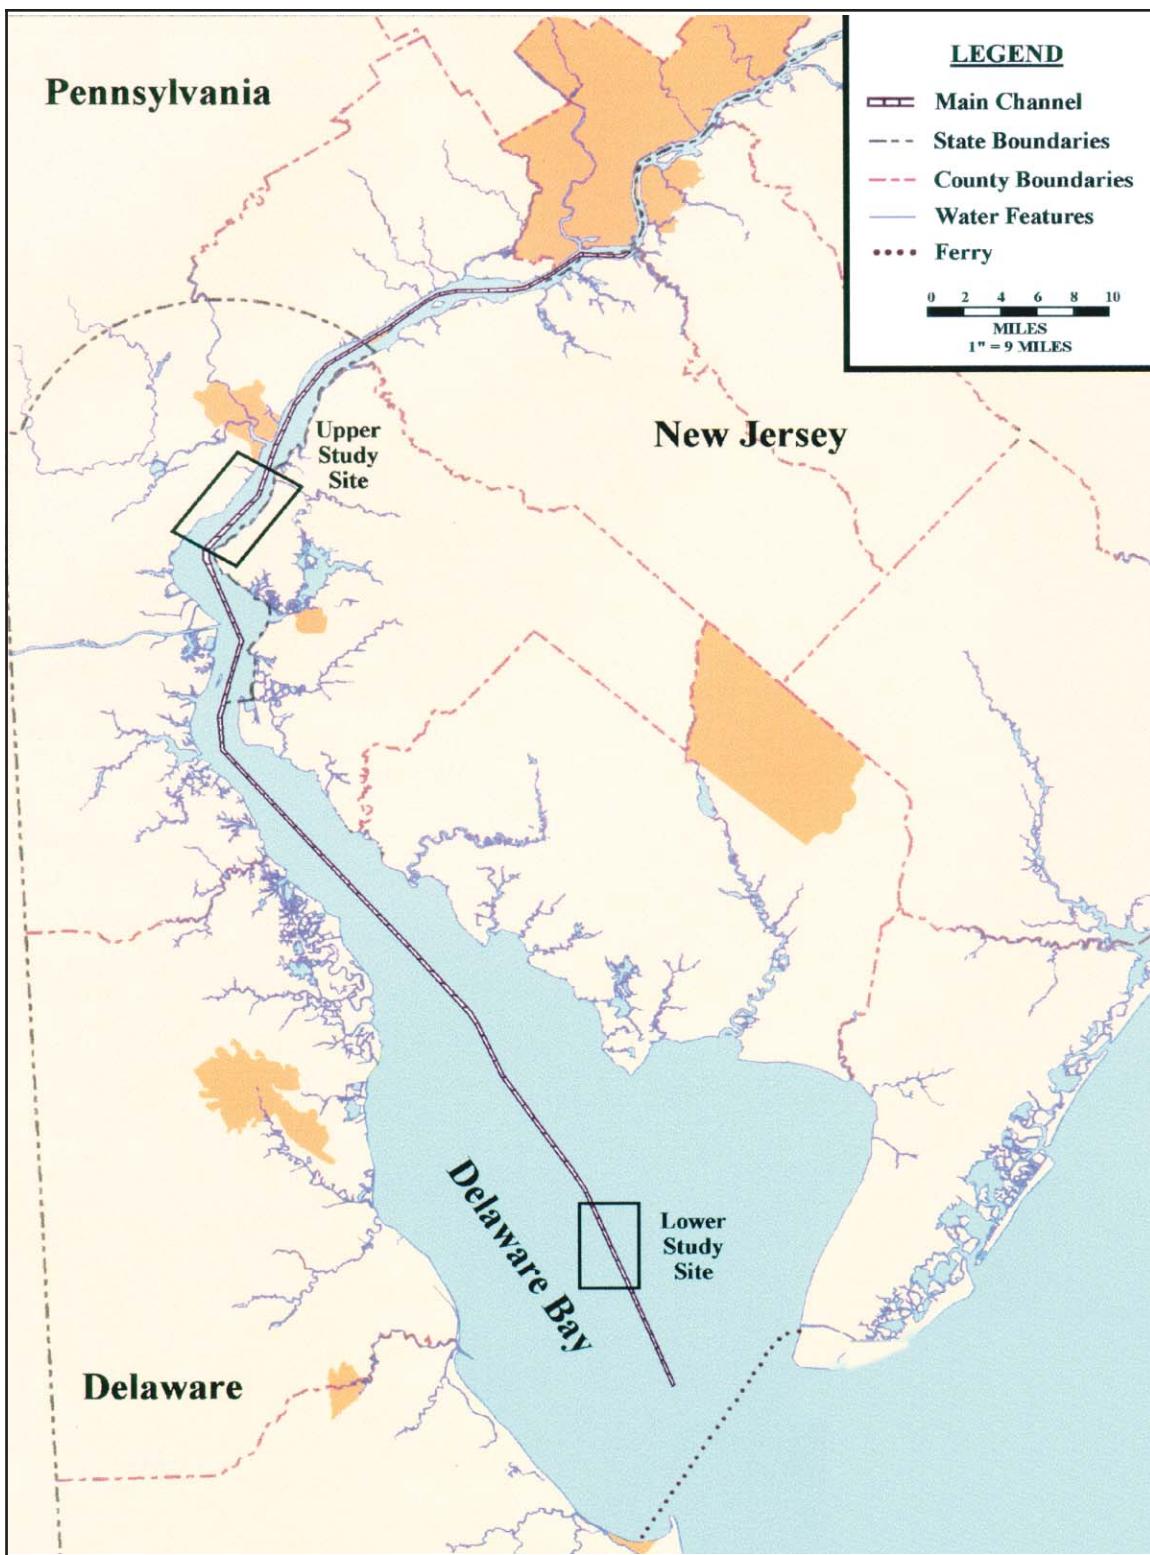


Figure C1. Locations of the lower and upper hopper dredge overflow test study sites

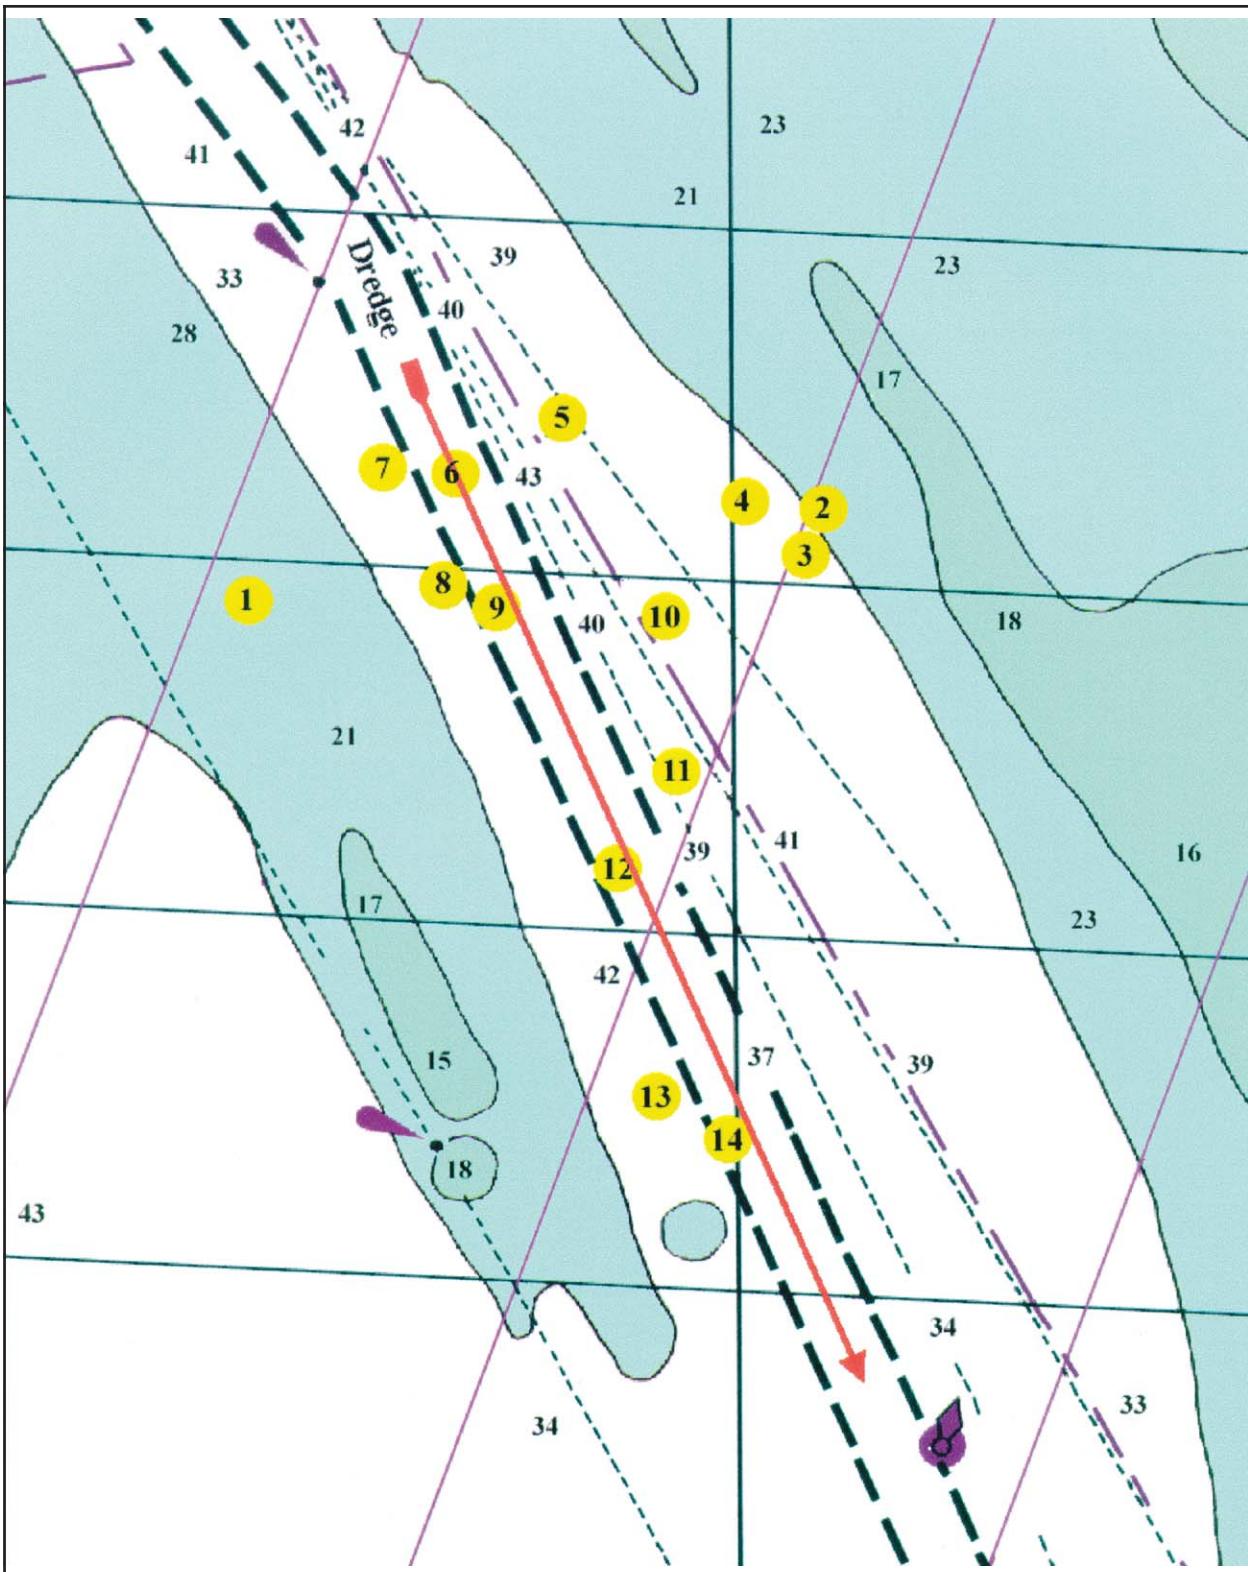


Figure C2. Sediment profiling imagery stations occupied during hopper dredge loading and overflow tests at the LS site. The figure has been modified from a NOAA navigation chart with depths indicated in feet. Approximate start and end of test locations of the dredge are indicated by the red arrow

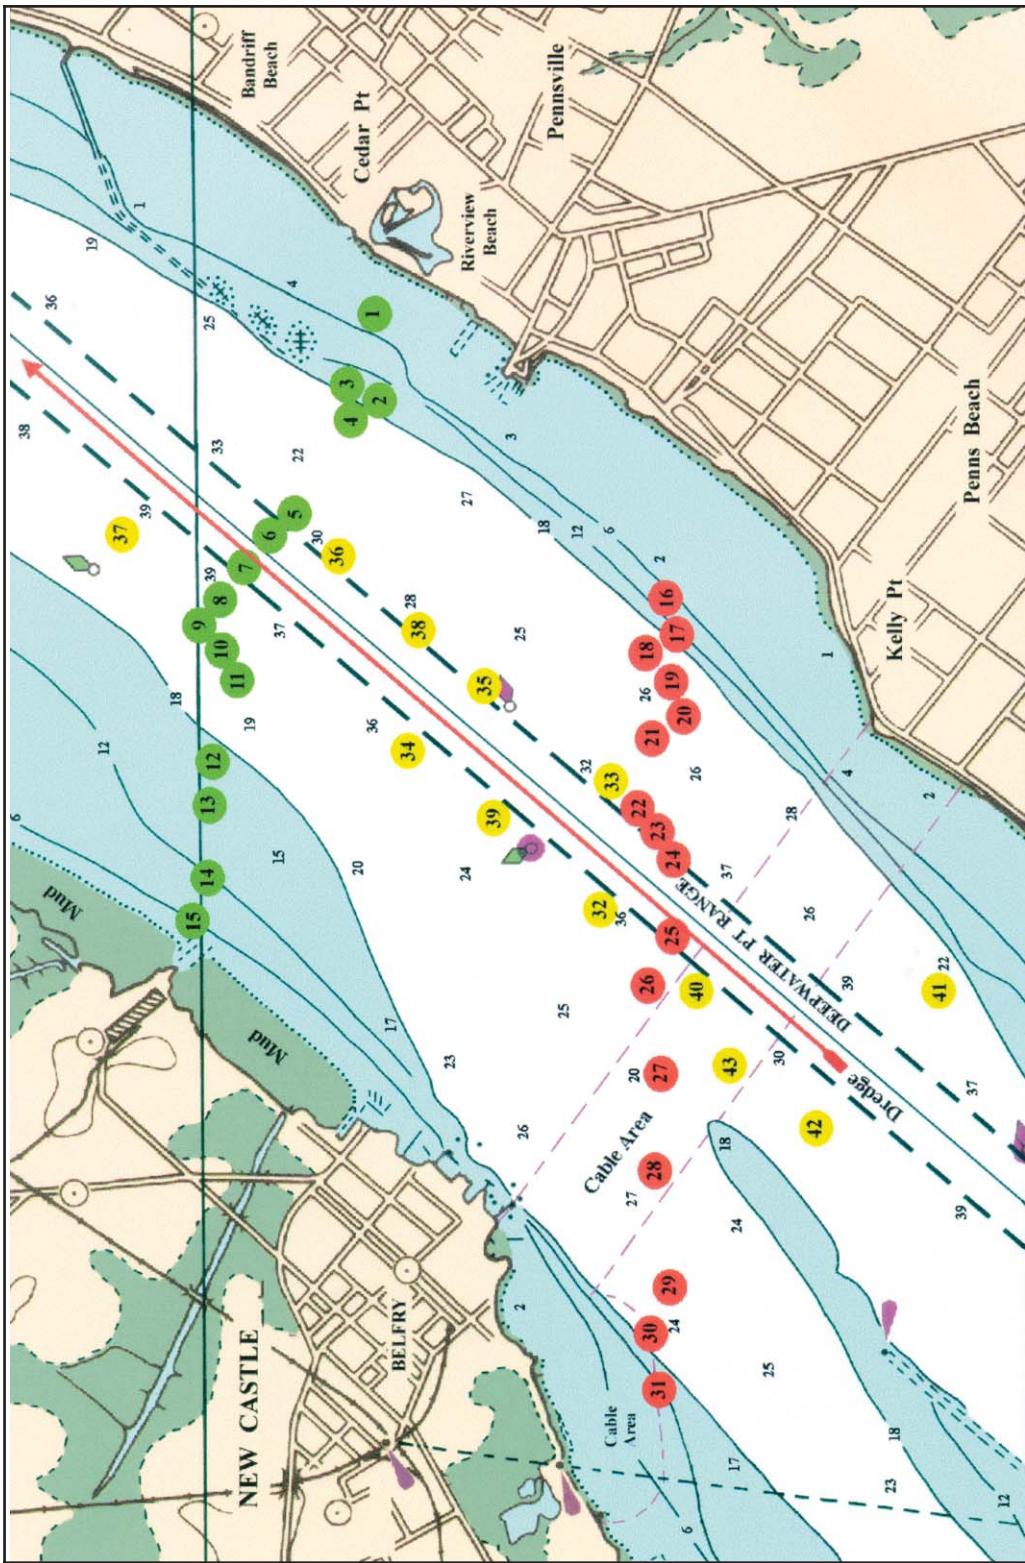


Figure C3. Sediment profiling imagery stations occupied during hopper dredge loading and overflow tests at the upper study site. Green stations (1-15) are predredging stations, red stations (16-31) are during-dredging without overflow stations, and yellow stations (32-43) are during and postoverflow stations. The figure has been modified from a NOAA navigation chart with depths indicated in feet. Approximate start and end of test locations of the dredge are indicated by the red arrow.



Figure C4. SPI image of Lower Study Site Station LS-09



Figure C5. SPI image of Upper Study Site Station US-14



Figure C6. SPI image of Lower Study Site Station LS-13



Figure C7. SPI image of Upper Study Site Station US-35



Figure C8. SPI image of Upper Study Site Station US-11



Figure C9. SPI image of Lower Study Site Station LS-06



Figure C10. SPI image of Upper Study Site Station US-33



Figure C11. SPI image of Upper Study Site Station US-21



Figure C12. SPI image of Upper Study Site Station US-29



Figure C13. SPI image of Upper Study Site Station US-32



Figure C14. SPI image of Lower Study Site Station LS-03



Figure C15. SPI image of Upper Study Site Station US-09



Figure C16. SPI image of Lower Study Site Station LS-02



Figure C17. SPI image of Lower Study Site Station LS-07



Figure C18. SPI image of Lower Study Site Station LS-12



Figure C19. SPI image of Upper Study Site Station US-31



Figure C20. SPI image of Lower Study Site Station LS-11



Figure C21. SPI image of Lower Study Site Station LS-10

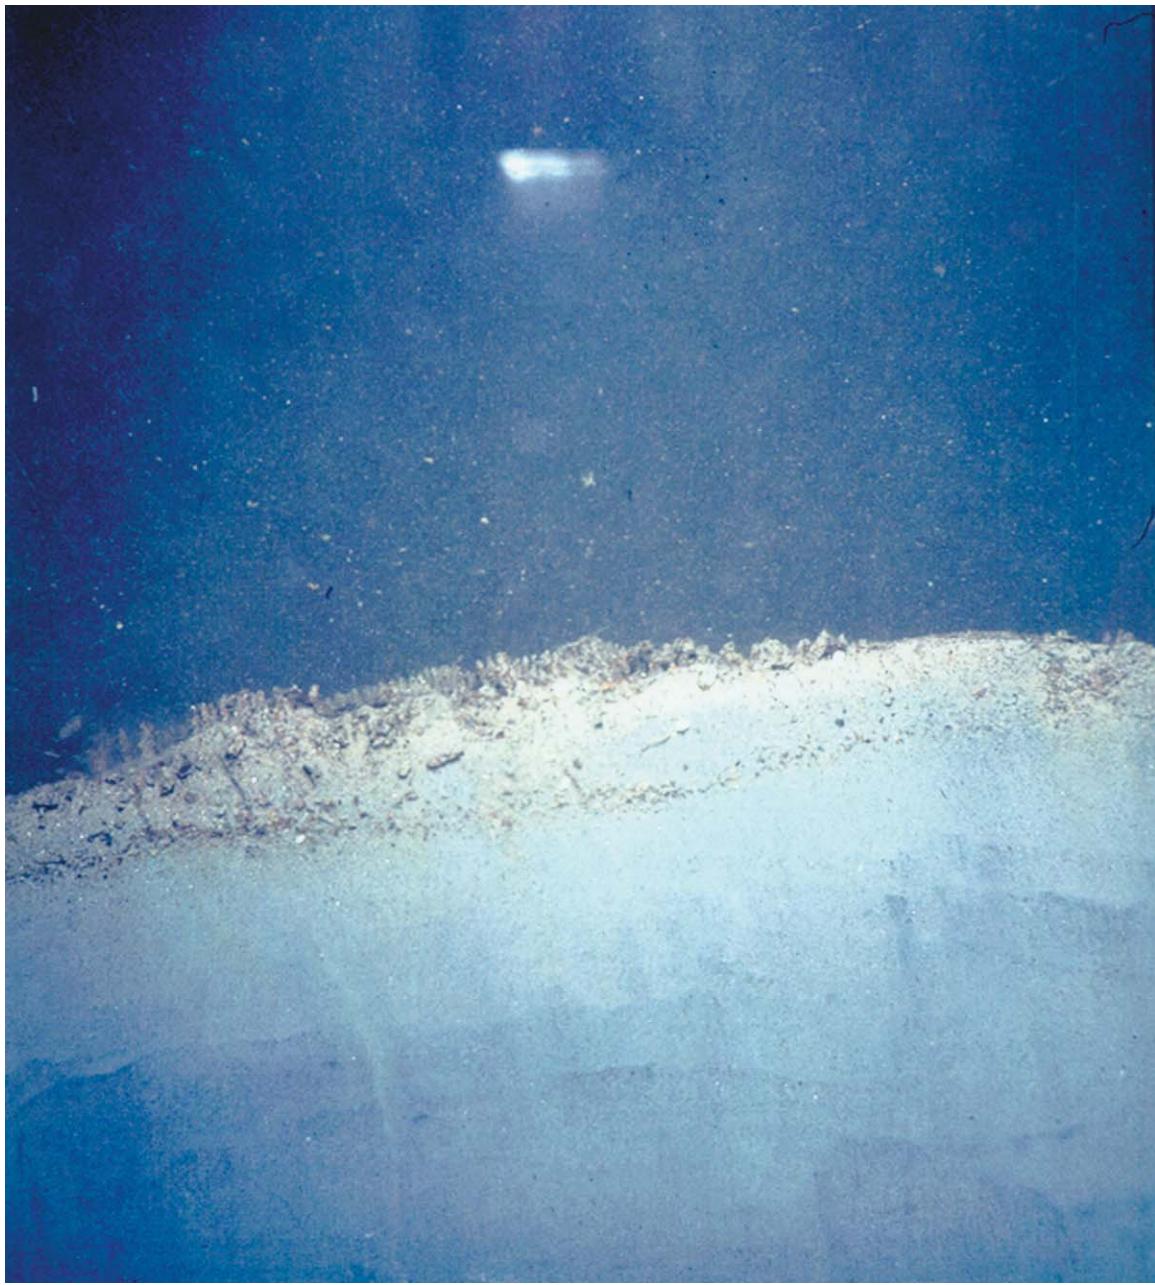


Figure C22. SPI image of Upper Study Site Station US-22

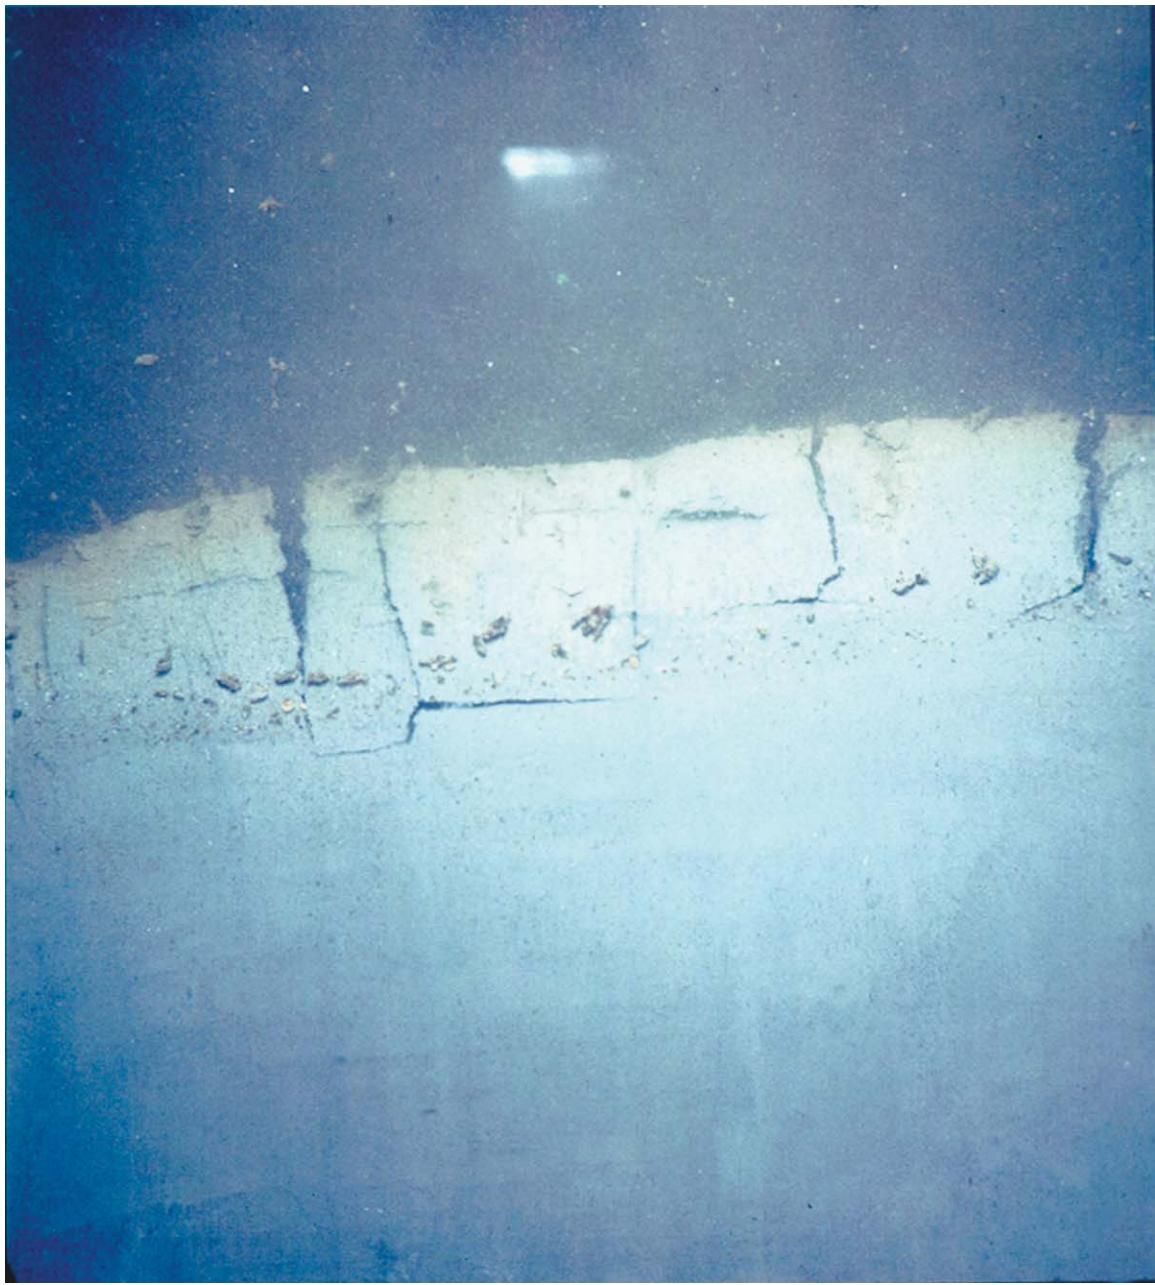


Figure C23. SPI image of Upper Study Site Station US-23



Figure C24. SPI image of Upper Study Site Station US-10



Figure C25. SPI image of Upper Study Site Station US-34



Figure C26. SPI image of Upper Study Site Station US-05



Figure C27. SPI image of Upper Study Site Station US-06



Figure C28. SPI image of Upper Study Site Station US-26



Figure C29. SPI image of Upper Study Site Station US-03

Table C1
SPI Data from the Lower Study (LS) Site in Delaware Bay, September 1998

Sta	Descriptor	Penetration (cm)			Surface Relief cm	Sediment Type	Turbidity	Suspended Sediment Color	Current Scour	Dredged Material	Sediment Layers	Surface Features	Tubes	Worms	Burrows	Voids
		Min	Max	Ave												
1	Shoal	0.8	1.7	1.3	0.9	>1.3	FSMS	Little	Brown	No	0	BED,SH	None	0	0	0
2	Shoal	3.3	4.1	3.7	0.8	>3.6	FSMS	Little	Brown	No	0	BED,SH	None	0	0	0
3	Shoal	6.1	8.0	7.0	1.8	2.9	FSMS	Moderate	Brown	Yes	No	0	BED,SH	None	0	0
4	Shoal	2.5	4.1	3.3	1.6	1.6	FS	Moderate	Brown	No	0	BED,SH	None	0	0	0
5	Shoal	0.0	0.0	0.0	-	FS	Little	Brown	No	No	-	BED,SH	None	-	-	-
6	Channel	5.7	6.3	6.0	0.6	0.7	FSMSSH	Moderate	Brown	Yes	1	SH,DIST	None	0	0	0
7	Edge	0.0	1.3	0.7	1.3	>0.7	FSSH	Low	Gray	No	-	BED,SH	None	-	-	-
8	Edge	1.6	2.5	2.0	0.8	>2.0	FSMSSH	Low	Brown	No	0	BED,SH	Some	0	0	0
9	Channel	9.8	11.9	10.9	2.0	5.3	FSMSSH	Low	Brown	Yes	0	SCOUR	None	0	0	0
10	Shoal	2.6	3.2	2.9	0.6	0.8	FS/SI	Low	Brown	No	1	BED,MD,SH	None	0	0	0
11	Edge	2.5	4.4	3.4	2.0	2.7	FSMS/SI	Low	Brown	No	1	BED,MD,SH	Few	0	0	0
12	Channel	3.3	4.1	3.7	0.8	2.9	FSMSSH	Low	Gray	Yes	0	SH	None	0	0	0
13	Edge	1.6	2.5	2.0	0.8	>2.0	FSMS/SI	Moderate	Brown	No	1	BED,SH	None	0	0	0
14	Channel	1.1	2.0	1.6	1.0	>1.6	FSMS	Low	Brown	No	0	BED,SH	None	0	0	0

Sta = Station, Descriptor = Location of station relative to navigation channel, CL = Clay, FS = Fine sand, FSMS = Fine to medium sand, GR = Gravel, SH = Shell hash, SI = Silt, SICL = Fine sand-silt-clay, SIFS = Silty fine sand, MSGR = Medium sand and gravel, / indicates sediments are layered, BED = Bedform, DIST = Disturbed, EVEN = Uniform flat surface, FLOC = Loose flocculent layer at surface, MD = Biogenic mound, PTT = Biogenic pit, FEW = 1 to 6, SOME = 7 to 24, MANY = >24, MAT = Tube mat

Table C2
SPI Data from the Upper Study (US) Site in the Delaware River, September 1998

Sta	Descriptor	Penetration (cm)			Ave RPD Depth cm	Sediment Type	Turbidity	Sus-pended Sediment Color	Current Scour	Dredged Material	Sediment Layers	Surface Features	Tubes	Worms	Burrows	Feeding/Gas Voids
		Min	Max	Ave												
1	Shoal	12.3	12.6	12.5	0.3	0.7	SI	Low	Brown	No	No	1	EVEN	None	0	4
2	Shoal	7.4	7.6	7.5	0.2	1.4	SI	Low	Brown	No	No	0	MD	None	0	5
3	Shoal	6.6	7.3	6.9	0.7	1.0	SI	Low	Brown	No	No	1	MD	None	2	3
4	Shoal	12.2	12.5	12.4	0.3	2.5	SI	High	Brown	No	No	2	MD	None	0	2
5	Edge	9.6	10.8	10.2	1.2	0.2	CL	Low	Brown	No	No	0	MD	Mat	0	0
6	Channel	12.3	13.4	12.9	1.1	0.4	CL	Low	Brown	No	No	0	MD	Mat	0	0
7	Channel	16.0	17.2	16.6	1.2	0.2	SICL	Low	Brown	No	No	0	PIT	None	0	0
8	Edge	20.2	21.6	20.9	1.5	-	SICL	High	Brown	No	No	0	PIT	None	0	0
9	Shoal	16.1	16.4	16.2	0.3	4.9	SICL	Moderate	Brown	No	No	1	FLOC	None	0	0
10	Shoal	9.2	10.3	9.8	1.1	2.3	SICL	Low	Brown	No	No	1	FLOC	None	0	0
11	Shoal	13.1	13.5	13.3	0.4	6.6	SICL	Moderate	Brown	No	No	1	FLOC	None	0	0
12	Shoal	9.0	9.3	9.2	0.3	0.7	CL	Low	Brown	No	No	1	MD	None	0	0
13	Shoal	2.5	6.6	4.5	4.1	-	CL	High	Brown	No	No	0	DIST	None	0	0
14	Shoal	1.5	3.0	2.2	1.5	0.3	CL	High	Brown	No	No	0	PB	None	0	1
15	Shoal	24.8	25.2	25.0	0.4	1.2	SICL	Moderate	Brown	No	No	1	PIT	None	1	0
16	Shoal	6.3	6.6	6.5	0.3	2.2	SI	High	Brown	No	No	1	PIT	None	0	0
17	Shoal	7.8	8.4	8.1	0.6	3.1	SI	Moderate	Brown	No	No	1	MD	None	0	2
18	Shoal	4.9	6.0	5.5	1.1	0.3	SIFS	High	Brown	No	No	1	PIT	None	1	5
19	Shoal	11.5	11.7	11.6	0.2	2.6	SI	Moderate	Brown	No	No	1	FLOC	None	0	2
20	Shoal	17.2	18.0	17.6	0.8	4.5	SI	High	Brown	No	No	2	FLOC	None	0	1
21	Shoal	14.8	18.3	16.5	3.5	2.5	MSGR/CL	Low	Brown	No	No	1	GR	Some	0	0
																2/0

(Continued)
 Sta = Station, Descriptor = Location of station relative to navigation channel, CL = Clay, FS = Fine sand, FMS = Fine to medium sand, GR = Gravel, SH = Shell hash, SI = Silt, SICL = Fine sand-silt-clay, SIFS = Silty fine sand, MSGR = Medium sand and gravel, indicates sediments are layered, BED = Bedform, DIST = Disturbed, EVEN = Uniform flat surface, FLOC = Loose flocculent layer at surface, MD = Biogenic mound, PB = Biogenic pit, FEW = 1 to 6, SOME = 7 to 24, MANY = >24, MAT = Tube mat

Table C2 (Concluded)

Sta	Descriptor	Penetration (cm)			Surface Relief cm	Ave RPD Depth cm	Sediment Type	Turbidity	Sus-pended Sediment Color	Current Scour	Dredged Material	Sediment Layers	Surface Features	Worms	Tubes	Burrows	Feeding/Gas Voids
		Min	Max	Ave													
22	Edge	6.2	8.0	7.1	1.8	0.6	FS/CL	Low	Brown	No	No	1	EVEN	Mat	0	0	0
23	Edge	9.5	11.1	10.3	1.6	0.7	FS/CL	Moderate	Brown	No	No	1	MD	Some	0	0	0
24	Channel	15.0	17.4	16.2	2.4	0.2	CL	Low	Brown	No	No	0	PIT	None	0	0	0
25	Channel	11.8	12.7	12.3	0.9	0.2	CL	Low	Brown	No	No	0	MD	FEW	0	0	0/25
26	Edge	14.5	15.0	14.8	0.5	0.2	SI	High	Brown	No	No	1	MD	None	1	3	0/40
27	Shoal																
28	Shoal																
29	Shoal	5.0	5.7	5.4	0.7	0.2	CL	High	Brown	No	No	0	PIT	None	0	0	0
30	Shoal	12.0	13.0	12.5	0.9	-	SI	High	Brown	No	No	2	DIST	None	0	0	0
31	Shoal	11.3	13.1	12.2	1.8	1.2	SICL	High	Brown	Yes	No	2	FLOC	None	0	0	1/10
32	Edge	2.3	3.9	3.1	1.6	>3.1	MS	Moderate	Brown	No	No	0	DED,GR	None	0	0	0
33	Edge	3.3	6.2	4.8	3.0	0.1	FS/CL	Moderate	Gray	No	No	1	MD	Many	0	0	0
34	Edge	6.4	8.2	7.3	1.8	0.4	SI	High	Brown	No	No	1	FLOC	None	0	0	0
35	Edge	3.8	4.8	4.3	1.1	0.2	CL	Low	Brown	No	No	0	MD	Many	0	0	0
36	Edge	8.2	12.5	10.4	4.3	0.7	CL	Low	Brown	No	No	0	DIST	Many	0	0	0
37	Edge	20.5	21.0	20.7	0.5	-	CL	Low	Brown	No	No	0	IND	None	0	0	0
38	Edge	5.7	10.3	8.0	4.6	0.2	CL	Low	Brown	No	No	0	DIST	Some	0	0	0
39	Edge	20.9	21.3	21.1	0.4	-	SICL	High	Brown	No	No	0	EVEN	None	0	0	0/1
40	Edge	12.7	13.1	12.9	0.4	0.2	SI	High	Brown	No	No	2	EVEN	None	0	2	0/17
41	Edge	0.7	1.1	0.9	0.4	0.2	FS/CL	Moderate	Brown	No	No	1	BED,DIST	None	0	0	0
42	Edge	12.3	13.2	12.7	0.9	0.8	MS/CL	Moderate	Brown	No	No	1	BED	None	0	1	0
43	Edge	11.8	12.1	12.0	0.3	0.9	SI	High	Brown	No	No	0	EVEN	None	0	0	0

Table C3

General Comparison of Sediment Profile Image Data from the Lower Study Site (LS, Delaware Bay) and Upper Study Site (US, Delaware River) Sampled During Hopper Dredge Loading and Overflow Tests

Feature	Location	
	Lower Study Site	Upper Study Site
Sediments	Homogeneous, Sands	Heterogeneous, Mainly Clays and Silt-Clays
Sediment Layering	Sediment Grain Size Changes	Color and Sediment Grain Size Changes
Prism Penetration	Shallow	Deep
Surface Relief	Physical Bed Forms	Biogenic Pits and Mounds
Suspended Material	Mostly Background Sediments	Mostly Background Sediments
Dredged Material	Detected at 3 Stations	Not Detected
Hopper Overflow	Detected at 1 Station	Detected at 1 Station
Hydrocarbon Contamination	Not Detected	Detected at 1 Station
Epifauna	Not Detected	Not Detected
Amphipod or Worm Tubes	Scarce	Common
Infauna	Not Detected	Common

Appendix D

Summary of Technical Findings:

96-hr Bioassay with *Mysidopsis bahia* and *Menidia beryllina*

CEWES-ES-F (70-1r)

17 Nov 98

MEMORANDUM FOR: Mr. Jerry Miller, (CEWES-EE-A)

Thru:
Dr. Todd Bridges, (CEWES-ES-F)

SUBJECT: Narrative Summary of Technical Findings of a 96-hr Bioassay with Delaware River Sediment and Water.

1. Please find enclosed a letter report summarizing the results of bioassays conducted with *Mysidopsis bahia* and *Menidia beryllina* exposed to concentrations of filtered elutriate.
2. If you have any questions please call me at (601) 634-4027 or Dr. Todd Bridges at (601) 634-3626.

ALFREDA GIBSON
Research Biologist
CEWES-ES-F

Summary of Technical Findings: 96-hr bioassay with *Mysidopsis bahia* and *Menidia beryllina*

1. Background: As part of an effort to determine the possible biological effects of water column exposure to Delaware River sediment, Mr. Jerry Miller (EED) requested that the Aquatic Biological Effects Team (ABET) conduct acute 96-hr elutriate bioassays on the material with survival being the observed endpoint. The two species used were *Mysidopsis bahia* and *Menidia beryllina*. This report summarizes the results of that study.
2. Technical Approach: 96-hr elutriate bioassays using the mysid shrimp *Mysidopsis bahia* and the inland silverside *Menidia beryllina* were conducted according to methods described in the CE/EPA Inland Testing Manual (1998) (Tables D1 and D2). Four treatments were evaluated:
1) *Mysidopsis bahia* exposed in R1-HO-TOX (coarse-grained material at 30 o/oo) (Table D3); *Mysidopsis bahia* exposed to R2-HO-TOX (fine-grained material at 6 o/oo) (Table D4); *Menidia beryllina* exposed to R2-HO-TOX (fine-grained material at 6 o/oo) (Table D5); and *Menidia beryllina* exposed to R1-HO-TOX (coarse-grained material at 30 o/oo) (Table D6). The filtered elutriate was diluted with our standard laboratory control water 40 fathoms (6 o/oo and 30 o/oo) to yield the following concentrations: 0; 6.25; 12.5; 25; 50; and 100% elutriate. Each treatment was replicated five times. The test was conducted using *Mysidopsis bahia* that were 5 days old and *Menidia beryllina* that were 9 days old. *Mysidopsis bahia* were fed newly hatched brine shrimp daily (0.2 mg) and *Menidia beryllina* were fed newly hatched brine shrimp on day 2 of the test (0.2 mg). Each beaker was provided trickle-flow aeration and covered with a watch glass to minimize evaporation.
3. Results: 96-hr survival of *Mysidopsis bahia* in the R1-HO-TOX (30 o/oo, coarse-grained material) exposures survival ranged from 100 to 88% (Table D1). Survival in R2-HO-TOX (6 o/oo fine-grained material) ranged from 90 to 0% with 0% survival in the 50 and 100% elutriate treatments (Table D1). 96-hr survival of *Menidia beryllina* in R1-HO-TOX (30 o/oo coarse-grained material) survival ranged from 88% -68%. Survival in R2-HO-TOX (6 o/oo fine-grained material) with ranged from 98 to 0% with 4% - 0% survival in the 50 and 100% exposures (Table D2). The trimmed spearman-karber method was used to calculate LC₅₀ values (Hamilton et al. 1978). *Mysidopsis bahia* in R2-HO-TOX (6 o/oo) had an LC₅₀ value of 30.04% (23.44 - 38.50 lower - upper confidence limit). *Menidia beryllina* in R2-HO-TOX (6 o/oo) had an LC₅₀ value of 31.66 % (27.54 - 36.40 lower -upper confidence limits). An LC₅₀ value could not be calculated for *Mysidopsis bahia* or *Menidia beryllina* in R1-HO-TOX treatments because neither had mortality values greater than 50%.

Survival met or exceeded the test acceptability criterion of 90% in the 6 o/oo and 30 o/oo *Mysidopsis bahia* controls, and also in the 6 o/oo *Menidia beryllina* control. Survival in the 30 o/oo *Menidia beryllina* control

was slightly below the criterion at 88% but is not considered to render the test invalid.

Water quality data are presented in Tables D7 through D10. The pH, dissolved oxygen, and temperature levels were within an acceptable range for conducting toxicity studies with the two test species. Ammonia levels (NH_3) were exceedingly higher than the LC_{50} of 1.00 mg/L for 5-day old *Mysidopsis bahia* or the LC_{50} of 1.24 mg/L for 9-days old Menidia beryllina (USEPA 1989).

In conclusion, R1-HO-TOX exposures did not adversely affect survival of either test species, whereas the mortality observed in R2-HO-TOX at 6 o/oo with both species can be attributed to the high level of NH_3 .

4. References:

Hamilton, M.A., Russo, R.C., and Thurston, R.V. (1978). "Trimmed Spearman-Karber Method for estimating median lethal concentration in toxicity bioassays," *Environ. Sci. Tech.* 12(4): 417.

USEPA. (1989). "Ambient water quality criteria for ammonia (Saltwater)-1989," Office of Water Regulations and Standards, Criteria and Standards Division, EPA 440/5-88-004, Washington, DC.

USEPA and USACE. (1998). "Evaluation of dredged material proposed for discharge in waters of the U.S. -Testing manual," EPA-823-B-98-004, Washington, DC.

Table D1
Summary Survival Data for *Mysidopsis bahia* Exposed to Delaware River Elutriates

Treatment	Elutriate Concentration	Mean Percent Survival, standard deviation
R1-HO-TOX (30 o/oo)	0	100 (0.00)
	6	88 (0.84)
	12	96 (0.55)
	25	92 (0.84)
	50	90 (1.22)
	100	92 (0.45)
R2-HO-TOX (6 o/oo)	0	90 (0.00)
	6	76 (1.67)
	12	66 (2.30)
	25	82 (1.30)
	50	0 (0.00)
	100	0 (0.00)

Table D2
Summary Survival Data for *Menidia beryllina* Exposed to Delaware River Elutriates

Treatment	Elutriate Concentration	Mean Percent Survival, standard deviation
R1-HO-TOX (30 o/oo)	0	88 (0.84)
	6	70 (1.58)
	12	68 (1.64)
	25	78 (1.79)
	50	80 (1.22)
	100	74 (1.82)
R2-HO-TOX (6 o/oo)	0	90 (0.71)
	6	68 (0.45)
	12	98 (0.45)
	25	78 (1.64)
	50	4 (0.89)
	100	0 (0.00)

Table D3
96-hr Survival Data for *Mysidopsis bahia* Exposed to R1-HO-TOX (coarse-grained material) Elutriates at 30 o/oo

Treatment, %	Replicate	Total Number Alive
Control	1	10
Control	2	10
Control	3	10
Control	4	10
Control	5	10
6	1	8
6	2	10
6	3	9
6	4	9
6	5	8
12	1	10
12	2	9
12	3	9
12	4	10
12	5	10
25	1	9
25	2	9
25	3	8
25	4	10
25	5	10
50	1	9
50	2	9
50	3	10
50	4	7
50	5	10
100	1	9
100	2	10
100	3	9
100	4	9
100	5	9

Table D4
96-hr Survival Data for *Mysidopsis bahia* Exposed to R2-HO-TOX
(fine-grained material) Elutriates at 6 o/o

Treatment, %	Replicate	Total Number Alive
Control	1	9
Control	2	9
Control	3	9
Control	4	9
Control	5	9
6	1	8
6	2	9
6	3	7
6	4	9
6	5	5
12	1	8
12	2	6
12	3	9
12	4	7
12	5	3
25	1	7
25	2	7
25	3	9
25	4	8
25	5	10
50	1	0
50	2	0
50	3	0
50	4	0
50	5	0
100	1	0
100	2	0
100	3	0
100	4	0
100	5	0

Table D5
96-hr Survival Data for *Menidia beryllina* Exposed to R2-HO-TOX
(fine-grained material) Elutriates at 6 o/o

Treatment, %	Replicate	Total Number Alive
Control	1	9
Control	2	9
Control	3	9
Control	4	8
Control	5	10
6	1	7
6	2	7
6	3	7
6	4	6
6	5	7
12	1	10
12	2	10
12	3	9
12	4	10
12	5	10
25	1	10
25	2	7
25	3	9
25	4	7
25	5	6
50	1	0
50	2	0
50	3	0
50	4	0
50	5	2
100	1	0
100	2	0
100	3	0
100	4	0
100	5	0

Table D6 96-hr Survival Data for <i>Menidia beryllina</i> Exposed to Elutriates Made from R1-HO-TOX (coarse-grained material) at 30 o/oo		
Treatment, %	Replicate	Total Number Alive
Control	1	9
Control	2	8
Control	3	10
Control	4	8
Control	5	9
6	1	6
6	2	9
6	3	8
6	4	5
6	5	7
12	1	8
12	2	7
12	3	8
12	4	4
12	5	7
25	1	9
25	2	10
25	3	8
25	4	6
25	5	6
50	1	8
50	2	10
50	3	7
50	4	7
50	5	8
100	1	7
100	2	7
100	3	10
100	4	8
100	5	5

Table D7
Water Quality Parameters for *Mysidopsis bahia* Exposed to R1-HO-TOX Elutriates at 30 o/oo

Treatment	Replicate	D.O. mg/L	pH	Salinity, ppt	Temp. °C	NH ₃ , mg/L composite
Control (initial)	1	5.50	7.85	30	21.7	
(final)		5.84	7.83	30	22.8	1.00
(initial)	3	5.98	7.85	30	21.7	
(final)		6.10	7.80	30	22.8	
(initial)	5	6.11	7.85	30	22.1	
(final)		6.20	7.80	30	22.8	
6 % (initial)	1	5.87	7.89	30	22.1	
(final)		6.08	7.88	30	22.8	1.38
(initial)	3	5.86	7.87	30	21.7	
(final)		6.10	7.87	30	22.7	
(initial)	5	5.85	7.86	30	21.5	
(final)		6.10	7.87	30	22.8	
12 % (initial)	1	6.00	7.85	30	23.1	
(final)		6.92	7.86	30	22.8	1.81
(initial)	3	6.15	7.89	30	22.0	
(final)		6.83	7.88	30	22.9	
(initial)	5	6.00	7.87	30	22.0	
(final)		6.22	7.86	30	23.0	
25 % (initial)	1	6.10	7.85	30	21.8	
(final)		6.19	7.85	30	22.7	1.32
(initial)	3	6.00	7.83	30	21.8	
(final)		6.30	7.84	30	22.7	
(initial)	5	5.98	7.80	30	21.8	
(final)		6.10	7.83	30	22.7	

(Continued)

Table D7 (Concluded)

Treatment	Replicate	D.O. mg/L	pH	Salinity, ppt	Temp. °C	NH ₃ , mg/L composite
50 % (initial)	1	6.10	7.80	30	21.7	
		6.20	7.80	30	22.7	0.67
(initial)	3	5.95	7.82	30	21.7	
		5.99	7.81	30	22.0	
(initial)	5	5.97	7.70	30	21.7	
		6.10	7.79	30	22.0	
100 % (initial)	1	5.97	7.65	28	21.7	
		6.10	7.70	28	22.0	1.53
(initial)	3	5.96	7.69	28	22.7	
		6.10	7.70	28	22.8	
(initial)	5	5.94	7.64	28	22.7	
		6.05	7.69	28	22.8	

Table D8
Water Quality Parameters for *Mysidopsis bahia* Exposed to R2-HO-TOX Elutriates at 6 o/oo

Treatment	Replicate	D.O. mg/L	pH	Salinity, ppt	Temp. °C	NH ₃ , mg/L composite
Control (initial)	1	6.10	7.34	6	22.0	
(final)		5.98	7.80	6	23.0	1.20
(initial)	3	6.08	7.29	6	22.0	
(final)		6.00	7.70	6	23.1	
(initial)	5	6.06	7.30	6	22.0	
(final)		6.00	7.77	6	23.0	
6 % (initial)	1	6.13	7.50	6	21.7	
(final)		5.35	7.83	6	23.0	3.63
(initial)	3	6.13	7.55	6	21.7	
(final)		5.29	7.84	6	23.0	
(initial)	5	6.19	7.55	6	21.7	
(final)		5.30	7.82	6	23.0	
12 % (initial)	1	6.21	7.53	6	21.6	
(final)		5.20	7.96	6	23.1	5.04
(initial)	3	6.20	7.55	6	21.6	
(final)		5.30	7.97	6	23.0	
(initial)	5	6.21	7.57	6	21.6	
(final)		5.75	7.97	6	23.0	
25 % (initial)	1	6.11	7.62	6	21.6	
(final)		5.30	8.10	6	23.0	7.33
(initial)	3	6.10	7.60	6	21.6	
(final)		5.29	8.09	6	23.0	
(initial)	5	6.10	7.64	6	21.6	
(final)		5.30	8.13	6	23.1	

(Continued)

Table D8 (Concluded)

Treatment	Replicate	D.O. mg/L	pH	Salinity ppt	Temp. °C	NH ₃ , mg/L composite
50 % (initial)	1	6.00	7.65	5	21.7	
		5.20	8.13	5	23.1	12.4
(initial)	3	6.05	7.66	5	21.7	
		5.40	8.15	5	23.0	
(initial)	5	6.00	7.60	5	21.7	
		5.30	8.16	5	23.0	
100 % (initial)	1	5.35	7.60	6	22.0	
		5.50	8.20	6	23.0	21.2
(initial)	3	5.45	7.67	6	22.0	
		5.39	8.17	6	23.0	
(initial)	5	5.39	7.67	6	21.9	
		5.40	8.17	6	23.1	

Table D9
Water Quality Parameters for *Menidia beryllina* Exposed to R1-HO-TOX Elutriates at 30 o/oo

Treatment	Replicate	D.O. mg/L	pH	Salinity ppt	Temp. °C	NH ₃ , mg/L composite
Control (initial)	1	5.45	7.83	30	21.7	
(final)		7.10	7.73	30	23.1	1.05
(initial)	3	5.98	7.84	30	21.7	
(final)		7.06	7.67	30	23.1	
(initial)	5	6.17	7.85	30	21.7	
(final)		7.08	7.74	30	23.0	
6 % (initial)	1	5.85	7.85	30	21.7	1.22
(final)		7.23	7.86	30	23.1	
(initial)	3	5.88	7.85	30	21.5	
(final)		7.20	7.84	30	23.1	
(initial)	5	5.93	7.86	30	21.6	
(final)		7.23	7.86	30	23.1	
12 % (initial)	1	5.98	7.85	30	22.0	
(final)		7.32	7.87	30	23.1	1.36
(initial)	3	6.13	7.85	30	21.9	
(final)		6.95	7.88	30	23.1	
(initial)	5	5.89	7.85	30	21.9	
(final)		6.65	7.87	30	23.1	
25 % (initial)	1	6.03	7.85	30	21.8	
(final)		6.07	7.91	30	23.1	1.27
(initial)	3	5.95	7.83	30	21.8	
(final)		6.25	7.91	30	23.0	
(initial)	5	6.02	7.80	30	21.8	
(final)		6.03	7.88	30	23.1	

(Continued)

Table D9 (Concluded)

Treatment	Replicate	D.O. mg/L	pH	Salinity ppt	Temp. °C	NH ₃ , mg/L composite
50 % (initial)	1	5.59	7.70	30	21.8	
		5.88	7.93	30	23.1	1.22
(initial)	3	5.95	7.80	30	21.8	
		6.11	7.92	30	23.1	
(initial)	5	5.85	7.80	30	21.7	
		5.64	7.97	30	23.1	
100 % (initial)	1	5.95	7.64	30	21.7	
		5.58	7.97	30	23.1	1.45
(initial)	3	5.96	7.64	30	21.7	
		5.54	7.96	30	23.1	
(initial)	5	5.93	7.63	30	21.7	
		5.69	7.95	30	23.1	

Table D10
Water Quality Parameters for *Menidia beryllina* Exposed to R2-HO-TOX Elutriates at 6 o/oo

Treatment	Replicate	D.O. mg/L	pH	Salinity ppt	Temp. °C	NH ₃ , mg/L composite
Control (initial)	1	6.10	7.24	6	22.2	
(final)		5.08	7.65	6	23.1	1.81
(initial)	3	6.10	7.26	6	22.2	
(final)		5.38	7.57	6	23.1	
(initial)	5	6.06	7.30	6	22.2	
(final)		5.33	7.66	6	23.1	
6 % (initial)	1	6.13	7.47	6	21.7	
(final)		5.21	7.86	6	23.0	4.62
(initial)	3	6.14	7.54	6	21.7	
(final)		5.30	7.84	6	23.1	
(initial)	5	6.21	7.55	6	21.7	
(final)		5.25	7.86	6	23.1	
12 % (initial)	1	6.20	7.50	6	21.4	
(final)		5.00	7.97	6	23.0	6.20
(initial)	3	6.25	7.55	6	21.4	
(final)		5.00	8.00	6	23.0	
(initial)	5	6.20	7.55	6	21.4	
(final)		5.25	7.95	6	23.0	
25 % (initial)	1	6.10	7.63	6	21.7	
(final)		5.23	8.21	6	23.0	5.95
(initial)	3	6.00	7.63	6	21.7	
(final)		5.00	8.20	6	23.1	
(initial)	5	6.10	7.64	6	21.7	
(final)		5.25	8.16	6	23.1	

(Continued)

Table D10 (Concluded)

Treatment	Replicate	D.O. mg/L	pH	Salinity ppt	Temp. °C	NH ₃ , mg/L composite
50 % (initial)	1	6.00	7.65	6	21.4	
		5.10	8.43	6	23.0	12.4
(initial)	3	6.00	7.66	6	21.4	
		5.01	8.44	6	23.0	
(initial)	5	6.00	7.66	6	21.5	
		5.00	8.46	6	23.0	
100 % (initial)	1	5.30	7.66	6	21.5	
		5.00	8.75	6	23.1	22.3
(initial)	3	5.31	7.67	6	21.5	
		5.08	8.75	6	23.0	
(initial)	5	5.23	7.67	6	21.7	
		5.01	8.71	6	23.0	

REPORT DOCUMENTATION PAGE

*Form Approved
OMB No. 0704-0188*

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. **PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.**

1. REPORT July 2002		2. REPORT TYPE Final report		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE Field Evaluation of Hopper Dredge Overflow for the Delaware River		5a. CONTRACT NUMBER			
		5b. GRANT NUMBER			
		5c. PROGRAM ELEMENT NUMBER			
6. AUTHOR(S) Jerry L. Miller, Michael R. Palermo, Thomas W. Groff		5d. PROJECT NUMBER			
		5e. TASK NUMBER			
		5f. WORK UNIT NUMBER			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Engineer Research and Development Center Environmental Laboratory 3909 Halls Ferry Road, Vicksburg, MS 39180-6199; U.S. Army Engineer District, Philadelphia Operations Division Wanamaker Building 100 Penn Square East, Philadelphia, PA 19107-3390		8. PERFORMING ORGANIZATION REPORT NUMBER			
		ERDC/EL TR-02-17			
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Engineer District, Philadelphia Philadelphia, PA 19107-3390		10. SPONSOR/MONITOR'S ACRONYM(S)			
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)			
12. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT Hopper dredges are often loaded past the point of overflow for economic reasons. As the hopper is filled, dredged material is stored in the hopper until overflow begins. The density of the hopper contents is increased by allowing the low-density supernatant to overflow back into the waterway. As the low-density supernatant overflows, the average density of the hopper contents increases. Thus, more material can be transported per trip to the disposal site or facility resulting in an economical loading. There is normally a tradeoff between the potential economic benefits and potential environmental effects. Overflow results in increased water column turbidity, and supernatant solids may be redeposited near the dredge site. Also, if sediments are contaminated, the overflow may result in some release of contaminants to the water column. Therefore, the relationship between dredge production, density of the hopper load, and the rate of material overflow are important variables in maximizing the efficiency of the dredging operation while minimizing harmful contaminant release.					
(Continued)					
15. SUBJECT TERMS Dredge production Dredged material Dredging Hopper dredges Overflow					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT UNCLASSIFIED	b. ABSTRACT UNCLASSIFIED	c. THIS PAGE UNCLASSIFIED			19b. TELEPHONE NUMBER (include area code)
184					

14. ABSTRACT (Concluded).

A field study was conducted during hopper dredging operations in the Delaware River and Delaware Bay area to quantify the potential load gains realized by overflow, the degree of suspended solids and contaminant release generated by overflow, and the dispersion of the overflow plume. Monitoring was conducted at two sites, one of predominately fine-grained material in the Delaware River, and the other of predominately coarse-grained material in Delaware Bay. This report summarizes the results of the study and describes the potential economic and environmental considerations for overflow at these sites.